

# Tools

Version 2025



**Weidmüller** 



# Tools

## Catalogue 6

Contents

Tools	Certification
	Cutting
	Stripping
	Crimping
	Pliers
	Screwdrivers
	Measuring / Testing
	Tool sets
	Automatic machines
	Wire end ferrules and insulated connectors
	Cable lugs
	Tools for the end of the day

A

B

C

D

E

F

G

H

I

J

K

L

Appendix	Service and support
Index	Search according to type or order number, worldwide activities

V

X

# Tools

## Cutting tools

Page B.4



## Sheathing strippers

Page C.12



## Cable cutter

Page B.6



## Stripping and cutting tools

Page C.4



## Crimping tools for wire end ferrules

Page D.9



## Crimping tools for other contacts

Page D.18



## Pressing tools

Page D.30



## Electrohydraulic tools

Page D.33



## Pliers

Page E.3



## Torque screwdrivers

Page F.6



**DMS manual**

Page F.12



**Digital voltage tester**

Page G.6



**Cable gland tools**

Page F.18



**Screwdrivers**

Page F.19



**Tool chest and cases**

Page H.4



**Wire end ferrules and insulated connectors**

Page J.4



**Crimp sets**

Page H.35



**Automatic machines and Wire Processing Center**

Page I.4



**Cable lugs**

Page K.9



**Tools for the end of the day**

Seite L.3



## Service and support

### Service connects – worldwide

Page V.2



- Service connects – worldwide
- Engineering services and customised products
- easyConnect – Your Industrial Service Platform
- Support Center
- Additional support services
- Weidmüller Configurator

### Digital ordering options

Page V.10



#### Purchasing made easy:

- Weidmüller eShop
- OCI interface
- EDI interface



# Ideally equipped for every work phase

## Increase efficiency and save time

The current boom in the sector is opening up new challenges for panel builders. On the one hand, the order books are full, but on the other hand, international competition is increasing, which in turn is leading to increased cost pressure. This dilemma will not be resolved by a single action alone, but rather by the consistent optimisation of the entire panel building process.

With Weidmüller, you have a strong partner by your side to support you in all work phases with perfectly coordinated solutions for your workshop. Based on many years of practical experience in panel building, we offer a comprehensive portfolio to effectively speed up your processes and increase your quality. Take a good look at our tools, markers, printers, software, automated systems and panel infrastructure for all work phases – from planning to installation and finally operation.

## Planning

With our software solutions for marking (M-Print® PRO), semi-automated cable assembly (WPC tool) and configuration (WMC), you are perfectly positioned in every project phase. Thanks to interfaces to your CAE system, you benefit from optimum data consistency from planning through to commissioning.



## Installation

Tools of certified premium quality, intuitive automatic stripping and crimping machines as a stand-alone or semi-automated solution, as well as a coordinated marking system enable you to save time and ensure safe assembly. At the same time, you minimise sources of error. Our end-to-end range is rounded off by versatile installation materials and infrastructure components for the panel. Besides our professional manual tools, we also offer you sets with an appropriate and efficient combination of tools and coordinating accessories, as well as a complete tool chest that has been developed in line with 5S and lean principles.

## Operation

Even after commissioning your panels, the perfect interaction of products and tools from a single source offers you sustainable efficiency gains. Our extensive range of measuring and testing tools provides you with reliable support for troubleshooting. Seamless marking of all panel components as well as digital data consistency simplify and speed up maintenance work. This helps you reduce downtimes and increase the efficiency of your process steps.




# Recognising and harnessing the potential of Industry 4.0

## Smart panel building increases efficiency

In traditional panel building, the product development process comprises numerous manual work steps. This means a high expenditure of resources and time as well as a natural source of error. A study by the University of Stuttgart on the subject of panel building 4.0\* shows that traditional panel builders spend the most time during the planning and installation phases. In other words: The project planning and circuit diagram design work steps tie up more than 50% of the working time during the planning stage. The reason for this is inconsistent engineering processes and increasingly complex requirements as a result of the growing project business. The many manual tasks in mechanical assembly and wiring during the installation stage account for more than 70% of the working time!

The biggest time sinks in traditional panel building

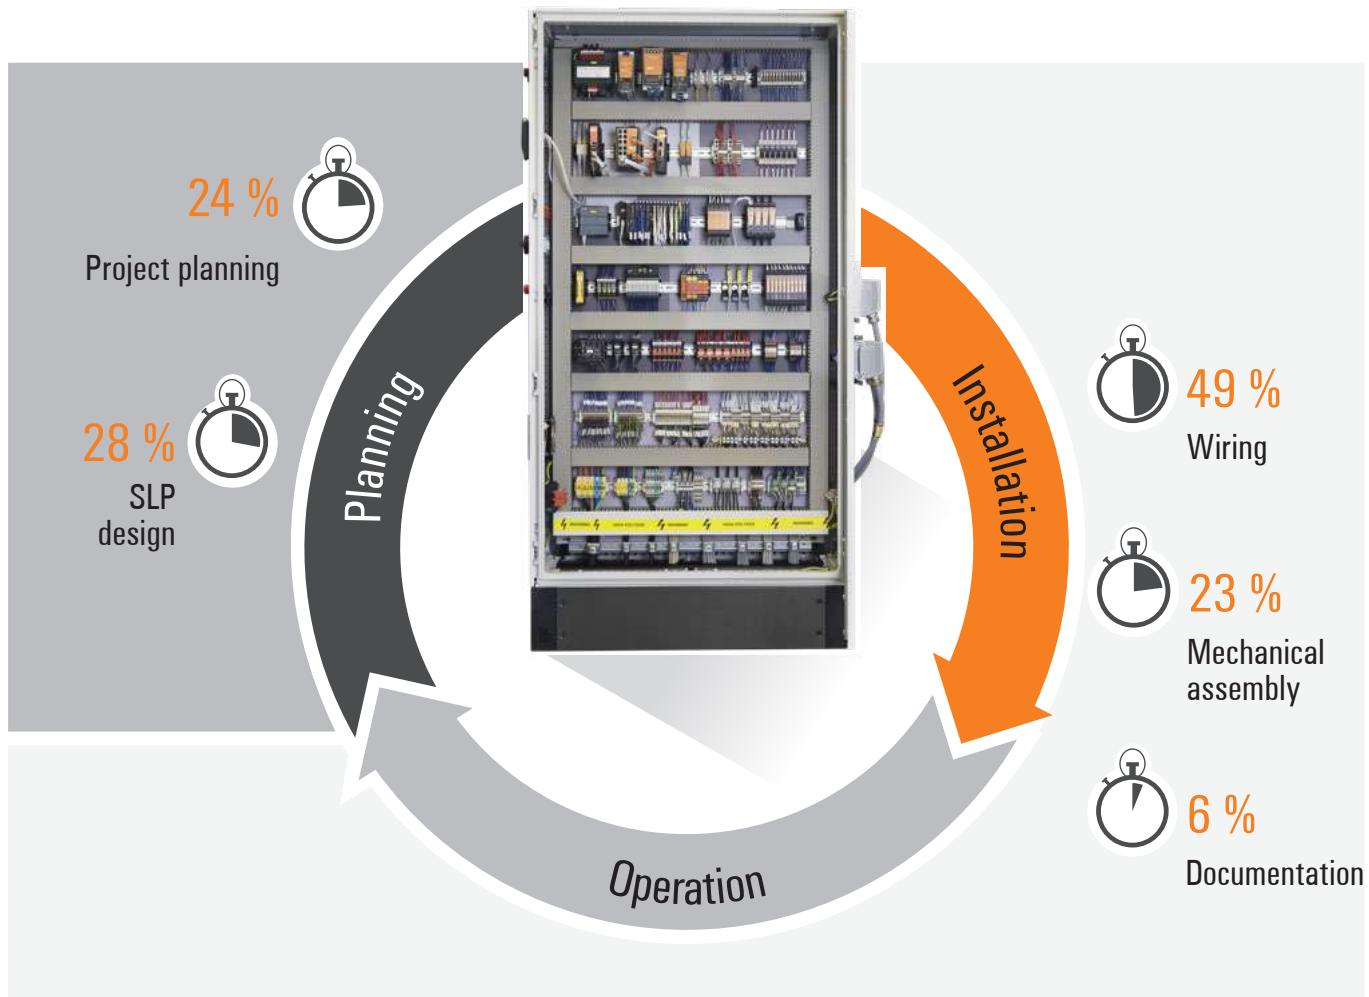

\*University of Stuttgart, Institute for Control Engineering of Machine Tools and Manufacturing Units, "Panel building 4.0 - A Study of the Potential of Automation and Digitalisation in the Production of Panels and Switching Systems in Traditional Mechanical and Plant Engineering".

# Greater productivity in the workshop

## Standardisation and automation

Above all, standardisation, automation and process-wide solutions offer considerable optimisation potential for inconsistent engineering processes and time-consuming, manual activities. At Weidmüller, we have focused very closely on these issues.

The result: A portfolio of complete solutions for the workshop where each work step perfectly flows into the next, and enabling processes to be 80% faster with 100% planning reliability.

### Optimisation potential from Weidmüller



# Cross-process solutions from Weidmüller

## Design

The Weidmüller Configurator (WMC) supports you in planning and configuring your panel, such as with assembled terminal strips. You import data sets from your eCAD system through an interface and simply transfer them back after they have been processed in the WMC.

## Planning


The M-Print® PRO marking software makes it much easier to plan and label markers. With the M-Print® PRO eCAD add-on, you connect your eCAD system with the marking software and perform intelligent automated component marking.

## Service

You benefit from the perfect interaction of our integrated portfolio, even during and after the commissioning of your panels. Seamless marking of all panel components as well as digital data consistency simplify and speed up maintenance work. This helps you reduce downtimes and increases the efficiency of the entire application.

## Purchasing

The consistent availability of all article and order numbers also applies to our E-shop and speeds up purchasing and reordering.

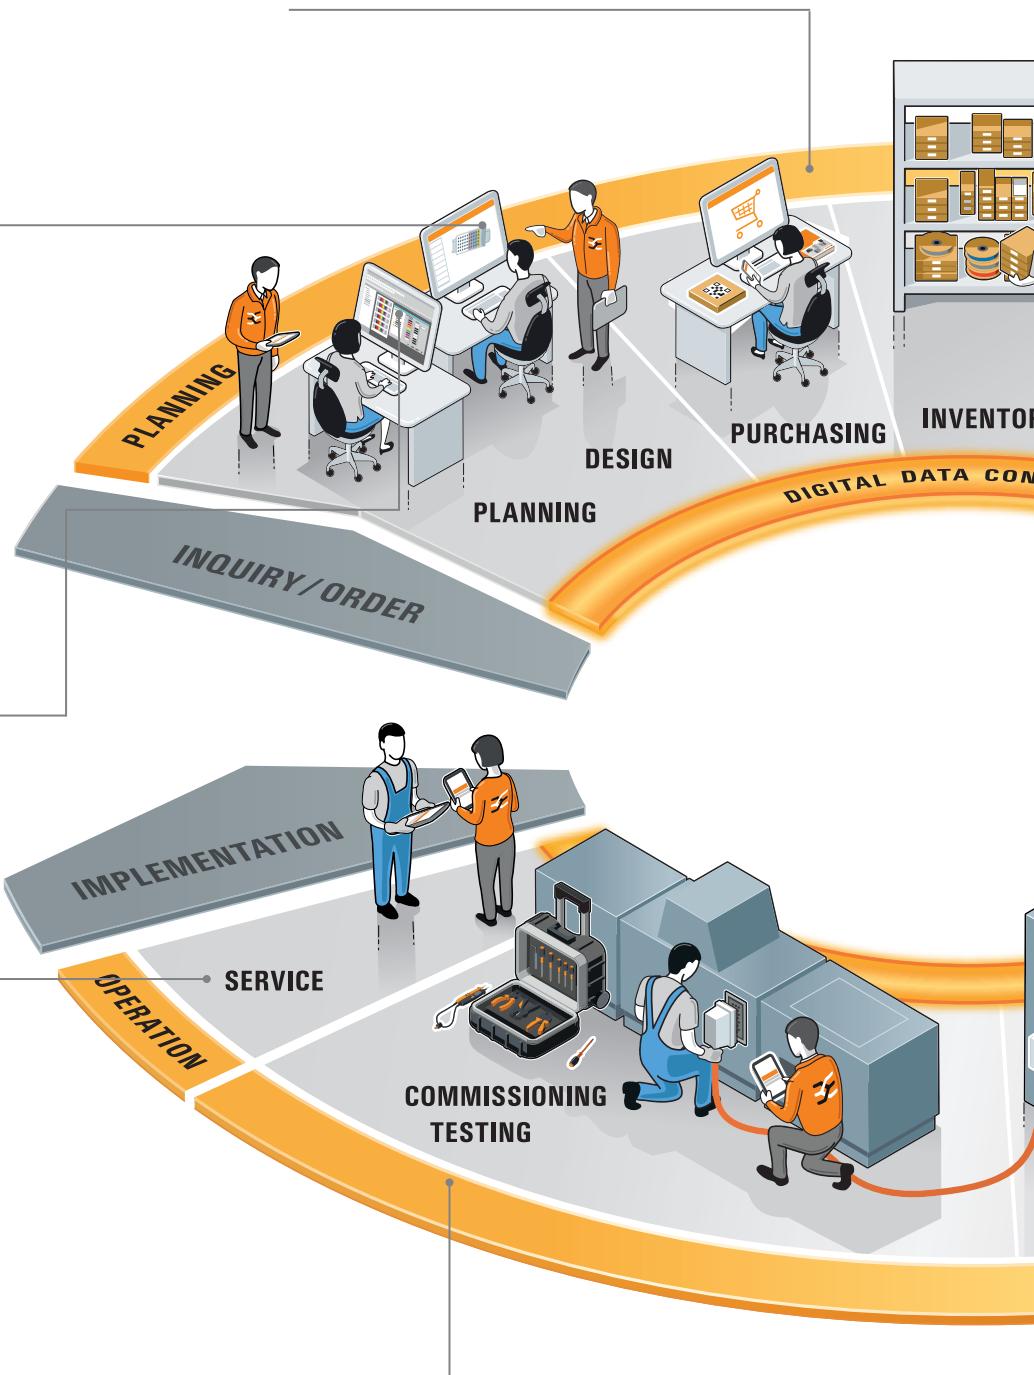

## Mechanics and electronics in partnership:


High-quality and certified measuring and testing tools facilitate the final testing of panels and always deliver reliable measured values.

## Warehousing

The markers of our MultiCard system are compatible with components such as terminal blocks, conductors, cables and devices from all manufacturers. Our MultiCard markers are available in almost 700 designs and can be individually printed. This reduces the number of marker variants that you always have to keep in stock.

## Mechanical work preparation

Our comprehensive range supports you in all phases of work preparation, such as with the required panel infrastructure as well as cutting and perforation tools for the mechanical preparation of your panel components.

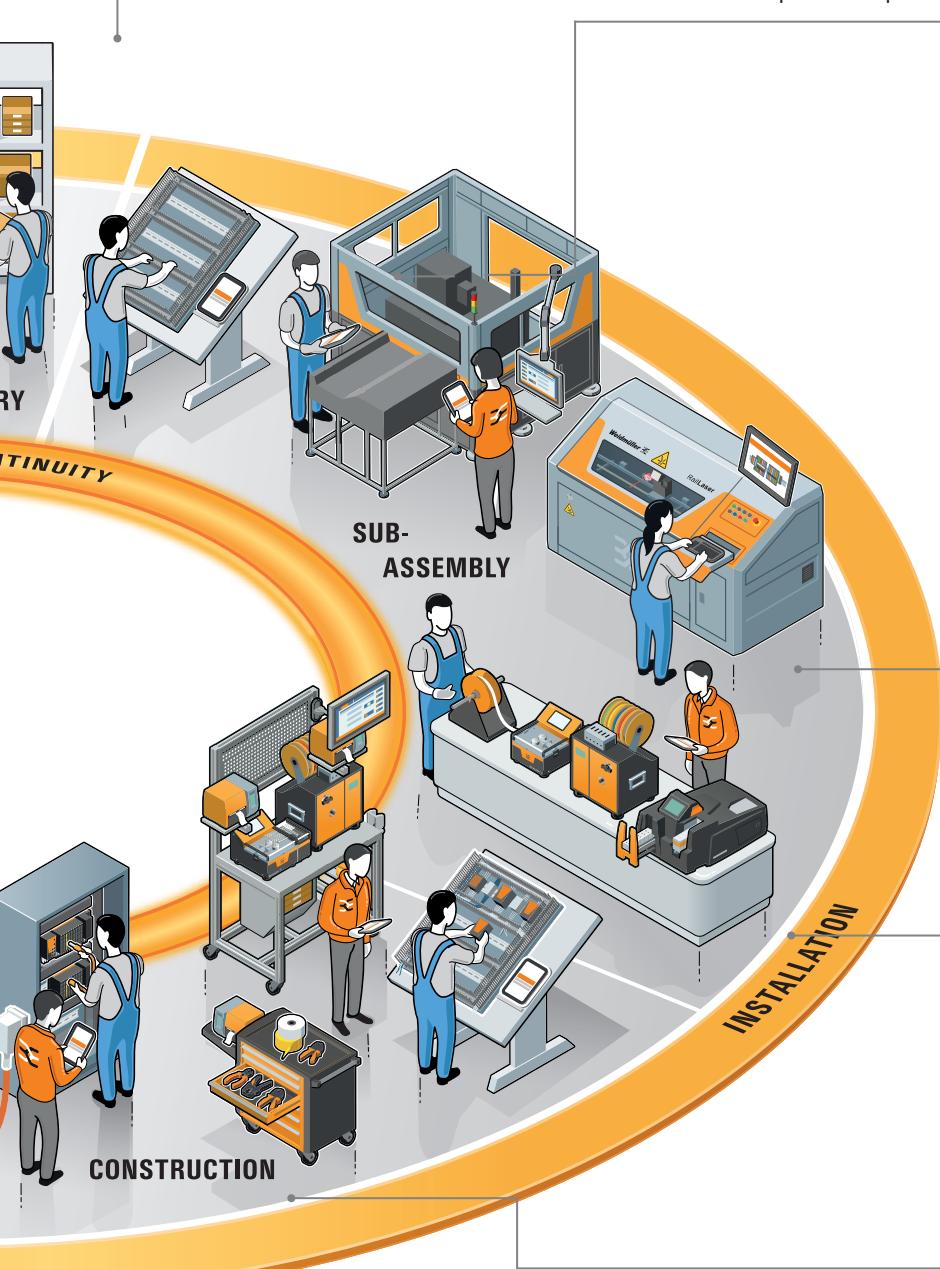

## Commissioning/testing

Your safety is the top priority when it comes to commissioning electrical systems and devices. Weidmüller's voltage and continuity testers comply with all relevant standards and you have peace of mind that your tests are performed in accordance with the regulations.

## Electrical work preparation

Our automated systems carry out repetitive tasks for you, such as the cutting to length, stripping and crimping of cables. The marking software M-Print® PRO directly controls printers such as the PrintJet CONNECT or the THM MultiMark and ensures that the right marker is printed for every component and every cable.

As stand-alone solutions or as a semi-automated Wire Processing Center (WPC) with your own planning software – our systems offer you maximum application flexibility.

## Workshop/design

Error sources are reduced in installation and commissioning thanks to the clear and transparent marking of all cables and components. Weidmüller's manual tools for cutting, stripping, crimping, testing and screwing offer you a great deal of efficiency through precision, high quality and ergonomic design. The semi-automated Wire Processing Center (WPC) enables individual process optimisation with significantly increased efficiency.

# Working with our tool, that's the new rule.

## Professional tools - just work faster and more efficiently

With Weidmüller's professional tools, you can do your work faster, better, and more precisely than ever before. Even demanding tasks are easy and fatigue-free – almost like have superpowers.

For over 40 years, we have been developing and manufacturing ergonomic, durable quality tools to meet the highest demands and optimise your work processes. Rely on our experience and be prepared for new challenges every day.



**Strip it – don't rip it**

Precise stripping tools that give you an instant grip on any insulation

**Chapter D****Tighten it – don't slip**

Robust screwdrivers to handle any screw in the twinkling of an eye

**Chapter G****Cut it – don't squeeze it**

Professional cutting tools for demanding tasks indoors and outdoors

**Chapter C****Crimp it – don't crush it**

Reliable crimping tools that let you connect wire-end ferrules and contacts in a flash

**Chapter E****Test it – don't be shocked**

Professional testing tools that guarantee, you never miss a fault

**Chapter H**



# Certification

---

<b>Certification</b>	Tool Certification	A.2
	Manufacturing expertise	A.5

---

## Tool certification – the quality seal for your process

Weidmüller understands its responsibility to provide quality tools to ensure your processes run smoothly. To give our customers peace of mind, Weidmüller has a range of services to check their tools and even check the compatibility of the tools with the customers' wires and connectors. This service is called "Tool Certification" and will be explained in detail over the next few pages.



Weidmüller certification stands for quality and reliability. When successful, a certified tool receives a certificate outlining the test results and confirming the overall result. At the same time, a quality seal is attached to the tool as a symbol that this product fulfils all the necessary requirements, along with information regarding when the next certification is due.

There are three types of certification:

- New tool certification
- Recertification
- Customer-specific confirmation

We aim to fulfil all of our customers' needs, so if you require a service that is not listed here then please get in touch with your local sales contact.



## Certification services at a glance

### Certification when reordering

Prior to delivery, we arrange for your new tool to be certified by production-independent bodies and additional tests. Afterwards we guarantee the quality of our tool with a letter and seal.

### Recertification

Has your tool been in use for a long time and you want to make sure that it still meets all standards? Send it to our Service department and we will test it thoroughly.

### Process monitoring

Do you want to secure your process without having to send in your tools on a regular basis for recertification? Not a problem. All you have to do is crimp sample conductors and send these to us. We then check the crimping quality for you.



**Do you need personal support for commissioning and setting up your automatic machines or printers?**  
We are happy to help – even on site.



**You want your tools to always work perfectly and reliably?**  
Maintenance of hand tools, automatic machines and printers - a long service life of your equipment is important to us.



**Despite all the care you take, has something been broken?**  
In case of service, we are happy to support you with spare parts and repairs.



**Your machine shows a malfunction, even though a large order is about to be completed?**  
A pool of rental equipment is available for you to reduce downtime. And even internationally.



**Do you have increased requirements for your (crimp) connections?**

For your guaranteed safety, we offer calibrations and test certificates for many of our tools. In addition, we test your individual connection with our calibrated measuring equipment using the current standards. You send us your assembled conductors with the necessary information and receive a test report from us.



**It takes a manufacturer who knows his clients' work to develop just the right tools for the job**



Our professional tools are the result of an intensive development process, in direct response to customer feedback on the demands made of them in practice. Because, as a manufacturer, we believe that the right tools can only be developed for you if we are familiar with your business, understand your work processes and unrelentingly endeavour to help make them as effective as possible. In addition, a long tool lifespan and application-based functionality are just as important to us in our work as creating the perfect working conditions. A good tool has to fit snugly in your hand, which is why we attribute such importance to achieving the best possible ergonomics, optimally distributing a tool's weight and making it easy to use. This protects you and boosts your efficiency.



Testing the endurance of stripax® in the Weidmüller laboratory



10,000 V test for 1,000 V safety for our cutting tools.

#### Tested quality in all areas

We make sure that the quality of our tools is consistently maintained by subjecting them to rigorous tests in our own laboratory. This quality control process also incorporates the contacts and conductors that are worked on with our tools, and these undergo thorough testing together with our terminals.

Whether it's a test of insertability into the rated clamping space, a bending test or a test of the pull-out forces, the complex, cross-linked testing procedures give you the peace of mind that both products and tools will work together in harmony.

This means you can benefit from having precision tools that deliver unfailing functionality and excellent manageability. This in turn helps enable you to optimise your work processes and increase your productivity.

Products are invariably only as good as the tools with which they are processed. Which is why everything goes hand in hand at Weidmüller. We have just the right tools for all your needs, covering everything from terminal mounting to the installation of sensitive electronic components.

We aim to simplify your work and help boost your profitability.



# Cutting

## Cutting


Introduction	B.2
Cutting tools	B.4
Cable cutter	B.6
Cutting and releasing tools	B.8
Mounting rail cutter	B.11
Hydraulic hole puncher	B.14
Electrician's cutters / scissors	B.18

# Cut it – don't squeeze it

## Working with our tool, that's the new rule.

### Professional cutting tools for demanding tasks indoors and outdoors

Develop superpowers for cutting through copper and aluminium conductors. With our professional cutting tools, you can work faster and more precisely than ever before. You even complete demanding cutting tasks without much effort – regardless of the cable cross-section and the installation environment. We ensure this with optimally shaped cutting edges, sophisticated mechanics, and perfect ergonomics. No matter what you have in mind: you will find the right professional tool for your next challenge in our range.

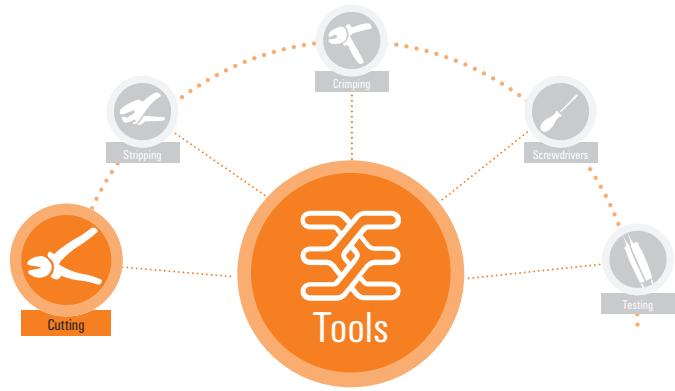

At Weidmüller the term "cutting" refers to the severing of cables, wires and conductors of copper or aluminium with an appropriate tool for the application.

The requirement for all cutting tools is to perform a smooth, straight cut without deforming the conductor.

According to **DIN 8588**, experts differentiate between shear cutting, wedge-action cutting, tearing and breaking. Shear cutting is employed particularly in the cutting of cables, wires and conductors. Cutting tools with cross blades should perform an oblique cut and operate without play.


The essential quality characteristics for professional cutting tools are a cutting edge shape which is suited to, and optimised for, the corresponding application, so that the manual forces required for cutting remain low. This allows single-handed operation.

Tools by Weidmüller comply with all requirements imposed on professional cutting tools.


## Movement of the blades

We differentiate between two basic cutting processes:

- Push cut
- Draw cut

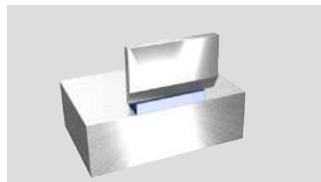


In **push cut**, the cutting movement is perpendicular between tool and workpiece.

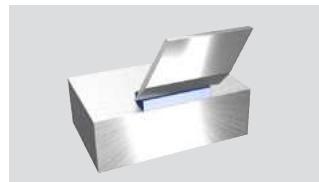


In **draw cut**, the cutting movement is oblique to the tool.

## Position of the blades

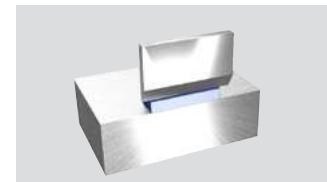

In **position 1**, the blades act directly and over the whole length, i.e. considerable force is required.

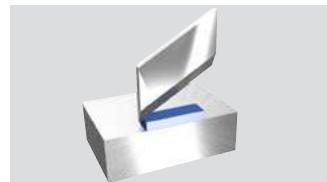

In **position 2**, the blades cross as in a pair of scissors, the cut is therefore "offset" and requires less force.

## Cutting

The process chain for cable processing always starts with cutting the conductor. It is important to ensure that a clean, square and above all crush-free cut is made.



Sheared-off conductor



Pulled out conductor



Crushed cable



Example of a clean cut

**Cutting tools**

- The cutting blade design for different cable sizes increases the quality of the cuts for smaller cross-sections
- Not suitable for steel wires, steel-armoured cables, aluminium alloys and hard-drawn copper conductors!
- Cutting without deformation of the conductor
- Do not cut live conductors
- Individually tested protective insulation, 1000 V, VDE and GS tested in accordance with EN/IEC 60900
- Optimised handle ergonomics
- Minimal hand force required

**B****Technical data****Max. cutting performance, copper cable acc. to EN 60228**

Copper cable - solid, max.  
Copper cable - stranded, max.  
Copper cable - flexible, max.



**Max. cutting performance, aluminium cable acc. to EN 60228**

Stranded aluminium cable, max (mm<sup>2</sup>)  
Stranded aluminium cable, max. diameter

**Tool data**

Depth / Width / Height

Weight

**Note****Ordering data****Version****KT 8**

Suggested cross-section range /  
Empfohlener Querschnittsbereich


**KT8**50 mm<sup>2</sup> / 1 AWG35 mm<sup>2</sup> / 2 AWG25 mm<sup>2</sup> / 4 AWG35 mm<sup>2</sup> / 2 AWG

9 mm

30 / 185 / 65.5 mm

180 g

Tool closed

**KT 8S****Cutting tool with spring**

Suggested cross-section range /  
Empfohlener Querschnittsbereich

**KT8S**50 mm<sup>2</sup> / 1 AWG35 mm<sup>2</sup> / 2 AWG25 mm<sup>2</sup> / 4 AWG35 mm<sup>2</sup> / 2 AWG

9 mm

30 / 185 / 65.5 mm

220 g

KT 12



KT 14



KT 22



max. 12 mm

max. 16 mm<sup>2</sup>

max. 25 mm<sup>2</sup>

max. 35 mm<sup>2</sup>

Suggested cross-section range /  
Empfohlener Querschnittsbereich



max. 14 mm

max. 16 mm<sup>2</sup>

max. 35 mm<sup>2</sup>

max. 70 mm<sup>2</sup>

Suggested cross-section range /  
Empfohlener Querschnittsbereich



max. 22 mm

max. 25 mm<sup>2</sup>

max. 50 mm<sup>2</sup>

max. 95 mm<sup>2</sup>

Suggested cross-section range /  
Empfohlener Querschnittsbereich



#### KT12

95 mm<sup>2</sup> / 3/0 AWG

70 mm<sup>2</sup> / 2/0 AWG

50 mm<sup>2</sup> / 1 AWG

70 mm<sup>2</sup> / 2/0 AWG

11 mm

30 / 225 / 63.5 mm

300 g

Tool closed

16 mm<sup>2</sup> / 6 AWG

35 mm<sup>2</sup> / 2 AWG

70 mm<sup>2</sup> / 2/0 AWG

70 mm<sup>2</sup> / 2/0 AWG

14 mm

30 / 225 / 63.5 mm

320 g

Tool closed

150 mm<sup>2</sup> / 4/0 AWG

95 mm<sup>2</sup> / 3/0 AWG

70 mm<sup>2</sup> / 2/0 AWG

95 mm<sup>2</sup> / 3/0 AWG

13 mm

31 / 249 / 71.5 mm

460 g

Tool closed

Type	Qty.	Order No.
KT 12	1	9002660000

Type	Qty.	Order No.
KT 14	1	1157820000

Single-core aluminium cable corresponds to single-wire sector cable

Type	Qty.	Order No.
KT 22	1	1157830000

**Cable cutter**

- One-hand operation
- Easy handling
- Minimal hand force required
- Release option in every cutting position
- Not suitable for steel wires, steel-armoured cables, aluminium alloys and hard-drawn copper conductors!
- Do not cut live conductors

**KT 40****KT 50****Technical data****Max. cutting performance, copper cable**

Copper cable - stranded, max.

Copper cable - flexible, max.

Copper sector cable

**Max. cutting performance, aluminium cable**Stranded aluminium cable, max (mm<sup>2</sup>)

Stranded aluminium cable, max. diameter

**Tool data**

Depth / Width / Height

Weight

**Note****Ordering data****Version**

Cu + Al: max. 40 mm

 Cu: max. 300 mm<sup>2</sup>  
 Al: max. 300 mm<sup>2</sup>


 Cu: max. 300 mm<sup>2</sup>
**Suggested cross-section range / Empfohlener Querschnittsbereich**

Cu + Al: max. 52 mm

 Cu: max. 400 mm<sup>2</sup>  
 Al: max. 400 mm<sup>2</sup>


 Cu: max. 400 mm<sup>2</sup>
**Suggested cross-section range / Empfohlener Querschnittsbereich**
**KT 40**300 mm<sup>2</sup> / 600 kcmil300 mm<sup>2</sup> / 500 kcmil

3 x 50 SM

300 mm<sup>2</sup> / 500 kcmil

40 mm

37 / 305 / 85 mm

795 g

**KT 50**400 mm<sup>2</sup> / 800 kcmil400 mm<sup>2</sup> / 800 kcmil

4 x 70 SM

400 mm<sup>2</sup> / 800 kcmil

52 mm

40 / 345 / 110 mm

1170 g

Type	Qty.	Order No.
KT 40	1	2993490000

Type	Qty.	Order No.
KT 50	1	2993500000



**Cutting and releasing tools**

Special release tool for the Weidmüller W-Series terminal connectors.

B

**WAW 1**

Notching tool




Tool for releasing poles from WQV 2.5 to WQV 35 cross connections used in Weidmüller W-Series terminal connectors.

**WAW 2**

Notching tool



Tool for punching out the cross-connection windows of the Weidmüller W-Series terminal connectors  
WSI 6 fuse terminal

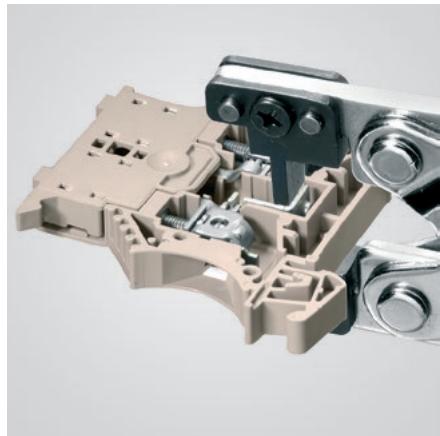**Technical data**

Length  
Depth  
Width  
Weight

Note

**Ordering data**

Version

Note

**WAW 1**

167 mm

227 g

**Type**

WAW 1 NEUTRAL

**Qty.**

1

**Order No.**

9004500000

**WAW 2**

205 mm

338 g

**Type**

WAW 2

**Qty.**

1

**Order No.**

9004510000

**Cutting and releasing tools**

Special cutting tool for clean pinch-free cutting of Weidmüller Z-Series cross-connections

**KT ZOV****Cutting tool****KT Mini**

Cutting tool for clean cutting of Weidmüller Z-Series cross-connections



∅ max. 7 mm   ● max. 6 mm<sup>2</sup>   ⚡ max. 10 mm<sup>2</sup>   ⚡ max. 10 mm<sup>2</sup>

**Technical data****Max. cutting performance, copper cable acc. to EN 60228**

Copper cable - solid, max.  
Copper cable - stranded, max.  
Copper cable - flexible, max.

**Max. cutting performance, aluminium cable acc. to EN 60228**

Stranded aluminium cable, max (mm<sup>2</sup>)  
Stranded aluminium cable, max. diameter

**Tool data**

Depth / Width / Height  
Weight

**Note****Ordering data****Version**

Type	Qty.	Order No.
KT ZOV	1	9002170000

**Note**

A large selection of cross-connectors can be found in our current Modular Terminals Catalogue.

Type	Qty.	Order No.
KT MINI	1	2876460000

## Cutting and releasing tools

## VKSW

## Wire channel cutter



Wire channel cutter for manual operation in cutting wiring channels and covers up to 125 mm wide and a wall thickness of 2.5 mm. Not suitable for plastics reinforced by fillers plastics.

- Cutting with no burrs or waste
- Longitudinal stop (1000 mm) with guide for precision angle cutting
- Table-top unit for mounting on workbench or similar workplaces
- Hardened cutting edges made from special steel

## Technical data

## Tool data

Depth / Width / Height  
Weight

## Note

290 / 280 / 285 mm  
15000 g

## Ordering data

## Version

Type	Qty.	Order No.
VKSW	1	1137530000

## Note

## Accessories

Spare blade  
Handle

Type	Qty.	Order No.
ERME VKSW	1	1251270000
VKSW HANDLE	1	2886200000

## Note

**TSLD****TSLD**

Terminal rail cutting and punching tool



Hand-operated mounting rails cutter for cutting and perforating DIN mounting rails made of steel or copper.

- Cutting with no burrs or waste
- Length stop (1000 mm) is included in delivery
- Table-top unit for mounting on workbench or similar workplaces
- Maximum sheet thickness steel 2 mm
- Maximum sheet thickness stainless steel 1.5 mm
- Lengthwise or crosswise perforation (12 x 6.4 mm cross and long perforations)

**Technical data****Housing specification**

Width  
Depth  
Height  
Weight

**Note****Ordering data****Ausführung****Hinweis****TSLD**

270 mm  
200 mm  
205 mm  
19000 g

Technical data without lever and length end stop

**Type**

Type	Qty.	Order No.
TSLD 5 G32	1	9918700000
TSLD 5 C20	1	3093050000
TSLD 5 C30	1	3093070000
TSLD 5 C40	1	3103020000

Copper earthing bar (10x3 mm)



TH 15-5.5 mm according to EN 60715



TH 35-7.5 mm according to EN 60715



TH 35-15 mm according to EN 60715



GS 32 mm according to EN 60715



C 20 mm according to EN 60715



C 30 mm according to EN 60715



**TSD 35****TSD 35**

## Mounting rail cutter



TH 35-7.5 mm according to EN 60715



TH 35-15 mm according to EN 60715

Hand-operated mounting rail cutter for cutting DIN mounting rails made of steel or copper.

- cutting with no burrs or waste
- Length stop is included in delivery
- Table-top unit for mounting on workbench or similar workplaces

**Technical data****Housing specification**

Width  
Depth  
Height  
Weight

**Note****Ordering data****Version****Note****TSD 35**

142 mm  
200 mm  
110 mm  
16000 g

Technical data without lever and length end stop

Type	Qty.	Order No.
TSD 35/7.5 /15	1	1318510000

A large selection of mounting rails can be found in our current Terminal Connectors Catalogue.



# Hydraulic hole puncher

The IP protection classes for housings, cable glands, heavy-duty connectors and Industrial Ethernet connectors can only be maintained under two conditions: the sheet metal must not be bent during the punching process and the size of the punched-out holes must correspond precisely with the specifications. The IE-KO-HAT hydraulic sheet metal hole puncher, together with its accessories, guarantees you the highest quality workmanship available. It ensures that the connector fits precisely with the punched-out holes so that you can fulfill the proper IP protection class requirements.



The hydraulic hole puncher punches out precise holes for accommodating metric and PG cable glands.



Automatic centre punching at the drill points when punching out holes for heavy-duty connectors.



Punching out holes for a variety of industrial Ethernet connectors.

The table below lists the round splitting stamps and their corresponding tension screws – for manual use and for use with the hydraulic screws, all tension bolts are with UNF (unified fine) thread.



Type	Descriptions	Dimension	Order No.	Tension screw Ø x l in mm	Order No.	Hydraulic screw (tension bolt) Ø in mm	Order No.
KOS M 16	Round splitting stamp for M16 cable glands	Ø 16.2 mm	9204880000	9.5 x 50	9205030000	19 x 9.5	9205000000
KOS M 20	Round splitting stamp for M20 cable glands	Ø 20.4 mm	9204950000				
KOS M 25	Round splitting stamp for M25 cable glands	Ø 25.4 mm	9204900000				
KOS M 32	Round splitting stamp for M32 cable glands	Ø 32.5 mm	9204910000	19.0 x 55	9205040000	19	9205010000
KOS M 40	Round splitting stamp for M40 cable glands	Ø 40.5 mm	9204920000				
KOS M 50	Round splitting stamp for M50 cable glands	Ø 50.5 mm	1548410000	19.0 x 75	9204780000	19	
KOS M 63	Round splitting stamp for M63 cable glands	Ø 63.5 mm	1548400000				
KOS PG 9	Round splitting stamp for PG9 cable glands	Ø 15.2 mm	9204930000				9205000000
KOS PG 11	Round splitting stamp for PG11 cable glands	Ø 18.6 mm	9204940000				
KOS PG 13	Round splitting stamp for PG13 cable glands	Ø 20.4 mm	9204950000	9.5 x 50	9205030000	19 x 9.5	
KOS PG 16	Round splitting stamp for PG16 cable glands	Ø 22.5 mm	9204960000				
KOS PG 21	Round splitting stamp for PG21 cable glands	Ø 28.3 mm	9204970000				
KOS PG 29	Round splitting stamp for PG29 cable glands	Ø 37.0 mm	9204980000	19.0 x 55	9205040000	19	9205010000
KOS PG 36	Round splitting stamp for PG36 cable glands	Ø 47.0 mm	9204990000	19.0 x 75	9204780000	19	

**Information:** Hydraulic screw included in the IE-KO-HAT set.  
Tension screws only used for manual operation.

## Hydraulic sheet holes

Incl. accessories:

- 1 HSS pre-drill Ø 10 mm
- 1 tension bolt Ø 19 mm
- 1 tension bolt Ø 19 x 9.5 mm
- 1 spacer nut set (3-part)
- 1 bridge
- Punching force 75 kN

## IE-KO-HAT



- Pressure relief valve protects against overloading
- Cylinder head angled at 90°
- Angled head can be rotated through 360°
- Ergonomic handle springs back automatically
- The waste piece no longer becomes jammed thanks to 3-fold splitter
- Hydraulic punch made of high-strength aluminium (approx. 40% weight saving)

## Technical data

### Steel-sheet (S235) punching performance tension bolt, max.

KOHS 9,5 + 19

KOHS 19

Square holes

Rectangular holes

### Tool data

Depth / Width / Height

Weight

Punching force

Max. operating pressure

Type hydraulic oil

### Note

## Ordering data

### Version

### IE-KO-HAT

2mm

3mm

3mm

2.5mm

70 / 290 / 120 mm

1.75 kg

75 kN

680 bar

HLP32

### Note

## Accessories

Tension bolt

Tension bolts

Pre-drill

### Type Qty. Order No.

IE-KO-HAT 1 1966810000



Tension bolt KOHS 19



Tension bolts KOHS 9.5+19



Pre-drill KOPD 10.0

**Custom stamp for Industrial Ethernet connections**

Note:

Type	Description	Dimensions	Qty.	Order No.
IE-KOK-V1	Custom shape for Bajonet O1 metal	Ø 27 mm x 1-side 25.9 mm	1	1966780000
IE-KOK-V4	Custom shape for Push Pull V04 plastic	Ø 23.2 mm x 2-sides 20.2 mm	1	1966790000
IE-KOK-V5	Custom shape for RockStar® V05 metal	22.0 x 22.0 mm	1	9204790000

\*contains stamp, tension bolt, counter nut, suitable for S235 up to 2 mm material thickness

**Rectangular splitting stamp for heavy-duty connectors**

Note:

Type	Description	Dimensions	Size	Qty.	Order No.
KOK 52 x 36	Splitting stamp for 6-pole heavy-duty connectors	52.0 x 36 mm	3	1	9204820000
KOK 65 x 36	Splitting stamp for 10-pole heavy-duty connectors	65.0 x 36 mm	4	1	9204830000
KOK 86 x 36	Splitting stamp for 16-pole heavy-duty connectors	86.0 x 36 mm	6	1	9204850000
KOK 91 x 36	Splitting stamp for 18-pole heavy-duty connectors	91.0 x 36 mm	1	1	9204860000
KOK 112 x 36	Splitting stamp for 24-pole heavy-duty connectors	112.0 x 36 mm	8	1	9204870000
KOK 52 x 91	Splitting stamp for FrontCom Vario	52.0 x 91 mm		1	2008410000

\*contains stamp, tension bolt, counter nut, suitable for S235 up to 2 mm material thickness

**Rectangular splitting stamp for switches**

Note:

Type	Description	Dimensions	Qty.	Order No.
KOK 46 x 46	Rectangular splitting stamp for switches	46.0 x 46.0 mm	1	9204810000
KOK 68 x 68	Rectangular splitting stamp for switches	68.0 x 68.0 mm	1	9204840000
KOK 92 X 92	Rectangular splitting stamp for switches	92.0 x 92.0 mm	1	2008420000

\*contains stamp, tension bolt, counter nut, suitable for S235 up to 3 mm material thickness

**Round splitting stamp for metric cable glands**

Note:

Type	Description	Dimensions	Material thickness	Qty.	Order No.
KOS M 16	Round splitting stamp for M16 cable glands	Ø 16.2 mm	2 mm	1	9204880000
KOS M 20	Round splitting stamp for M20 cable glands	Ø 20.4 mm	2 mm	1	9204950000
KOS M 25	Round splitting stamp for M25 cable glands	Ø 25.4 mm	2 mm	1	9204900000
KOS M 32	Round splitting stamp for M32 cable glands	Ø 32.5 mm	3 mm	1	9204910000
KOS M 40	Round splitting stamp for M40 cable glands	Ø 40.5 mm	3 mm	1	9204920000
KOS M 50	Round splitting stamp for M50 cable glands	Ø 50.5 mm	3 mm	1	1548410000
KOS M 63	Round splitting stamp for M63 cable glands	Ø 63.5 mm	3 mm	1	1548400000

\*contains stamp, tension bolt

**Round splitting stamp for high-strength cable glands**

Note:

Type	Description	Dimensions	Material thickness	Qty.	Order No.
KOS PG 9	Round splitting stamp for PG9 Cable glands	Ø 15.2 mm	2 mm	1	9204930000
KOS PG 11	Round splitting stamp for PG11 Cable glands	Ø 18.6 mm	2 mm	1	9204940000
KOS PG 13	Round splitting stamp for PG13 Cable glands	Ø 20.4 mm	2 mm	1	9204950000
KOS PG 16	Round splitting stamp for PG16 Cable glands	Ø 22.5 mm	2 mm	1	9204960000
KOS PG 21	Round splitting stamp for PG21 Cable glands	Ø 28.3 mm	2 mm	1	9204970000
KOS PG 42	Round splitting stamp for PG29 Cable glands	Ø 37.0 mm	3 mm	1	1548380000
KOS PG 48	Round splitting stamp for PG36 Cable glands	Ø 47.0 mm	3 mm	1	1548390000

\*contains stamp, tension bolt

**Tension screw**

Note:

Type	Description	Dimensions	Qty.	Order No.
KOBBS	Tension screw	9.5 x 50 mm	1	9205030000
KOBBS	Tension screw	19 x 55 mm	1	9205040000
KOBBS	Tension screw	19 x 75 mm	1	9204780000

Overview of the allocation of hydraulic screws on page B.13



**SLICER 1K**

Electrician's knife



- Lock-blade knife with plastic handle
- Rust-proof
- With round and triangular notch

**SLICER 2K**

Electrician's knife



- Lock-blade knife with plastic handle
- Electrician blade with 2 notches and lock
- Curved blade, part of which is finely serrated
- Rust-proof

**SCISSOR 2K**

Electrician's scissors



- With wire cutter
- Serrated cutting edge
- Rust-proof
- Soft-touch handle for firm grip

**Ordering data**

Type	Qty.	Order No.
SLICER 1K	1	9918160000

**Ordering data**

Type	Qty.	Order No.
SLICER 2K	1	9041600000

**Ordering data**

Type	Qty.	Order No.
SCISSOR 2 K	1	9918230000

**SCISSOR KEVLAR**

Cutting

**B**

- Cable shears specially designed for aramid fibres
- Only for cutting aramid fibres (strain relief in fibre-optic cables)
- Do not use for other materials
- Special blade geometry
- Blades ground
- With teeth on the cutting edge
- Riveted joint
- Hand-friendly, impact-resistant plastic handles

**Ordering data**

Type	Qty.	Order No.
SCISSORS KEVLAR	1	1208910000



# Stripping

## Stripping


Introduction	C.2
Stripping and cutting tools	C.4
Sheathing strippers	C.12

# Strip it – don't rip it

## Working with our tool, that's the new rule.

**Precise stripping tools that give you an instant grip on any insulation**

Combine speed with sensitivity. Our professional stripping tools make your work easier than ever before. No matter whether you want to process small or large conductor cross-sections: You will always achieve a perfect result. This is because our stripping tools are suitable for different insulations and conductor cross-sections – and because you will find exactly the tool that suits your requirements in our large range.

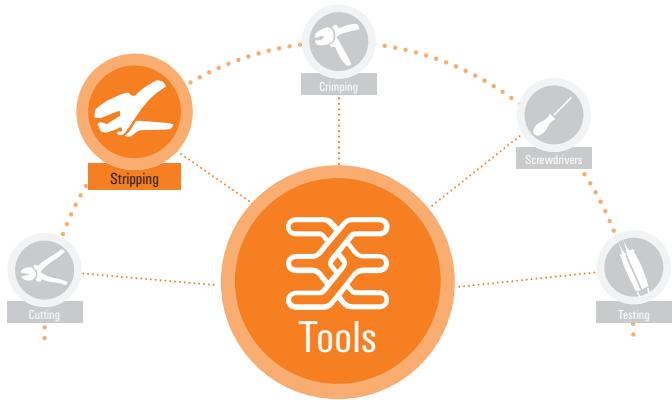

"Stripping" means the cutting and removal of the insulation. The following must be ensured in performing this task. The stripping dimension must be observed and neither the conductor nor the remaining insulation must be damaged. To avoid mistakes, use a stripping tool matched to the insulation and cross-section of the conductor.



Do not use work knives or penknives because the stripping quality when using such tools depends entirely on the manual dexterity of the user. The quality is not consistent, even when the user is highly skilled.

stripax® stripping tools guarantee a consistent stripping result which complies with DIN regulations. The tools are rated for standard dimension PVC insulation. Any PVC insulation thicknesses deviating from normal can be set manually. The conductor stopper and integrated wire cutter allow highly versatile use of the tools.

Special insulation types such as Teflon, Silicone and Kapton require special stripping tools. These tools strip the conductor with punch blades.

## Stripping

After cutting the conductor, it is prepared for crimping. First, a predetermined length of insulation is removed without damaging the conductor. The subsequent contact point or the wire end ferrule to be processed determines how much of the conductor insulation needs to be removed. Care must also be taken here to make sure that the cable is stripped to a high quality standard. Stripping errors that must be avoided are listed in DIN IEC 60352-2.

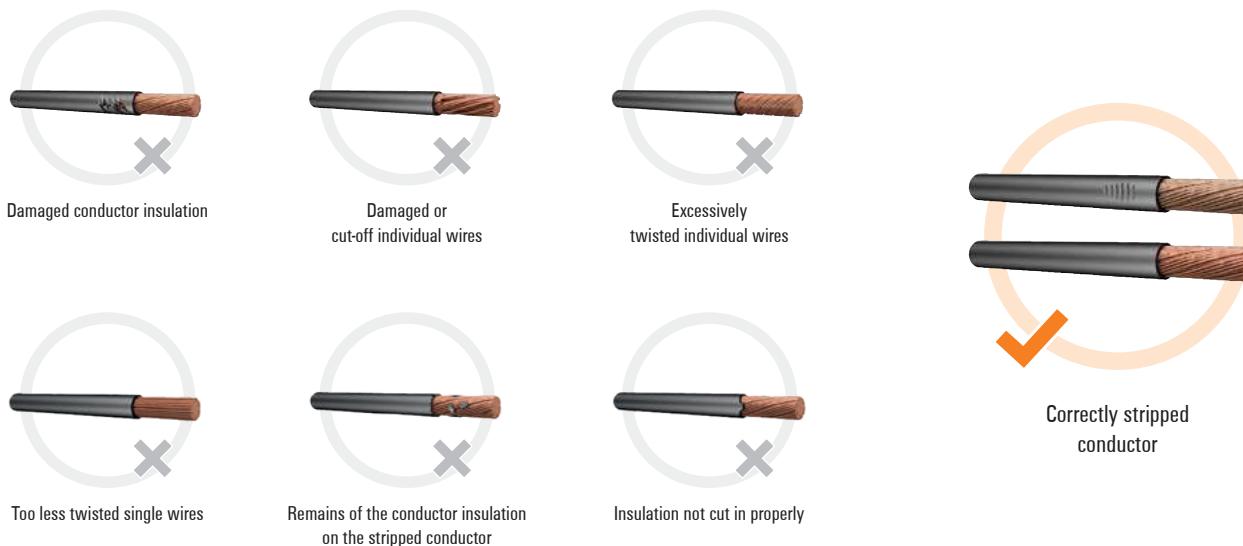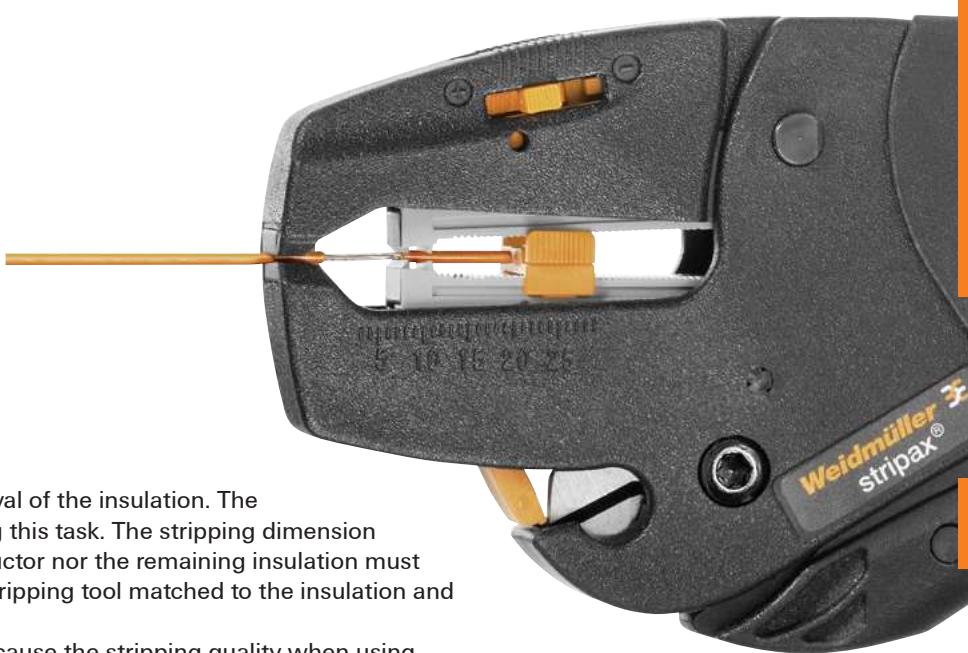

**Stripping and cutting tools**

- For flexible and solid conductors
- Double-insulated cables in two process steps without special adjustment
- Automatic opening of clamping jaws after stripping
- No play in self-adjusting cutting unit
- Long service life
- No splaying of individual conductors
- Optimised ergonomic design
- Stripping length adjustable via end stop
- Adjustable to diverse insulation thicknesses
- Removable handle shells
- Fold-out cutting protection
- Personalised marking with ESG device marker
- Selectable two-stage partial stripping

C

**stripax®**0.08...10 mm<sup>2</sup>**stripax® 16**6...16 mm<sup>2</sup>

- Stripping: PVC-insulated flexible and solid conductors from 0.08...10 mm<sup>2</sup> (~AWG 28...7)
- Cutting: PVC-insulated flexible and solid conductors up to 6 mm<sup>2</sup> (AWG 10)
- Processing of multi-conductors. Several thin flat ribbon cables can even be processed in one operation
- No damage to the conductors thanks to special, self-adjusting stripping blades



- Stripping: PVC-insulated flexible and solid conductors from 6...16 mm<sup>2</sup> (~AWG 10... 6)
- Cutting: PVC insulated flexible and solid conductors up to 6 mm<sup>2</sup> (AWG 10)
- No damage to the conductor thanks to specially shaped blade

**Technical data****Max. stripping performance**

Cable type  
Wire cross-section, min. / max.  
Stripping length, max.

**Cutting performance**

Conductor cross-section (cutting capacity)

**Tool data**

Width  
Height  
Weight

**Note****Ordering data****Version****STRIPAX**

Flexible and solid conductors with PVC insulation

0.08...10 mm<sup>2</sup>

25 mm

6 mm<sup>2</sup>

190 mm

99 mm

225 g

**STRIPAX 16**

Flexible and solid conductors with PVC insulation

6...16 mm<sup>2</sup>

25 mm

6 mm<sup>2</sup>

190 mm

99 mm

175 g

**Accessories**

Spare stripping blade  
Spare clamping jaw

**Note**

Type	Qty.	Order No.
STRIPAX	1	9005000000
STRIPAX ZERT	1	9017330000

Type	Qty.	Order No.
STRIPAX 16	1	9005610000
STRIPAX 16 ZERT	1	9918180000

Type	Qty.	Order No.
ERME 10 <sup>2</sup> SPX 4	1	1119030000
ERTE KLBC SPX 10	1	2571480000

Type	Qty.	Order No.
ERME 16 <sup>2</sup> SPX 4	1	1119040000
ERTE KLBC SPX 16	1	2571490000

## Stripping tools with automatic self-adjustment

- For flexible and solid conductors
- Ideally suitable for mechanical and plant engineering, railway and rail traffic, wind energy, robot technology, explosion protection as well as marine, offshore and ship building sectors
- Stripping length adjustable via end stop
- Automatic opening of clamping jaws after stripping
- No fanning-out of individual conductors
- Adjustable to diverse insulation thicknesses
- Double-insulated cables in two process steps without special adjustment
- No play in self-adjusting cutting unit
- Long service life
- Optimised ergonomic design
- Selectable two-stage partial stripping
- Removable handle shells
- Fold-out cutting protection
- Personalised marking with ESG device marker



### Technical data

#### Max. stripping performance

Cable type  
Wire cross-section, min. / max.

Stripping length, max.

#### Cutting performance

Conductor cross-section (cutting capacity)

#### Tool data

Width  
Height  
Weight

#### Note

### Ordering data

#### Version

## stripax® ULtimate

0.25...6 mm<sup>2</sup>



- Stripping: Isolated flexible and rigid cables from 0.25 to 6 mm<sup>2</sup> (~AWG 24 - 10)
- Cutting: PVC insulated flexible and solid conductors up to 6 mm<sup>2</sup> (AWG 10)
- Especially suitable for UL-specified conductors and halogen-free insulation materials

## stripax® ULtimate XL

2.5...10 mm<sup>2</sup>



- Stripping: Isolated flexible and rigid cables from 0.25 to 6 mm<sup>2</sup> (~AWG 24 - 10)
- Cutting: PVC insulated flexible and solid conductors up to 6 mm<sup>2</sup> (AWG 10)
- Especially suitable for UL-specified conductors and halogen-free insulation materials



#### STRIPAX ULTIMATE

Flexible and solid conductors with halogen-free insulation

0.25...6 mm<sup>2</sup>

25 mm

6 mm<sup>2</sup>

190 mm

99 mm

222 g

#### STRIPAX ULTIMATE XL

#### STRIPAX ULTIMATE XL

Flexible and solid conductors with halogen-free insulation

2.5...10 mm<sup>2</sup>

25 mm

6 mm<sup>2</sup>

190 mm

99 mm

220 g

Type	Qty.	Order No.
STRIPAX ULTIMATE	1	1468880000

Type	Qty.	Order No.
STRIPAX ULTIMATE XL	1	1512780000

#### Note

### Accessories

Spare stripping blade  
Spare clamping jaw

#### Note

Type	Qty.	Order No.
ERME SPX UL	1	1471390000
ERTE KLBC SPX UL	1	2571500000

Type	Qty.	Order No.
ERME SPX UL XL	1	1512790000
ERTE KLBC SPX UL XL	1	2571510000

**Stripping and cutting tool for conductors with special insulation Types for conductor diameters 0.2 ... 1.21 mm (~ AWG 32 ... 18)**

- Flexible and solid conductors with PVC, Teflon (PTFE) and silicone insulation
- Special stripping blades do not damage the conductor
- No splicing of the single conductors
- Blade inserts can be easily replaced
- All inserts fit one housing
- Guide bars in the blade cassettes facilitate correct positioning of the connector in the tool



#### Technical data

Max. stripping length  
Stripping diameter max. cutting performance mm

**Tool data**  
Height mm  
Width mm  
Weight g

#### Selection of blade sets

Conductor diameter mm (min./max.)	Colour blade set
AWG 28 ... 18	white 0,3-1,3
mm <sup>2</sup> ~ 0,08 ... 1,0	yellow 0,2-0,3

#### Information

#### Ordering data

##### Tools with blade set

#### Mini-duro-stripax®

##### Blade set



#### Mini-duro-stripax®

3-7  
2,2  
135  
82  
110

white	yellow	red	green	blue	black
0,3-1,3	0,2-0,3	0,3-0,5	0,55-0,8	0,88-0,92	1,0-1,21
28 ... 18	32/1, 32/7, 30/1, 30/7	28/1, 28/7, 28/19, 26/1, 26/7, 26/19,	24/7, 24/19, 22/1, 22/7, 22/19, 20/1	20/7, 20/19	18/1, 18/7, 18/19
~ 0,08 ... 1,0		24/1	PTFE	PTFE	PTFE
PVC / silicone	PTFE	PTFE	PTFE	PTFE	PTFE

#### Tool with all blade sets

#### Accessories

##### Blade set

**Order No.**  
**9001280000**

**Order No.**  
**9003500000**

**Order No.**  
**9006970000**

**Order No.**  
**9003600000**

**Order No.**  
**9003610000**

**Order No.**  
**9003620000**

**Order No.**  
**9003630000**

**Order No.**  
**9003640000**

#### Information

**Stripping and cutting tools**

- Quick and accurate stripping
- No need to adjust cutting depth
- No damage to inner conductor

**LWL-stripax®**

Stripping and cutting tool for plastic fibre-optic cables with 1 mm diameter inner conductor

- Stripping length adjustable via end stop
- Automatic opening of the clamping jaws after stripping

**Technical data****Max. stripping performance**

Cable type  
Wire cross-section, min. / max.  
Stripping length, max.

**Tool data**

Width  
Height  
Weight

**Note****Ordering data****Version****M-D-STRIPAX LWL**

POF conductor with an inner conductor of 1 mm

7.5 mm

82 mm

135 mm

110 g

POF: polymer optical fibre

**Accessories****Type****Qty.****Order No.**

M-D-STRIPAX LWL

1

**9003750000**

**Note****Type****Qty.****Order No.**

MEHA KP LWL M-D-SPX

1

**9003760000**

## multi-stripax®

C

Stripping is the name given to the cutting and removal of conductor insulation. When carrying out this task it must be guaranteed that the appropriate length of insulation is removed and that neither the conductor nor the remaining insulation are damaged in any way.

DIN IEC 352 part 2 (formerly DIN IEC 48/290) contains details of the stripping faults to avoid.

### The challenge



AWG lines

Fieldbus lines

Standardised  
conductorsSensor and  
actuator linesCables for  
Rail industryCables for the  
aerospace industry

Bus applications

Power supply and distribution

Sensors and actuators in the field



**multi-stripax®**

**Multifunctional stripping tool for use on a multitude of conductor insulation forms and configurations – even those not covered by the standard**

**multi-stripax® the troubleshooter**




- Interchangeable stripping units
- Proper stripping of any conductor round, flat or special profiles, thanks to the specially shaped stripping blades
- Incorporates cutting function for up to 2.5 mm<sup>2</sup> solid and 16 mm<sup>2</sup> fine
- Fatigue free operation thanks to ergonomic design
- No damage to conductor or remaining insulation
- Best stripping results for industrial applications
- Stripping results reproduced accurately time and time again
- A long lasting, reliable tool thanks to its robust design
- Plus, the customary Weidmüller repair service

**Special stripping units – the answer to diverse stripping tasks**


The multi-stripax® tool, distinguished by its robust design was developed, following customer feedback, to handle all the stripping tasks they have met with in practice.

Thanks to the interchangeable stripping units, a special solution can be found for every challenge in the marketplace.

The specially shaped stripping blades guarantee perfect stripping results. The guide plates ensure the correct positioning of the wire and therefore prevent damage to the remaining wire. The clamping jaws hold the conductor with just the right force during the stripping operation and are matched to the specific situation at hand. The flexibility of the multi-stripax® to affect the result of the stripping operations depending on the different variables it encounters makes it a universal troubleshooter.

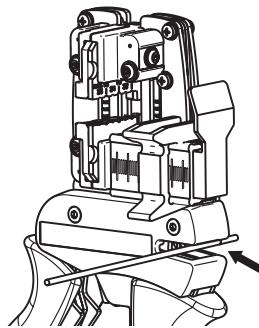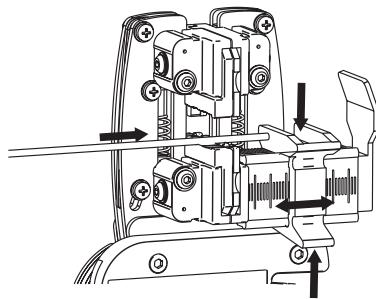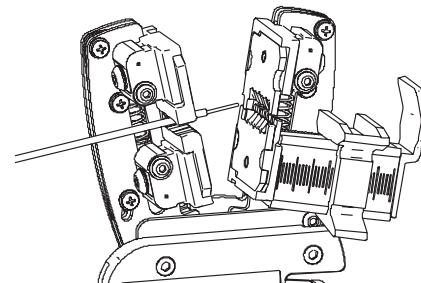**Cutting****Positioning****Stripping****multi-stripax®****Technical data**

Cable type	PVC, Teflon, PTE, PUR, silicone, halogen free
Conductor cross-section, min.	2 mm
Stripping length, max.	no limit (in several steps)
max. cutting capacity, fine-strand	16 mm <sup>2</sup>
max. cutting capacity, solid	2,5 mm <sup>2</sup>
max. cutting capacity, ribbon	10,2 x 4 mm
Depth/Width/Height	250 / 85 / 40 mm
Weight	250 g
<b>Note</b>	

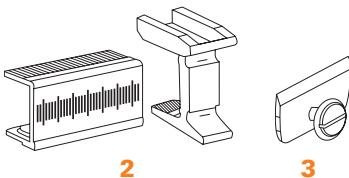**multi-stripax® incl. stripping unit****3**

- High quality stripping for industrial applications
- Specially shaped stripping blades enable stripping of special types of insulation and conductor configurations
- Adjustable stop for setting stripping lengths from 2.3 to 30 mm
- Highly flexible thanks to interchangeable stripping units
- Stripping results reproduced accurately time and time again
- No damage to the conductor or insulation
- A durable, reliable tool thanks to its robust design
- Integral cutting function for max. 2.5 mm<sup>2</sup> solid or 16 mm<sup>2</sup> flexible cables


**Ordering data**

Illustration	Type	Qty.	Order No.	Features
<b>1</b>	multi-stripax® 0,25 -1,5S	1	<b>9204540000</b>	Halogen free PVC, silicone, teflon and Radox 3GK-insulated cables; Cable cross section 0.25 up to 1.5 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type Cutting function up to 6 mm <sup>2</sup>
<b>1</b>	multi-stripax® 0,75 -4,0SL	1	<b>9203610000</b>	Halogen free PVC, silicone and teflon insulated cables; Cable cross section 0.75 up to 4 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type Cutting function up to 6 mm <sup>2</sup>
<b>1</b>	multi-stripax® 1,5 -6,0S	1	<b>9204560000</b>	Halogen free PVC, silicone, teflon and Radox 3GKW-insulated cables; Cable cross section 1.5 up to 6 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type Cutting function up to 6 mm <sup>2</sup>
<b>1</b>	multi-stripax® 16SL	1	<b>9202220000</b>	PVC insulated cables; Cable cross section 16 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type 1. station solid, stranded and flexible (restricted) 2. station double stranded Cutting function up to 6 mm <sup>2</sup>
<b>1</b>	multi-stripax® 6-16	1	<b>9202210000</b>	PVC insulated cables; Cable cross section 6 up to 16 mm <sup>2</sup> ; max. stripping lengths depends on cable design / cable type 1. station solid, stranded and flexible 6 mm <sup>2</sup> 2. station solid, stranded and flexible 10 mm <sup>2</sup> 3. station solid, stranded and flexible 16 mm <sup>2</sup> double stranded (flexible) Cutting function up to 6 mm <sup>2</sup>
<b>1</b>	multi-stripax® AWG	1	<b>9202230000</b>	AWG with PTFE and PVC insulated cables; Cable cross-section AWG 26..16 max. stripping lengths depends on cable design Cutting function up to 6mm <sup>2</sup> (AWG 16)
<b>1</b>	multi-stripax® ASI	1	<b>9202250000</b>	ASI Bus cables 2 x 1.5 mm <sup>2</sup> flexible for PTE, PUR and EPDM insulated cables Stripping of outer insulation and inner cable Cutting function up to 6 mm <sup>2</sup>
<b>1</b>	multi-stripax® GKW LW	1	<b>9205760000</b>	Railway cable Radox GKW LW; Cable cross section 1.0; 1.5 and 2.5 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type Cutting function up to 6 mm <sup>2</sup>
<b>1</b>	multi-stripax® PV	1	<b>1190490000</b>	Photovoltaics cable and comparable earth and short circuit proof cables; Cable cross section 4.0; 6.0 and 10 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type Cutting function up to 6 mm <sup>2</sup>
<b>1</b>	multi-stripax® POF	1	<b>1208880000</b>	Duplex Stripping tool for fast processing of POF fiber and cable according to IEC 60793-2 A4A fibre (1,000 µm/980 µm POF). Cutting function up to 6 mm <sup>2</sup>
<b>2</b>	ERAN multi-stripax®	1	<b>9203100000</b>	Length stop
<b>3</b>	ERME multi-stripax®	1	<b>9203070000</b>	Cutting knife

**Note**

## Stripping and cutting tool multi-stripax®

### Stripping unit consists of:

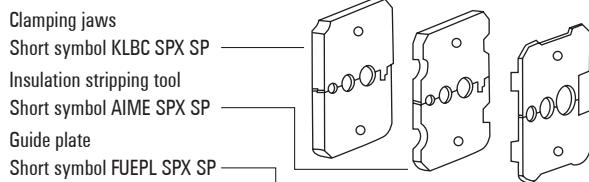

- Highly flexible thanks to interchangeable stripping units
- High quality stripping for industrial applications
- Specially shaped stripping blades enable stripping of special types of insulation and conductor configurations

### Ordering data

Type	Qty.	Order No.	Features
AIE multi-stripax® 0,25-1,5S	1	<b>9204550000</b>	Halogen free PVC, silicone, teflon and Radox 3GK-insulated cables; Cable cross section 0.25 up to 1.5 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type
AIE multi-stripax® 0,75-4,0SL	1	<b>9203730000</b>	Halogen free PVC, silicone and teflon insulated cables; Cable cross section 0.75 up to 4 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type
AIE multi-stripax® 1,5-6,0S	1	<b>9204570000</b>	Halogen free PVC, silicone, teflon and Radox 3GKW-insulated cables; Cable cross section 1.5 up to 6 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type
AIE multi-stripax® 16SL	1	<b>9202270000</b>	PVC insulated cables; Cable cross section 16 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type 1. station solid, stranded and flexible (restricted) 2. station double stranded
AIE multi-stripax® 6-16	1	<b>9202260000</b>	PVC insulated cables; Cable cross section 6 up to 16 mm <sup>2</sup> ; max. stripping lengths depends on cable design / cable type 1. station solid, stranded and flexible 6 mm <sup>2</sup> 2. station solid, stranded and flexible 10 mm <sup>2</sup> 3. station solid, stranded and flexible 16 mm <sup>2</sup> double stranded (flexible)
AIE multi-stripax® AWG	1	<b>9202280000</b>	AWG with PTFE and PVC-insulated cables; Cable cross section AWG 26...16 max. stripping lengths depends on cable design
AIE multi-stripax® ASI	1	<b>9202300000</b>	ASI Bus cables 2 x 1.5 mm <sup>2</sup> flexible for PTE, PUR and EPDM insulated cables Stripping of outer insulation and inner cable
AIE multi-stripax® GKW LW	1	<b>9205770000</b>	Railway cable Radox GKW LW; Cable cross section 1.0; 1.5 and 2.5 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type
AIE multi-stripax® PV	1	<b>1204280000</b>	Photovoltaics cable and comparable earth and short circuit proof cables; Cable cross section 4.0; 6.0 und 10 mm <sup>2</sup> max. stripping lengths depends on cable design / cable type
AIE multi-stripax® POF	1	<b>1212770000</b>	Duplex Stripping tool for fast processing of POF fiber and cable according to IEC 60793-2 A4A fibre (1,000 µm/980 µm POF).



**Sheathing strippers**

- Sheathing stripper for round cables
- Isolation stripping possible at any point of the cable
- Breaking open cut isolation by means of integrated cutter

C

**AM 25 / AM 35**

AM 25: Ø 6...25 mm; AM 35: Ø 25...35 mm


**AM 16**

For round cables, Ø 5...17 mm



- Pivoting blade for circumferential, longitudinal and spiral cuts
- Retaining bracket with integrated blade to break open an incision in the insulation
- Integrated spare blade

- Also highly suitable for stripping cables in the cable duct
- AM 16 guarantees precise cable routing
- Exact regulation of the cut depth with integrated visual display

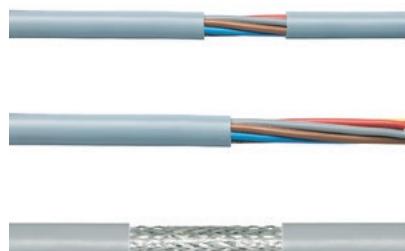**Technical data****Max. stripping performance**

Cable type  
Conductor diameter  
Cut depth

**Cutting performance**

UTP und STP data cables, max. diameter  
Copper cable - flexible, max.

**Tool data**

Width  
Height  
Weight

**Note****Ordering data****Version****AM 25**

PVC round cable  
6...25 mm  
adjustable up to 4.5 mm

**AM 35**

PVC round cable  
25...35 mm  
adjustable up to 4.5 mm

**AM 16**

Round cable  
5...17 mm  
0.8 - 2.5 mm

**Accessories****Note****Type**

Type	Qty.	Order No.
AM 25	1	9001540000
AM 35	1	9001080000

**Type**

Type	Qty.	Order No.
AM 16	1	9204190000

Type	Qty.	Order No.
ERSATZMESSER AM 25/35	2	9001530000
Sheathing stripper		

Type	Qty.	Order No.
ERME AM 16	1	9204260000
Sheathing stripper		

**Sheathing strippers**

- Sheathing strippers for insulated round cables
- Especially suitable for stripping cables with PVC, PUR, PE, TPE and halogen-free LSZH insulation
- Insulation can be stripped from any point along the cable

**AM 12**

For UTP and STP data cables



- Cutting of UTP and STP data cables and other flexible copper cables with a diameter of up to 4 mm<sup>2</sup> (~AWG11)
- Stripping of the outer insulation of UTP and STP data cables and other round cables with Ø approx. 0.5...12.5 mm
- No damage to the shielding or conductor due to adjustable stripping blade
- Length end stop for repeated cutting and stripping lengths

**AM-X**

- No limitation in terms of the wire cross-section
- Easy handling and fatigue-free working thanks to integrated ratchet mechanism
- 2-sided ground knife for double the service life

**Technical data****Max. stripping performance**

Cable type

AWG

Conductor diameter

Cut depth

**Cutting performance**

UTP und STP data cables, max. diameter

Copper cable - flexible, max.

**Tool data**

Width

Height

Weight

**Note****Ordering data****Version****AM 12**

UTP and STP data cables

0.5...12.5 mm

adjustable

8 mm

4 mm<sup>2</sup>

97 mm

46 mm

36 g

**AM-X**

PVC round cable, Round cable

25...999 mm

adjustable up to 4.5 mm

160 mm

55 mm

169 g

**Note**

Type	Qty.	Order No.
AM 12	1	9030060000

Type	Qty.	Order No.
AM-X	1	2625720000

**Sheathing strippers for coaxial cable**



- For coaxial cable and round (shielded) data cables from Ø 2.5...8 mm
- 1-, 2- and 3-level stripping in one step
- Fast changeover to other cable and connector types thanks to adjustable and interchangeable screw holder
- Colour-coded, interchangeable cassettes with specified stripping length for standard coaxial cable and connector: see table
- Setting block (included) permits quick pre-setting of cutting depths
- Blade cassettes usable on both sides

**CST / IE-CST**

Ø 2.5...8 mm



- RG 58 and RG 71
- RG 59 and RG 62
- Antenna cable
- Profibus cable
- Ethernet cable

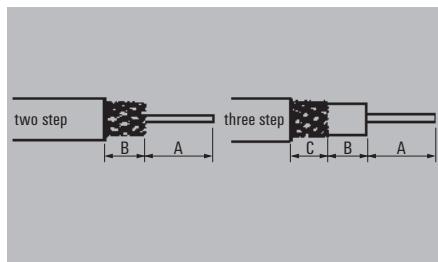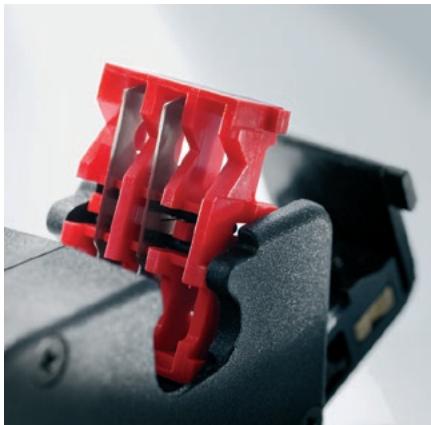**Cutter cassettes for CST****Technical data****Max. stripping performance**

Cable type  
Conductor diameter  
Stripping length, max.

**Tool data**

Width  
Height  
Weight

**Note****Ordering data****Version****Note****Accessories**

Screw holder  
Adjustment block

**Note****CST**

Coaxial data and round cables  
2.5...8 mm

**IE-CST**

Coaxial data and round cables  
2.5...8 mm

100 mm                    100 mm

45 mm                    42 mm

65 g                    85 g

**Type**

**Qty.**                    **Order No.**

CST                    1                    9030500000

IE-CST                    1                    9204350000

CST without blade cassette, cassette must be ordered separately. IE-CST including blade cartridge (9032020000), adjusted to Weidmüller Ethernet cable

**Type**

**Qty.**                    **Order No.**

SCHA CST                    1                    9032060000

EINSTELLBLOCK CST                    1                    9005800000

Colour cutter cassettes	B [mm]	C [mm]
grey	3.9	
red	6.0	
yellow	12.0	
blue	6.5	
white	8.6	
green	7.1	5.1
brown	7.5	3.5
orange	8.0	3.7
light green	6.0	6.0
black	8.6	2.3

Dim. A as stated by manufacturer (not defined by tool)

Colour cutter cassettes	Qty.	Order-No.
grey	1	9032050000
red	1	9032040000
yellow	1	9032030000
blue	1	9032020000
white	1	9204340000
green	1	9032000000
brown	1	9032010000
orange	1	9032200000
light green	1	9032210000
black	1	9032220000

**Sheathing strippers for coaxial cable**

- For coaxial cable and round (shielded) data cables from Ø 2.5...8 mm
- 1-, 2- and 3-level stripping in one step
- Adjustable stripping lengths in 1 mm steps for meshwork and dielectric materials (min. stripping length approx. 3.2 mm)
- Fast changeover to other cable types
- Max. stripping length 17 mm
- Incl. 3 blades

**CST VARIO**

Ø 2.5...8 mm



- RG 58 and RG 71
- RG 59 and RG 62
- Antenna cable
- Profibus cable
- Ethernet cable

**CST VARIO blade holder****Ordering data**

Type	Qty.	Order No.
CST VARIO BLADE HOLDER	1	9005740000

**CST VARIO blade insert****Ordering data**

Type	Qty.	Order No.
CST VARIO BLADE INSERT	1	9005730000

**Technical data****Max. stripping performance**

Cable type

Conductor diameter

Stripping length, max.

**Tool data**

Width

Height

Weight

**Note****Ordering data****Version****CST VARIO**

Coaxial data and round cables

2.5...8 mm

17 mm

116 mm

45 mm

76 g

Type	Qty.	Order No.
CST VARIO	1	9005700000

**Note****Accessories**

Type	Qty.	Order No.
SCHRAUBENDREHER CST	1	9005720000
MESSERHALTER CST VARIO	1	9005740000
MESSEREINSATZ CST VARIO	1	9005730000

**Note**

Includes spare blade set (1 set = 3 blades)

**Setting block CST****Ordering data**

Type	Qty.	Order No.
CST SETTING BLOCK	1	9005800000

**Screw holder CST****Ordering data**

Type	Qty.	Order No.
SCHA CST	1	9032060000

**Cable sheathing stripper**

- For fast and accurate stripping of moisture proof cables of diam. 8 - 13 mm, for example NYM cable, 3 x 1.5 mm<sup>2</sup> to 5 x 2.5 mm<sup>2</sup>
- No need to set cutting depth
- Ideal for working in junction and distribution boxes

**Stripper round**

Round cable stripper

**Stripper round top**

Round cable stripper with individual wire stripper



- Damp-proof cable Ø 8...13 mm

- Damp-proof cable Ø 8...13 mm
- With stripping device for individual wires of 0.2...4.0 mm<sup>2</sup>
- With integrated longitudinal cutter
- Retractable internal blade

**Technical data****Max. stripping performance**

Cable type  
Conductor diameter  
Wire cross-section, min. / max.

**Tool data**

Width  
Height  
Weight

**Note****Ordering data****Version****STRIPPER ROUND**

Flexible and solid conductors with PVC insulation  
8...13 mm

125 mm

35 mm

47 g

**STRIPPER ROUND TOP**

Flexible and solid conductors with PVC insulation  
8...13 mm

0.2...4 mm<sup>2</sup>

125 mm

35 mm

50 g

**Type**

Type	Qty.	Order No.
STRIPPER ROUND	1	9918040000

**Type**

Type	Qty.	Order No.
STRIPPER ROUND TOP	1	9918050000

**Cable knife**

- Simple, fast and accurate stripping of all conventional round cables from Ø 4 - 37 mm<sup>2</sup>
- Circumferential and longitudinal cuts with automatic rotary blade
- Knurled screw at end of handle for setting cutting depth
- Spring-loaded cable retaining clip with thumb guard
- Spare blade in handle

**Slicer NO 16**

Cable cutter Ø 4...16 mm



- Operating range: 4...16 mm outer diameter

**Slicer NO 27**

Cable cutter Ø 8...28 mm



- Operating range: 8...28 mm outer diameter

**Technical data****Max. stripping performance**Cable type  
Conductor diameter**Tool data**Width  
Height  
Weight**Note****Ordering data****Version****SLICER NO 16**

Flexible and solid conductors with PVC insulation

4...16 mm

132 mm  
29 mm  
75 g**SLICER NO 27**

Flexible and solid conductors with PVC insulation

8...28 mm

132 mm  
29 mm  
75 g**Accessories****Note**

Type	Qty.	Order No.
SLICER NO 16	1	9918070000

Type	Qty.	Order No.
SLICER NO 27	1	9918080000

Type	Qty.	Order No.
ZUB SLICER NO16-35	2	9201430000

Type	Qty.	Order No.
ZUB SLICER NO16-35	2	9201430000

**Special cable sheathing stripper**

Insulation stripping tool for data communication systems

**Stripper PC**

Special cable stripper

**Stripper Coax**

Special cable stripper



C

- Cable diameter Ø 5...15 mm
- For cables and conductors of 0.25...4.0 mm<sup>2</sup> (24 - 12 AWG)
- For data cables in the telecommunications and IT sectors
- IBM network cables
- Printer cables
- Control cables

- Cable diameter Ø 4.8...7.5 mm
- For PVC-insulated data communication and control cables
- RG 58 / RG 59
- TV antenna cables between Ø 4.8 and 7.5 mm
- PVC round cables 3 x 0.75 mm<sup>2</sup>

**Technical data****Max. stripping performance**

Cable type

Conductor diameter

Wire cross-section, min. / max.

**Tool data**

Width

Height

Weight

**Note****STRIPPER PC**

Data cable / telecommunications and IT

5...15 mm

0.25...4 mm<sup>2</sup>

125 mm

35 mm

55 g

**STRIPPER COAX**

Coaxial data and round cables

4.8...7.5 mm

97 mm

20.5 mm

22 g

**Ordering data****Version**

Type	Qty.	Order No.
STRIPPER PC	1	9918060000

Type	Qty.	Order No.
STRIPPER COAX	1	9918030000

**Note**

# Crimping

## Crimping


Introduction	D.2
Overview contacts – tools	D.6
Crimping tools for wire end ferrules	D.8
Introduction – Crimping tools for other contacts	D.16
Crimping tools for other contacts	D.18
Pressing tools	D.30
Introduction – Mechanical and electrohydraulic cutting and crimping tools	D.32
EPG Cut 40 battery-powered hydraulic cutting tool	D.33
Crimping tools PZ PK 6/70 and PZ RK 6/70	D.34
Crimping tools PZ PK 10/120 and PZ RK 10/120	D.35
Crimping tool EPG 45	D.36
Crimping tools EPG 60 and HPG 60	D.38
Crimping tools APG 80	D.40
Battery / Battery charger	D.42
Insertion tool for twisted-pair cable	D.43
Disconnect	D.44
Tools for polymer optical fibres	D.45
Cable tie tools	D.46
Operating aids for hand tools	D.48

# Crimp it – don't crush it

## Working with our tool, that's the new rule.

### Reliable crimping tools that let you connect wire-end ferrules and contacts in a flash





Make perfect crimping the rule. Because with every truly durable crimp connection, you make installations more reliable and safe. You also save an infinite amount of time during installation. That's provided you use Weidmüller's high-quality precision crimping tools. They enable you to quickly and easily make perfect crimp connections that last and comply with all international standards and regulations. And because every user is different, we provide you with a wide selection of ergonomic products. You are guaranteed to find the right tool in our diverse range of mechanical crimping tools.

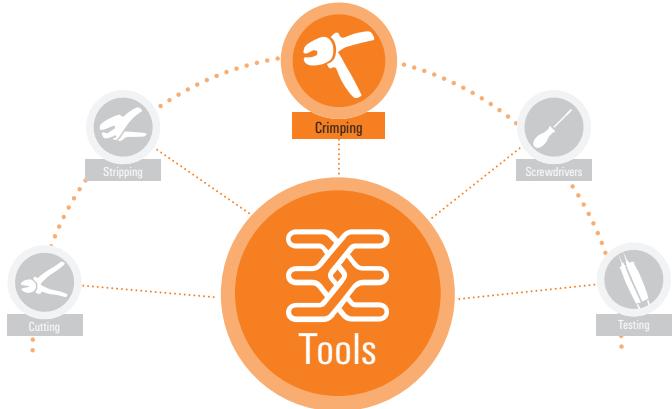

### **Advantages of crimp connections:**

- Efficient manufacture of connections on any production scale.
- Processing with fully or semi-automatic crimping machines or manual crimping tools.
- No cold solder joints.
- The spring characteristics of the spring contacts are not affected by soldering heat.
- Conductor flexibility behind the crimped connection is maintained.
- No burnt, discoloured or overheated conductor insulation.
- Good connections with reproducible electrical and mechanical values.
- Easy monitoring of production.

There is a wide range of press shapes available on the market for crimping wire end ferrules. It is not possible to specify in general which is the most suitable press shape. Each press shape offers individual advantages as well as disadvantages. These must be weighed up in relation to their subsequent application.


Crimping shape	pros and cons	
	<ul style="list-style-type: none"> <li>+ Low deformation under load in the contact point.</li> <li>+ Smooth continuous surface.</li> <li>- No neutral insertion direction.</li> </ul>	
	<ul style="list-style-type: none"> <li>+ Neutral position due to virtually circular cross-section.</li> <li>+ Ideal for circular connection compartments.</li> <li>- No smooth surface.</li> </ul>	
	<ul style="list-style-type: none"> <li>+ Maximum contact area.</li> <li>+ Ideal for square connection compartments.</li> <li>- No smooth surface.</li> </ul>	
	<ul style="list-style-type: none"> <li>+ Minimal deformation under load in the contact point.</li> <li>+ Smooth continuous surface.</li> <li>+ Press shape corresponds with EN 60947-1.</li> <li>- Position is not neutral.</li> </ul>	

# Area of application for wire end ferrules with plastic collars


## Technical information

Wire end ferrules are designed to protect the individual strands of a conductor. This prevents unwanted damage, kinking of individual strands or fraying of the entire conductor. The inside of the plastic collar on the wire end ferrule is cone-shaped to make it easier to insert the strands into the ferrule. It also prevents the angular conductor insulation edges from getting caught in the insertion funnel of the contact point.

D

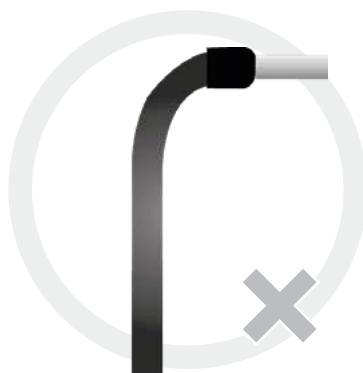

Risk of breakage due to overload

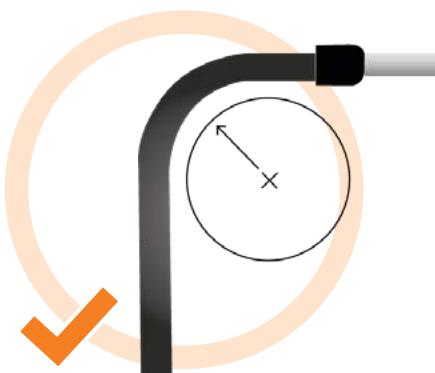

correct bending radius

What is important is that the plastic collar of the wire end ferrule does not offer any anti-kink protection, as is usually the case with insulated cable lugs for example. The plastic collar also does not provide any mechanical insulation support and must therefore not be subjected to excessive bending or tension. For this reason, the relevant standards must be observed during installation. According to DIN VDE 0298-300, cables may only be laid within a certain bending radius. For example, for PVC insulated cables with conductor diameters of  $\leq 20$  mm, this equates to six times the conductor diameter. In practice, this means that no significant tension may be applied to the AEH plastic collar.

## Standards and approvals



Weidmüller wire end ferrules



+ Weidmüller crimping tools




= Approval

## The crimping process

After stripping the insulation, a suitable contact or wire end ferrule can be crimped onto the end of the cable. Steps:

- Push the wire end ferrule onto the conductor as far as it will go.
- Conductor must protrude out of the ferrule, but no more than 1 mm.
- Place the tool directly behind the plastic collar.
- Crimp over the entire length of the sleeve. Do this in two steps if necessary.

D

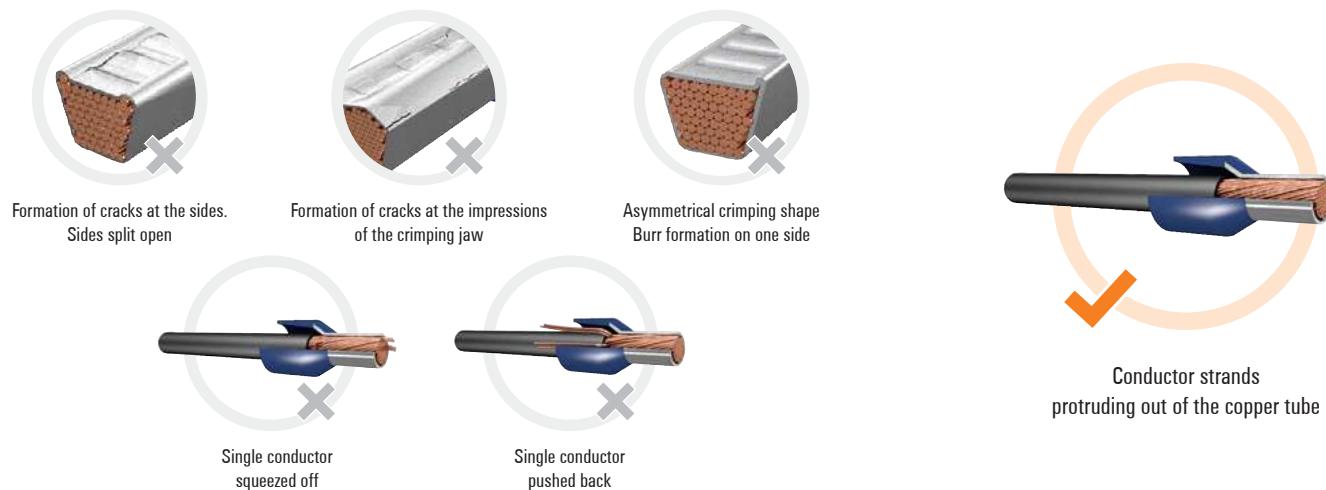

### **Further error patterns that must be avoided during crimping:**

- Sleeve not filled by conductor.
- Plastic collar damaged by crimping jaw.
- Conductor insulation is not pushed into the plastic collar.
- Wire end ferrule is bent in longitudinal direction after crimping.

Crimp contact	Crimp type	Description	Conductor crosssection in mm <sup>2</sup>	AWG	Crimping tool	Order No. tool	page
D  Crimping		with plastic collar	0,5...2,5	20...14	Stripax Plus 2.5	9020000000	E.8
		with / without plastic collar	0,14...6	26...10	PZ 6 roto	9014350000	E.11
			0,14...2,5	24...14	PZ 2.5	2903690000	E.9
			0,5...4	20...12	PZ 4	9012500000	E.12
		with / without plastic collar	0,25...6	24...8	PZ 10 HEX	1445070000	E.13
		with / without plastic collar	0,25...6	24...10	PZ 6/5	9011460000	E.12
		with / without plastic collar	0,5...6	20...10	PZ 3	0567300000	E.9
			26...8		PZ 10 SQR	1445080000	E.13
		with / without plastic collar	6...16	10...6	PZ 16	9012600000	E.14
			25...50	3...1	PZ 50	9006450000	E.15
Twin wire end ferrules		Twin wire end ferrules	0,5...1	20...17	PZ 1.5	9005990000	E.9
			0,5...4	20...10	PZ 10 HEX	1445070000	E.13
			0,5...2,5	20...14	PZ 4	9012500000	E.12
			0,5...4	20...12	PZ 6/5	9011460000	E.12
			0,5...4	20...12	PZ 3	0567300000	E.9
			0,5...4	20...12	PZ 6 roto	9014350000	E.11
			6...16	10...6	PZ ZH 16	9013600000	E.14
Stamped contacts		Weidmüller DFF series	0,22...2,5	24...12	HTF DFF	9014140000	E.29
		Weidmüller ZRV and MKF series	0,2...0,35 / 0,5...1	24...22 / 20...17	HTF ZRV	9014840000	E.29
		Weidmüller FEKO ZRV series	0,2...2,5	24...12	HTF AFK 2.5	9201040000	E.29
		Weidmüller RSV and DSTV-HD Systems	0,14...1,5	26...16	HTF RSV 16	9013560000	E.29
			2,5	14...12	HTF RSV 12	9013550000	E.29
Turned contacts		Turned HD and HE contacts	4...10	12...7	CTX CM 3,6	9018480000	E.22
			0,14...4	26...12	CTX CM 1,6/2,5	9018490000	E.22
		Turned HD, HE and HX contacts	0,14...6	26...10	CTIN CM 1,6/2,5	9205430000	E.22
			1,5...10	16...7	CTIN CM 3,6	9205440000	E.22

Crimp contact	Crimp type	Description	Conductor crosssection in mm <sup>2</sup>	AWG	Crimping tool	Order No. tool	page			
coaxial connectors		coaxial connectors			HTG 58/59	9012020000	E.27			
					HTG 174	9012410000	E.27			
					HTX 138	9012400000	E.27			
					HTX 188	9011990000	E.27			
insulated / non-insulated connectors		insulated connectors	0,5...2,5	20...14	HTI 15	9014400000	E.20			
					CTI 6	9006120000	E.19			
					CTI 6 G	9202850000	E.19			
		non-insulated connectors	0,5...6	20...10	HTN 21	9014610000	E.20			
					HTN 21 with end stop	9014100000	E.20			
					CTN 25 D4	9006220000	E.21			
					CTN 25 D5	9006230000	E.21			
modular plug connectors		WE-plug (4, 6 and 8-poles)	0,08...0,25	28...24	TT 864 RS WE	9008120000	E.31			
		WE-plug (4, 6 and 10-poles)	0,08...0,25	28...24	TT 1064 RS WE	9008190000	E.31			
		shielded WE-plug, system Hirose	0,08...0,25	28...24	TT8 RS MP8	9202800000	E.30			
Other contacts and plugs		SUB-D contacts	0,08...0,5	28...20	HTF SUB-D	9013260000	E.28			
		flat blade connectors and receptacles	0,1...1 (connec. width 2,8) 0,5...2,5 (connec. width 4,8) 0,5...2,5 (connec. width 6,3) 0,5...6 (connec. width 6,3)	27...17 20...14 20...14 20...10	HTF 28	9013090000	E.18			
					HTF 48	9013080000	E.18			
					HTF 63	9013400000	E.18			
		fibre optic connectors	Station 1 (hexagon crimp): 3,15 / 6,0 H.- → 3,9 Station 2 (round crimp): 4,85 / 6,0 H.- → 5,5		HTX LWL	9011360000	E.23			
					CTF 63	9202860000	E.18			
										
	IP 67 connector			IE-CT-SC-GOF	9205320000	E.24				
				IE-CT-LC-GOF	9205330000	E.24				
				IE-CT-SC-POF	9205340000	E.24				
				IE-CT-SC-GOF-P	9205350000	E.24				

**Crimping tools for wire end ferrules**

- 3 functions: cutting, stripping, crimping
  - Wire-end ferrules with plastic collars, in compliance with DIN 46228 Part 4 (dimensions and tolerances)
  - Universal crimp die - no adjustment when changing cross-sections
  - Ratchet for precise crimping
  - Efficient operation: laborious change of tools not necessary, resulting in significant time savings
  - Automatic conveyance of wire-end ferrules
  - Easy handling of ferrule strips
- Only strips of linked wire-end ferrules, each containing 50 pieces, from Weidmüller may be processed. The use of wire-end ferrules on reels may lead to destruction.

**stripax® plus 2.5**0.5...2.5 mm<sup>2</sup>**Cutting****Stripping**

- ~AWG 20...14
- Processing of strips from linked wire-end ferrules of 0.5...2.5 mm<sup>2</sup> from Weidmüller

**Crimping****Technical data****Description of contact**

Type of contact

Crimping range

**Tool data**

Width

Weight

**Note****stripax® plus 2.5**

Strips of linked wire-end ferrules

0.5...2.5 mm<sup>2</sup>

210 mm

260 g

Only strip-type products from Weidmüller may be processed.  
The use of wire-end ferrules on reels may lead to destruction.**Ordering data****Version**

Type	Qty.	Order No.
STRIPAX PLUS 2.5	1	9020000000
STRIPAX PLUS 2.5 ZERT	1	2917170000

Additional accessories can be found in Chapter J

**Accessories****Note**

Type	Qty.	Order No.
ERSATZMESSER STRIPAX PL	5	9050340000
ERTE AIME SPX P II	1	2917160000

### Crimping tools for wire end ferrules

- For wire-end ferrules with and without plastic collars, according to DIN 46228 Part 1 and Part 4 (dimensions and tolerances)
- Ratchet for precise crimping
- Release option in the event of incorrect operation

### PZ 2.5

0.14...2.5 mm<sup>2</sup>

- ~AWG 26...16
- Only one die for the whole cross-section range

### PZ 3

0.5...6 mm<sup>2</sup>

- ~AWG 21...10
- Only one die for the whole cross-section range
- Wire-end ferrule insertion from the front



### Technical data

#### Description of contact

- Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Crimping range 4 (with multiple crimping positions)  
Crimping range 5 (with multiple crimping positions)

#### Tool data

- Width  
Weight

#### Note

### Ordering data

#### Version

Certified tool

#### Note

#### PZ 2.5 S

Wire-end ferrules with/without plastic collars

0.14...2.5 mm<sup>2</sup>

160 mm

300 g

#### Type

PZ 2.5 S

#### Qty.

1

#### Order No.

2903690000

#### PZ 3

Wire-end ferrules with/without plastic collars

0.5...6 mm<sup>2</sup>

200 mm

426 g

#### Type

PZ 3

#### Qty.

1

#### Order No.

0567300000

PZ 3 ZERT

1

9017360000

Additional accessories can be found in Chapter J

**Crimping tools for wire end ferrules**

- Adjustable handle width for optimum ergonomics and fatigue-free working
- For wire-end ferrules with and without plastic collars, according to DIN 46228 Part 1 and Part 4 (dimensions and tolerances)
- Rotating crimp insert, lockable
- Insert the wire-end ferrules from the side or front
- Ratchet for precise crimping
- Release option if misused

**PZ 6 ROTO ADJ**

- ~AWG 26...10
- Only one die for the whole cross-section range
- Rotating die enables wire-end ferrule insertion from the front or side
- Reduction of the grip width by 20 % possible, for a cross-section range up to 2.5 mm<sup>2</sup>

**Technical data****Description of contact**

Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Crimping range 4 (with multiple crimping positions)  
Crimping range 5 (with multiple crimping positions)

**Tool data**

Width  
Weight

**Note****Ordering data****Version**

Certified tool

**Note****Wire-end ferrules with/without plastic collars**0.14...6 mm<sup>2</sup>

200 mm

Type	Qty.	Order No.
PZ 6 ROTO ADJ	1	2831380000
PZ 6 ROTO ADJ ZERT	1	2831390000

### Crimping tools for wire end ferrules

- For wire-end ferrules with and without plastic collars, according to DIN 46228 Part 1 and Part 4 (dimensions and tolerances)
- Rotating crimp insert, lockable
- Insert the wire-end ferrules from the side or front
- Ratchet for precise crimping
- Release option if misused

### PZ 6 Roto L

0.14...6 mm<sup>2</sup>

- ~AWG 26...10
- Only one crimp insert for the whole cross-section range
- A rotating crimp insert allows for wire-end ferrules to be inserted from the side or front
- Lockable die

### PZ 6 Roto

0.14...6 mm<sup>2</sup>

- ~AWG 26...10
- Only one die for the whole cross-section range
- Rotating die enables wire-end ferrule insertion from the front or side



### Technical data

#### Description of contact

- Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Crimping range 4 (with multiple crimping positions)  
Crimping range 5 (with multiple crimping positions)

#### Tool data

- Width  
Weight

#### Note

### Ordering data

#### Version

Certified tool

#### Note

#### PZ 6 roto L

Wire-end ferrules with/without plastic collars

0.14...6 mm<sup>2</sup>200 mm  
428 g

Type	Qty.	Order No.
PZ 6 ROTO L	1	1444050000
PZ 6 ROTO L ZERT	1	1527230000

Additional accessories can be found in Chapter J

#### PZ 6 roto

Wire-end ferrules with/without plastic collars

0.14...6 mm<sup>2</sup>200 mm  
428 g

Type	Qty.	Order No.
PZ 6 ROTO	1	9014350000
PZ 6 ROTO ZERT	1	9017440000

Additional accessories can be found in Chapter J

**Crimping tools for wire end ferrules**

- For wire-end ferrules with and without plastic collars, according to DIN 46228 Part 1 and Part 4 (dimensions and tolerances)
- Ratchet for precise crimping
- Release option in the event of incorrect operation

**PZ 4**0.5...4 mm<sup>2</sup>

- ~AWG 21...12
- Only one crimping station for the whole cross-section range
- Wire-end ferrule insertion from the side

**PZ 6/5**0.25...6 mm<sup>2</sup>

- ~AWG 24...10
- Crimp complies with Euro-Norm EN 60947-1
- Approval according to VG 95 236 T 14 B 002
- Five crimping stations corresponding to the conductor cross-sections
- Wire-end ferrule insertion from the side

**Technical data****Description of contact**

Type of contact  
 Crimping range  
 Crimping range 1 (with multiple crimping positions)  
 Crimping range 2 (with multiple crimping positions)  
 Crimping range 3 (with multiple crimping positions)  
 Crimping range 4 (with multiple crimping positions)  
 Crimping range 5 (with multiple crimping positions)

**Tool data**

Width  
 Weight

**Note****Ordering data****Version**

Certified tool

**Note****PZ 4**

Wire-end ferrules with/without plastic collars

0.5...4 mm<sup>2</sup>

200 mm

448 g

**Type**

Qty. Order No.

PZ 4 1 9012500000

PZ 4 ZERT 1 9017300000

Additional accessories can be found in Chapter J

**PZ 6/5**

Wire-end ferrules with/without plastic collars

0.25...6 mm<sup>2</sup>0.25 mm<sup>2</sup>...0.5 mm<sup>2</sup>0.75 mm<sup>2</sup>...1.5 mm<sup>2</sup>2.5 mm<sup>2</sup>4 mm<sup>2</sup>6 mm<sup>2</sup>

200 mm

423 g

**Type**

Qty. Order No.

PZ 6/5 1 9011460000

PZ 6/5 ZERT 1 9017900000

Additional accessories can be found in Chapter J

### Crimping tools for wire end ferrules

- For wire-end ferrules with and without plastic collars, according to DIN 46228 Part 1 and Part 4 (dimensions and tolerances)
- Ratchet for precise crimping
- Release option in the event of incorrect operation
- Ergonomic handle design

### PZ 10 HEX

0.25 ... 10 mm<sup>2</sup>

- ~AWG 24 ... 8
- Only one die for the whole cross-section range of 0.25 ... 10 mm<sup>2</sup>
- Side wire-end ferrule insertion with hexagon crimp shape

### PZ 10 SQR

0.14 ... 10 mm<sup>2</sup>

- ~AWG 26 ... 8
- Only one die for the whole cross-section range of 0.14 ... 10 mm<sup>2</sup>
- Side wire-end ferrule insertion with square crimp shape



### Technical data

#### Description of contact

- Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Crimping range 4 (with multiple crimping positions)  
Crimping range 5 (with multiple crimping positions)

#### Tool data

- Width  
Weight

#### Note

### Ordering data

#### Version

Certified tool

#### Note

#### Wire-end ferrules with/without plastic collars

0.25...10 mm<sup>2</sup>

#### Wire-end ferrules with/without plastic collars

0.14...10 mm<sup>2</sup>

#### Type

#### Qty.

#### Order No.

PZ 10 HEX 1 1445070000

PZ 10 HEX ZERT 1 1989320000

Additional accessories can be found in Chapter J

#### Type

#### Qty.

#### Order No.

PZ 10 SQR 1 1445080000

PZ 10 SQR ZERT 1 1989310000

Additional accessories can be found in Chapter J

**Crimping tools for wire end ferrules**

- For wire-end ferrules with and without plastic collars, according to DIN 46228 Part 1 and Part 4 (dimensions and tolerances)
- Ratchet for precise crimping
- Release option in the event of incorrect operation

**PZ 16**6...16 mm<sup>2</sup>

- ~AWG 10...6
- Crimp complies with Euro-Norm EN 60947-1
- Approval according to VG 95211 (military designation VG 95 236 T 14 B 002)
- Three crimping stations corresponding to the conductor cross-sections
- Wire-end ferrule insertion from the side

**PZ ZH 16**Twin wire-end ferrules from 6...16 mm<sup>2</sup>

- ~ AWG 10...6
- Three crimping stations corresponding to the conductor cross-sections
- Wire-end ferrule insertion from the side

**Technical data****Description of contact**

- Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Crimping range 4 (with multiple crimping positions)  
Crimping range 5 (with multiple crimping positions)

**Tool data**

- Width  
Weight

**Note****Ordering data****Version**

Certified tool

**Note****PZ 16**

Wire-end ferrules with/without plastic collars

- 6...16 mm<sup>2</sup>  
6 mm<sup>2</sup>  
10 mm<sup>2</sup>  
16 mm<sup>2</sup>

- 200 mm  
418 g

**Type**

Type	Qty.	Order No.
PZ 16	1	9012600000
PZ 16 ZERT	1	9017340000

Additional accessories can be found in Chapter J

**PZ ZH 16**

Twin wire-end ferrules

- 6...16 mm<sup>2</sup>  
6 mm<sup>2</sup>  
10 mm<sup>2</sup>  
16 mm<sup>2</sup>

- 250 mm  
730 g

**Type**

Type	Qty.	Order No.
PZ ZH 16	1	9013600000
PZ ZH 16 ZERT	1	9013610000

Additional accessories can be found in Chapter J

## Crimping tools for wire end ferrules

- For wire-end ferrules with and without plastic collars, according to DIN 46228 Part 1 and Part 4 (dimensions and tolerances)
- Ratchet for precise crimping
- Release option in the event of incorrect operation

### PZ 50

25...50 mm<sup>2</sup>

- ~AWG 4...0
- Crimp complies with Euro-Norm EN 60947-1
- Approval according to VG 95211 (military designation VG 95 236 T 14 B 002)
- Three crimping stations corresponding to the conductor cross-sections
- Wire-end ferrule insertion from the side



## Technical data

### Description of contact

- Type of contact:  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Crimping range 4 (with multiple crimping positions)  
Crimping range 5 (with multiple crimping positions)

### Tool data

- Width  
Weight

### Note

## Ordering data

### Version

Certified tool

### PZ 50

Wire-end ferrules with/without plastic collars

- 25...50 mm<sup>2</sup>  
25 mm<sup>2</sup>  
35 mm<sup>2</sup>  
50 mm<sup>2</sup>

- 250 mm  
730 g

Type	Qty.	Order No.
PZ 50	1	9006450000
PZ 50 ZERT	1	9017400000


### Note

Additional accessories can be found in Chapter J

## Crimping tools for other contacts

The crimping technique is one of the most reliable and most versatile connection methods. Extreme quality demands for a variety of different connections require that you use a wide variety of specialised crimping tools which are designed for specific contacts.

Weidmüller offers the right crimping tool for a wide variety of contact, regardless of whether you are using terminal contacts, cable-lug connectors, insulated connectors or coaxial connectors.

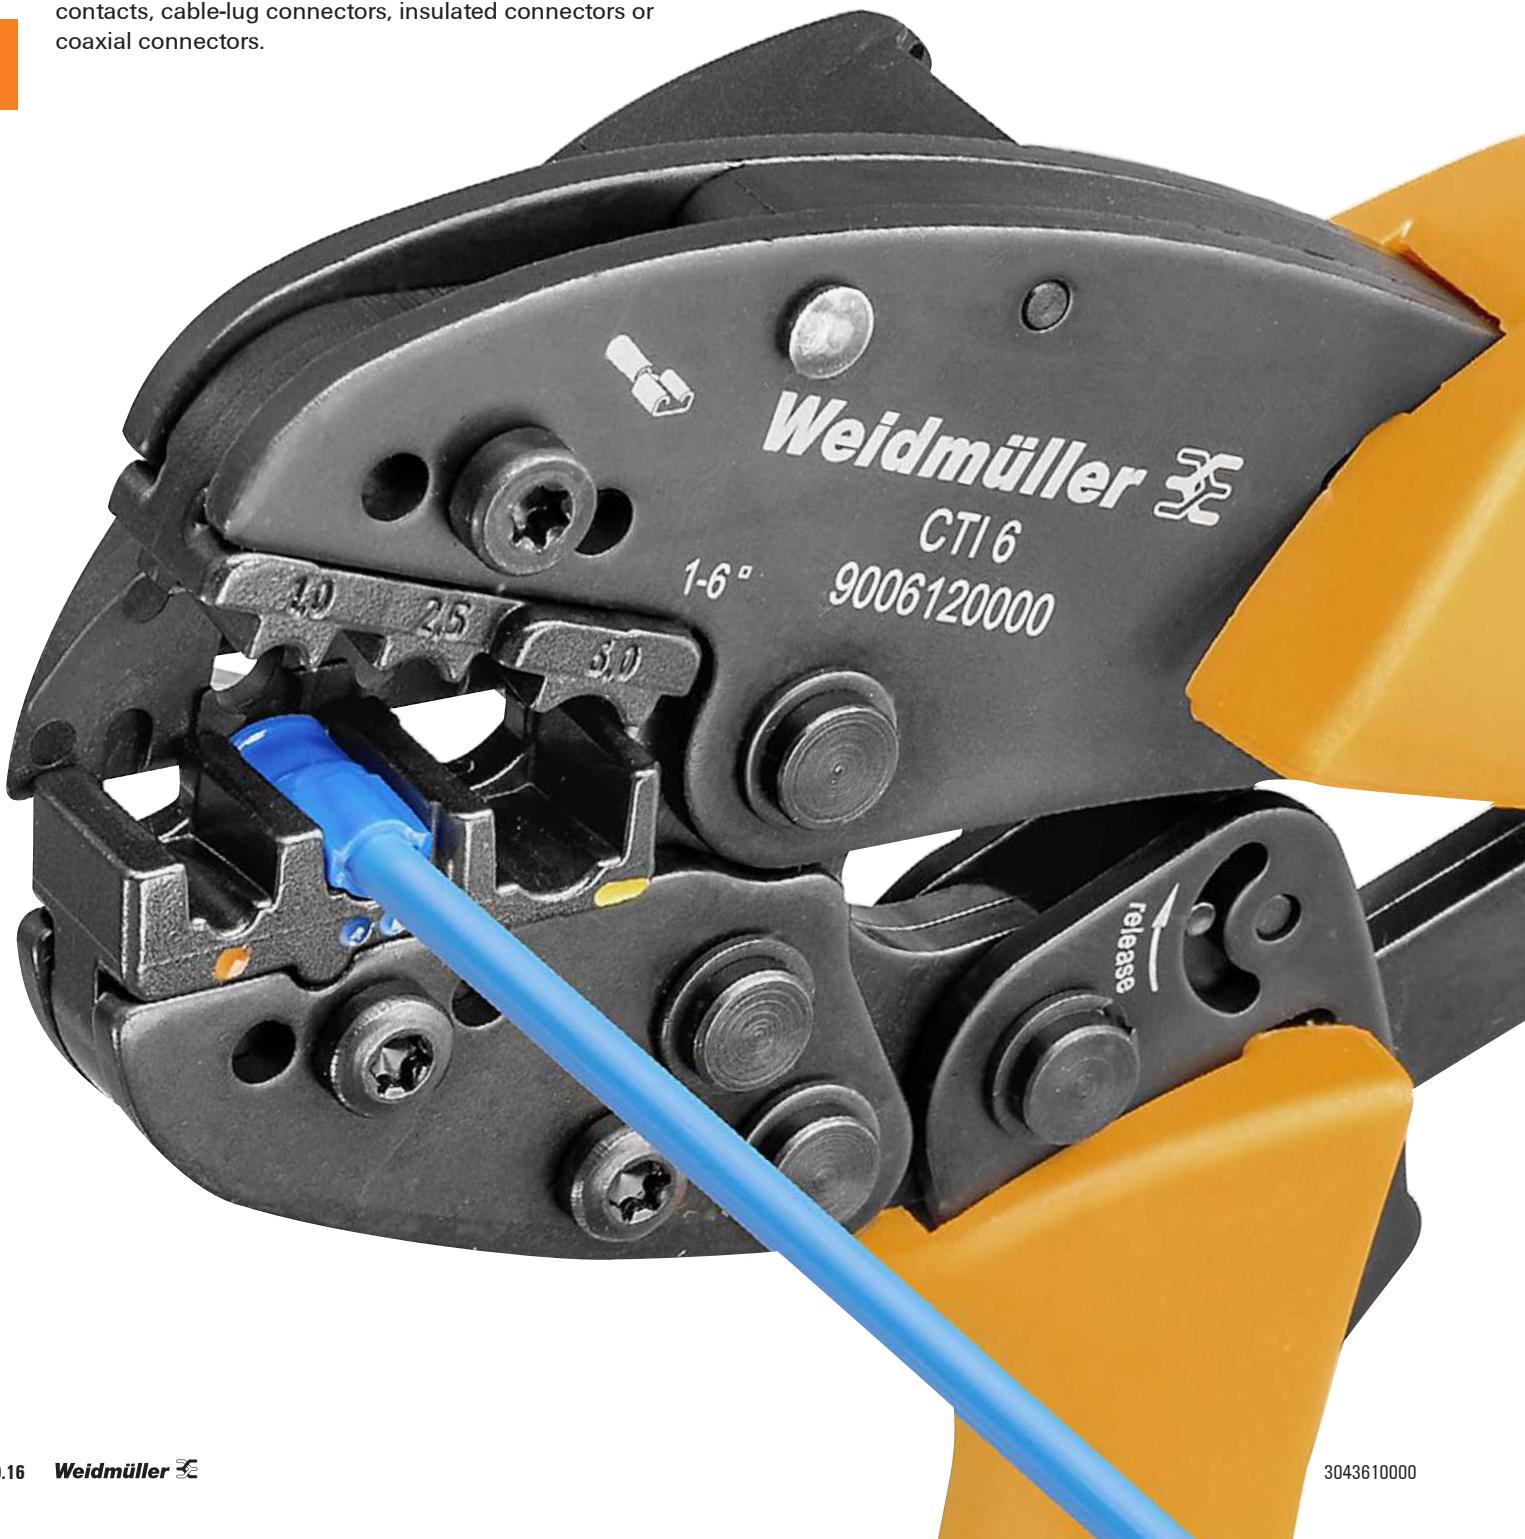



**Crimping tools for other contacts**

- Ratchet for precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts
- Contact and insulation are crimped in one step

**D****HTF 28 / HTF 48 / HTF 63**0.1...2.5 mm<sup>2</sup>

For flat-blade connectors and flat-blade receptacles with pre-rolled crimp claw

**HTF 28**

- ~AWG 28...18
- Plug width 2.8 mm, from 0.1...1.0 mm<sup>2</sup>

**HTF 48**

- ~AWG 21...14
- Plug width 4.8 mm, from 0.5...2.5 mm<sup>2</sup>

**HTF 63**

- ~AWG 21...14
- Plug width 6.3 mm, from 0.5...2.5 mm<sup>2</sup>

**CTF 63**0.5...6 mm<sup>2</sup>

For flat-blade connectors and flat-blade receptacles with pre-rolled crimp claw

**CTF 63**

- ~AWG 21...10
- Plug width 6.3 mm, from 0.5...6 mm<sup>2</sup>

**Technical data****Description of contact**

- Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Plug width

**Tool data**

- Width  
Weight

**Note****Ordering data****Version****HTF 28      HTF 48      HTF 63**

F-plug / -sleeve	F-plug / -sleeve	F-plug / -sleeve
0.1...1 mm <sup>2</sup>	0.5...2.5 mm <sup>2</sup>	0.5...2.5 mm <sup>2</sup>
0.1...0.25 mm <sup>2</sup>	0.5...1 mm <sup>2</sup>	0.5...1 mm <sup>2</sup>
0.25...0.5 mm <sup>2</sup>	1.5...2.5 mm <sup>2</sup>	1.5...2.5 mm <sup>2</sup>
0.6...1 mm <sup>2</sup>		
2.8 mm	4.8 mm	6.3 mm

**CTF 63**

F-plug / -sleeve
0.5...6 mm <sup>2</sup>
0.5...1 mm <sup>2</sup>
1.5...2.5 mm <sup>2</sup>
2.6...6 mm <sup>2</sup>
6.3 mm

250 mm
730 g

Type	Qty.	Order No.
HTF 28	1	9013090000
HTF 28 ZERT	1	9017410000
HTF 48	1	9013080000
HTF 48 ZERT	1	9017260000
HTF 63	1	9013400000
HTF 63 ZERT	1	9017240000

Type	Qty.	Order No.
CTF 63	1	9202860000
CTF 63 ZERT	1	1077010000

**Note**

Additional accessories can be found in Chapter J

Additional accessories can be found in Chapter J

**Crimping tools for other contacts****contacts**

- Ratchet for precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts

**CTI 6 G**0,5...6 mm<sup>2</sup>

For PVC-, PC- and polyamide-insulated connectors

- ~AWG 21...10
- Parallel crimp profile for crimping contact and insulation in one step

**CTI 6**0,5...6 mm<sup>2</sup>

For PVC-, PC- and polyamide-insulated connectors

- ~AWG 21...10
- Double-crimp profile, for crimping contact and insulation in one step

**Technical data****Description of contact**

- Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Plug width

**Tool data**

- Width  
Weight

**Note****Ordering data****Version****CTI 6 G**

- Insulated connector  
0.5...6 mm<sup>2</sup>  
Red = 0.5...1.5mm<sup>2</sup>  
Blue = 1.5...2.5mm<sup>2</sup>  
Yellow = 4...6mm<sup>2</sup>

250 mm

747 g

**CTI 6**

- Insulated connector  
0.5...6 mm<sup>2</sup>  
Red = 0.5...1.5mm<sup>2</sup>  
Blue = 1.5...2.5mm<sup>2</sup>  
Yellow = 4...6mm<sup>2</sup>

250 mm

730 g

**Note**

Type	Qty.	Order No.
CTI 6 G	1	9202850000
CTI 6 G ZERT	1	1292880000

Additional accessories can be found in Chapter J

Type	Qty.	Order No.
CTI 6	1	9006120000
CTI 6 ZERT	1	9017290000

Additional accessories can be found in Chapter J

## Crimping tools for other contacts

- Ratchet for precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts

**HTI 15**0.5...2.5 mm<sup>2</sup>

For PVC-, PC- and polyamide-insulated connectors

- ~AWG 21...14
- Double-crimp profile, for crimping contact and insulation in one step

**HTN 21**0.5...6 mm<sup>2</sup>

For uninsulated cable lugs and connectors

- ~AWG 21...10
- Rolled cable lugs, for example acc. to DIN 46234
- Tubular cable lugs
- Pin cable lugs
- Parallel and serial connectors
- Indent crimping
- Alternatively available with or without pivoting end stop



## Technical data

## Description of contact

- Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Plug width

## Tool data

- Width  
Weight

## Note

## Ordering data

## Version

**HTI 15**

- Insulated connector  
0.5...2.5 mm<sup>2</sup>  
Red = 0.5...1.5 mm<sup>2</sup>  
Blue = 1.5...2.5 mm<sup>2</sup>  
=

200 mm  
434 g

**HTN 21**

- Uninsulated connection  
0.5...6 mm<sup>2</sup>  
0.5...1.5 mm<sup>2</sup>  
1.1...2.5 mm<sup>2</sup>  
2.6...6 mm<sup>2</sup>

200 mm  
427 g

Without locator

**HTN 21 M. AN.**

- Uninsulated connection  
0.5...6 mm<sup>2</sup>  
0.5...1.5 mm<sup>2</sup>  
1.1...2.5 mm<sup>2</sup>  
2.6...6 mm<sup>2</sup>

200 mm  
427 g

**Type Qty. Order No.**

Type	Qty.	Order No.
HTI 15	1	9014400000
HTI 15 ZERT	1	9017430000

**Type Qty. Order No.**

HTN 21	1	9014610000
HTN 21 ZERT	1	9017380000
HTN 21 AN	1	9014100000
HTN 21 AN ZERT	1	9017170000

Additional accessories can be found in Chapter J

## Note

**Crimping tools for other contacts****contacts**

- Ratchet for precise crimping
- Release option in the event of incorrect operation

**CTN 25 D 4**10...25 mm<sup>2</sup>

For uninsulated cable lugs and connectors

- ~AWG 8..4
- Rolled cable lugs, acc. to DIN 46234
- Pin cable lugs
- Parallel and serial connectors
- Indent crimping

**CTN 25 D 5**10...25 mm<sup>2</sup>

For uninsulated cable lugs and connectors

- ~AWG 8..4
- Cable lugs, acc. to DIN 46235
- Pin cable lugs
- Parallel and serial connectors
- Hexagon crimping

**Technical data****Description of contact**

- Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Plug width

**Tool data**

- Width  
Weight

**Note****Ordering data****Version****CTN 25D4**

- Uninsulated connection  
10...25 mm<sup>2</sup>  
10 mm<sup>2</sup>  
16 mm<sup>2</sup>  
25 mm<sup>2</sup>

**Width**

- 250 mm  
730 g

**Note**

Type	Qty.	Order No.
CTN 25 D4	1	9006220000
CTN 25 D4 ZERT	1	9017350000

Additional accessories can be found in Chapter J

**CTN 25 D5**

- Uninsulated connection  
10...25 mm<sup>2</sup>  
10 mm<sup>2</sup>  
16 mm<sup>2</sup>  
25 mm<sup>2</sup>

**Width**

- 250 mm  
730 g

Type	Qty.	Order No.
CTN 25 D5	1	9006230000
CTN 25 D5 ZERT	1	1292870000

Additional accessories can be found in Chapter J

**Crimping tools for other contacts**

- Ratchet for precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts

**CTX CM 1.6/2.5 / CTX CM 3.6**0.14...10 mm<sup>2</sup>**CTX CM 1.6/2.5**

- Turned HD contacts
- Turned HE contacts
- ConCept M10 and M5 contacts
- ~AWG 26...12
- 0.14...4.0 mm<sup>2</sup>

**CTX CM 3.6**

- Turned HD contacts
- ConCept M3 contacts
- ~AWG 12...8
- 4.0...10 mm<sup>2</sup>

**CTIN CM 1.6/2.5 / CTIN 3.6**0.14...10 mm<sup>2</sup>**CTIN CM 1.6/2.5**

- Turned HD and HE contacts
- Turned HX contacts
- ConCept M10, M5 and M3 contacts
- 4-indent crimp
- ~AWG 26...10
- 0.14...6.0 mm<sup>2</sup>

**CTIN CM 3.6**

- Turned HX contacts
- ConCept M3 contacts
- 4-indent crimp
- ~AWG 16...8
- 1.5...10 mm<sup>2</sup>

**Technical data****Description of contact**

- Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Crimping range 4 (with multiple crimping positions)  
Crimping range 5 (with multiple crimping positions)

**Tool data**

- Width  
Weight

**Note****Ordering data****Version****CTX CM 1.6/2.5**

Turned contacts	Turned contacts
0.14 mm <sup>2</sup> ...4 mm <sup>2</sup>	4 mm <sup>2</sup> ...10 mm <sup>2</sup>
0.14 mm <sup>2</sup> ...0.5 mm <sup>2</sup>	4 mm <sup>2</sup>
0.75 mm <sup>2</sup> ...1 mm <sup>2</sup>	6 mm <sup>2</sup>
1.5 mm <sup>2</sup>	10 mm <sup>2</sup>
2.5 mm <sup>2</sup>	
4 mm <sup>2</sup>	

250 mm	250 mm
730 g	730 g

**CTIN CM 1.6/2.5**

Turned contacts	Turned contacts
0.14 mm <sup>2</sup> ...6 mm <sup>2</sup>	1.5 mm <sup>2</sup> ...10 mm <sup>2</sup>
0.14 mm <sup>2</sup> ...6 mm <sup>2</sup>	1.5 mm <sup>2</sup> ...10 mm <sup>2</sup>

230 mm	230 mm
1220 g	1220 g

**Type**

Type	Qty.	Order No.
CTX CM 1.6/2.5	1	9018490000
CTX CM 1.6/2.5 ZERT	1	9013690000
CTX CM 3.6	1	9018480000
CTX CM 3.6 ZERT	1	1270320000

You will find a large selection of contacts in our current catalogue for Heavy Duty Connectors

**Type**

Type	Qty.	Order No.
CTIN CM 1.6/2.5	1	9205430000
CTIN CM 3.6	1	9205440000

You will find a large selection of contacts in our current catalogue for Heavy Duty Connectors

**Crimping tools for other contacts**

- Ratchet for precise crimping
- Release option in the event of incorrect operation

**HTX LWL**

For fibre-optical cables with

- Core diameter of 1 mm
- Crimping sleeve Ø 5.5 mm

**Station 1:** hexagon crimp

**Station 2:** round crimp (for HP connector)

**Technical data****Description of contact**

Type of contact

Station 1: A / B

Station 2: A / B

Station 3: A / B

C

D

**Tool data**

Width

Weight

**Note****HTX LWL**

Fibre-optic connector

3.15 / 6 mm

4.85 / 6 mm

200 mm

415 g

H. Ø sleeve diameter

**Ordering data****Version**

Type	Qty.	Order No.
HTX LWL	1	9011360000

**Note**

**Crimping tools for other contacts****contacts**

- Ratchet for precise crimping
- Release option in the event of incorrect operation

**IE-CT-SC-GOF / IE-CT-LC-GOF**

Crimping tools for IP 20 + IP 67 connectors




- For fibre-optic SC/ST, IP20 and IP67 connectors
- For fibre-optic LC and IP67 connectors

**IE-CT-SC-POF / IE-CT-SC-GOF-P**

Crimping tools for IP 20 + IP 67 connectors



- For polymer fibre-optic SC/ST, IP20 and IP67 connectors
- For fibre-optic, Profinet and Mobil cable SC/ST and IP67 connectors

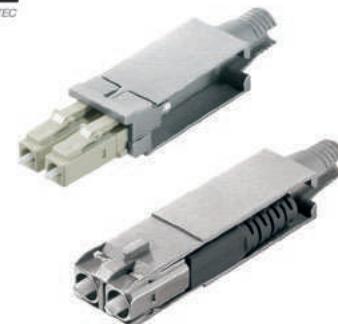**Technical data****Tool data**

Width	250 mm
Weight	730 g

**Note****Ordering data****Version**

Type	Qty.	Order No.
IE-CT-SC-GOF	1	9205320000
IE-CT-LC-GOF	1	9205330000

**Note****IE-CT-SC-POF**

Width	250 mm
Weight	730 g

**IE-CT-SC-GOF-P**

Type	Qty.	Order No.
IE-CT-SC-POF	1	9205340000
IE-CT-SC-GOF-P	1	9205350000

## Crimping tools for other contacts

- Ratchet for precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts

### HTX-IE-POF



- Only one tool needed for all SC-RJ plug processing steps
- For processing 1 mm thick polymer optical fibres, especially for the PROFINET and ETHERNET/IP-SC-RJ connectors
- For stripping Duplex polymer optical fibres
- The plugs are crimped and the POF fibres are separated, all in a single step
- Cut surfaces do not need to be polished after cutting
- Locator for precise positioning of the SC-RJ plugs
- Ergonomic handles
- High repeat accuracy

Three steps to produce IP 67 connectors:

- 1) Strip the polymer optical fibres
- 2) Crimp and separate
- 3) Crimp the strain relief

## Technical data

### Description of contact

Type of contact

### Tool data

Width

Weight

### Note

## Ordering data

### Version

### Note

### HTX-IE-POF

For 1 mm thick polymer optical fibres

220 mm

450 g

Type	Qty.	Order No.
HTX-IE-POF	1	1208870000

**Crimping tool for other contacts****contacts**

- Ratchet for precise crimping
- Release option in the event of incorrect operation
- With locator for exact positioning of the contacts

**CTF PV WM4**2.5...6 mm<sup>2</sup>

- For Weidmüller WM4 photovoltaic connectors and similar plugs
- For Multi-Contact MC4 2.5 mm<sup>2</sup> to 6 mm<sup>2</sup> and similar plugs
- For Hirschmann SunCon 4 mm<sup>2</sup> and similar plugs

**Technical data****Description of contact**

Type of contact

Crimping range

**Tool data**

Width

Weight

**Note****CTF PV WM4**

F-plug / -sleeve

2.5...6 mm<sup>2</sup>

250 mm

730 g

**Ordering data****Version**

Type	Qty.	Order No.
CTF PV WM4	1	1222870000

**Note**

**Crimping tools for other contacts**

- Ratchet for precise crimping
- Release option in the event of incorrect operation

**HTG174 / HTX138 / HTX188**

For coaxial connectors such as BNC, TNC and N plugs


- **HTX 138**

For connectors on Twinax coaxial cable

**HTG 58/59**

For coaxial connectors such as BNC and TNC plugs

- With cables RG 58, RG 59, RG 62, RG 71, ...

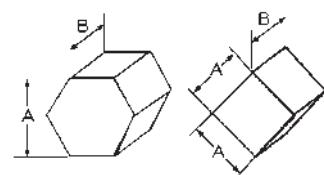

A = Width across flats  
 B = Crimping width  
 C = Ø Outer sleeve of coaxial plug  
 D = Ø Centre contact

**Technical data****Description of contact**

Type of contact

Station 1: A / B

Station 2: A / B

Station 3: A / B

C

D

**Tool data**

Width

Weight

**Note****Ordering data****Version****HTG 174      HTX 138      HTX 188**

HTG 174	HTX 138	HTX 188
Coaxial connector	Coaxial connector	Coaxial connector
4.52 / 10 mm	8.24 / 10 mm	3.25 / 10 mm
1.72 / 2.3 mm	1.72 / 2.3 mm	1.72 / 2.3 mm
5.4 mm	9.5 mm	3.8 mm
2 mm	2 mm	2 mm
200 mm	200 mm	200 mm
420 g	420 g	420 g

**Note****HTG 58/59**

HTG 58/59
Coaxial connector

5.4 / 10 mm
-------------

6.48 / 10 mm
--------------

1.72 / 2.3 mm
---------------

6.2 mm
--------

2 mm
------

200 mm
--------

420 g
-------

**Type      Qty.      Order No.**

HTG 174	1	9012410000
---------	---	------------

HTX 138	1	9012400000
---------	---	------------

HTX 188	1	9011990000
---------	---	------------

**Type      Qty.      Order No.**

HTG 58/59	1	9012020000
-----------	---	------------

**Crimping tools for other contacts**

- Ratchet for precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts
- Contact and insulation are crimped in one step

**HTF SUB-D**

For SUB-D contacts with open crimping claw

- ~AWG 28...20

**D****Technical data****Description of contact**

Type of contact

Station 1: A / B

Station 2: A / B

Station 3: A / B

C

D

**Tool data**

Width

Weight

**Note****HTF SUB-D**

SUB-D

200 mm

438 g

**Ordering data****Version**

Type	Qty.	Order No.
HTF SUB-D	1	9013260000

**Note**

**Crimping tools for other contacts**

- Ratchet for precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts
- Contact and insulation are crimped in one step

**HTF RSV 12 / HTF RSV 16**0.14...2.5 mm<sup>2</sup>**HTF RSV 16**

- ~AWG 26...16

**HTF RSV 12**

- ~AWG 14...12

**HTF ZRV / HTF DFF / HTF AFK 2.5**0.2...2.5 mm<sup>2</sup>**HTF DFF**

For contacts from the Weidmüller DFF series

- ~AWG 24...14
- 0.22...2.5 mm<sup>2</sup>

**HTF ZRV**

For contacts from the Weidmüller ZRV contact system and for MKF flat contacts from Grote &amp; Hartmann and similar designs

- ~AWG 24...17
- 0.2...1.0 mm<sup>2</sup>

**HTF AFK 2.5**

For FEKO ZRV contacts from Weidmüller's ZRV contact system or AFK contacts from Grote &amp; Hartmann and similar designs

- ~AWG 24...12
- 0.2...2.5 mm<sup>2</sup>

**Technical data****Description of contact**

- Type of contact  
Crimping range  
Crimping range 1 (with multiple crimping positions)  
Crimping range 2 (with multiple crimping positions)  
Crimping range 3 (with multiple crimping positions)  
Crimping range 4 (with multiple crimping positions)  
Crimping range 5 (with multiple crimping positions)

**Tool data**

- Width  
Weight

**Note****Ordering data****Version****HTF RSV 12**

RSV and DSTV-HD

2.5 mm<sup>2</sup>4 mm<sup>2</sup>

Crimping range 1

Crimping range 2

Crimping range 3

Crimping range 4

Crimping range 5

**HTF RSV 16 WI**

RSV and DSTV-HD

0.14 mm<sup>2</sup>...0.25 mm<sup>2</sup>0.34 mm<sup>2</sup>...0.75 mm<sup>2</sup>0.34 mm<sup>2</sup>...0.75 mm<sup>2</sup>1 mm<sup>2</sup>...1.5 mm<sup>2</sup>

Crimping range 1

Crimping range 2

Crimping range 3

Crimping range 4

Crimping range 5

**Type****HTF RSV 12****HTF RSV 12 ZERT****HTF RSV 16****HTF RSV 16 ZERT****HTF DFF**

Weidmüller DFF

0.22...2.5 mm<sup>2</sup>0.22...0.35 mm<sup>2</sup>0.5...1 mm<sup>2</sup>1.5...2.5 mm<sup>2</sup>**HTF ZRV**

Weidmüller ZRV

0.2...1 mm<sup>2</sup>0.2...0.35 mm<sup>2</sup>0.5...1 mm<sup>2</sup>1.5...2.5 mm<sup>2</sup>**HTF AFK 2.5**

Weidmüller FEKO ZRV

0.2...2.5 mm<sup>2</sup>0.2...3.5 mm<sup>2</sup>0.5...1 mm<sup>2</sup>1.5...2.5 mm<sup>2</sup>**Note**

**Pressing tools**

- Pressing tool for modular plug connectors of the WE system (Western Electric and DEC)
- Ratchet for precise crimping
- Release option in the event of incorrect operation

**3 functions:**

- Pressing of plug connectors
- Pressing of enclosure shielding
- Crimping of cable shielding

**TT 8 RS MP 8**

For 8-pole shielded RJ45 plugs

- AWG 27...24

**D**

Pressing of IDC contacts



Pressing of shielded enclosures



Crimping of shielded cable

**Technical data****Description of contact**

Number of poles

**Tool data**

Width

Weight

**Note****TT 8 RS MP 8**

8

255 mm

1251 g

**Ordering data****Version**

Type	Qty.	Order No.
TT 8 RS MP 8	1	9202800000

**Note**


You will find a large selection of RJ45 plugs in our current catalogue for Industrial Ethernet

**Pressing tools**

- Pressing tool for modular plug connectors of the WE system (Western Electric and DEC)
- Ratchet for precise crimping
- Release option in the event of incorrect operation


**3 functions:**

- Cutting
- Stripping
- Crimping

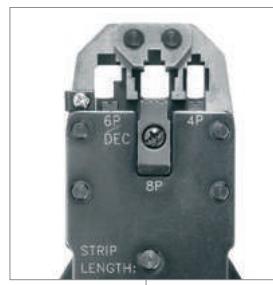**TT 864 RS WE**

For up to 8-pole flat ribbon or flat-oval data cables

- AWG 28...24
- Connection of:
  - 4-pole WE plugs
  - 6-pole (RJ12) WE plugs
  - 6-pole WE plugs (DEC)
  - 8-pole (RJ45) WE plugs
- Triple crimping for RJ45
- For AMP plugs or versions with similar design
- Other versions on request

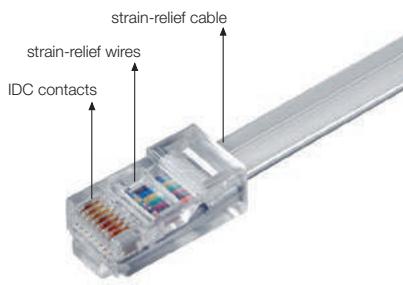**TT 1064 RS WE**

For up to 10-pole flat ribbon or flat-oval data cables

- AWG 28...24
- Connection of:
  - 4-pole WE plugs
  - 6-pole (RJ12) WE plugs
  - 6-pole WE plugs (DEC)
  - 10-pole (RJ45) WE plugs
- Triple crimping for RJ45
- For AMP plugs or versions with similar design
- Other versions on request

**Technical data****Tool data**

Width

Weight

**Note****TT 864 RS**

205 mm

525 g

**TT 1064 RS**

205 mm

531 g

**Ordering data****Version**

Type	Qty.	Order No.
TT 864 RS	1	9008120000

Type	Qty.	Order No.
TT 1064 RS	1	9008190000

**Note**

You will find a large selection of RJ45 plugs in our current catalogue for Industrial Ethernet

You will find a large selection of RJ45 plugs in our current catalogue for Industrial Ethernet

**Accessories****Note**

Type	Qty.	Order No.
ERSATZMESSERSATZ TT864	1	9008130000

Type	Qty.	Order No.
ERSATZMESSERSATZ TT864	1	9008130000

# Mechanical and electrohydraulic cutting and crimping tools

The precision tools from Weidmüller are worldwide in use. This is a responsibility Weidmüller takes seriously, offering comprehensive services to support this global use.

Cables with large cross-sections are used in the generation and distribution of electricity. Reliable and safe connections and user-friendly processing of the cables must be guaranteed. These represent benchmarks of technological advances that are growing in importance.

D



**EPG Cut 40 battery-powered hydraulic cutting****tool**

- Electrohydraulic battery-powered cutting tool
- Cutting of CU-AL conductors up to Ø 40 mm
- Quick closure head rotatable up to 360°
- Automatic pressure limiting and monitoring with pressure sensor
- Motor switch-off and automatic return after completed cutting process
- Electronic control and monitoring of the cutting process
- Integrated service management and software updates via USB
- Multi-function electronics with sleep mode, maintenance display and battery monitoring
- Li-Ion battery with charge state display

**EPG CUT 40****Technical data****Description of contact**

Punching force

**Tool data**

Depth x width x height / Weight

**Note****EPG CUT 40**

30 kN

70 / 80 / 365 mm / 3100 GRM

Weight incl. battery

**Ordering data****Version**

Type	Qty.	Order No.
EPG CUT 40	1	2453830000

**Note**

--

**Accessories**

Replacement battery

Replacement battery

Charger 100 - 240 V AC / 50/60 Hz

Type	Qty.	Order No.
AKKU LI 18B2	1	2858730000
AKKU LI 18B5	1	2860070000
LADEGERAET EPG	1	1509370000

**Note**

--

**Crimping tools**

The cross section can be adjusted by turning the in-built revolving dies. So there is no need of changing dies. Furthermore this tool points by small measurements, light weight, optimized transmission ratio and an extremely high crimping quality due to precisely guided dies.

**PZ PK 6/70**

Crimping tool for crimping compression cable lugs DIN 46235, compression connectors DIN 46267, aluminium cable lugs and connectors.

Crimping profile: hexagonal-shape with control embossing

**PZ RK 6/70**

Crimping tool for crimping tubular cable lugs and connectors of the euro-series

Crimping profile: all around WM Style Crimp with control embossing

**Technical data****Processing area**

Crimping range

Al mm<sup>2</sup>

Crimping width

**Tool data**

Depth

Weight

**Note****PZ PK 6/70**6...70 mm<sup>2</sup>10 ... 50 mm<sup>2</sup>

5 mm

**Tool data**

515 mm

2000 g

**PZ RK 6/70**6...70 mm<sup>2</sup>

5 mm

**Tool data**

515 mm

2000 g

**Ordering data****Version**

Type	Qty.	Order No.
PZ PK 6/70	1	1500470000

Type	Qty.	Order No.
PZ RK 6/70	1	1500440000

**Note**

## Crimping tools

The cross section can be adjusted by turning the in-built revolving crimp insert. So there is no need of changing crimp inserts.

### PZ PK 10/120



Crimping tool for crimping compression cable lugs DIN 46235, compression connectors DIN 46267, aluminium cable lugs and connectors

Crimping profile: hexagonal-shape with control embossing

### PZ RK 10/120



Crimping tool for crimping tubular cable lugs and connectors of the euro-series. Furthermore this tool points by small measurements, light weight and an extremely high crimping quality due to WM-crimping.

Crimping profile: all around WM Style Crimp with control embossing

## Technical data

### Processing area

Crimping range

Al mm<sup>2</sup>

Crimping width

### Tool data

Depth

Weight

### Note

### PZ PK 10/120

10...120 mm<sup>2</sup>

10 ... 70 mm<sup>2</sup>

5 mm

660 mm

4100 g

## Ordering data

### Version

Type	Qty.	Order No.
PZ PK 10/120	1	1500480000

### Note

### PZ RK 10/120

10...120 mm<sup>2</sup>

5 mm

660 mm

4100 g

Type	Qty.	Order No.
PZ RK 10/120	1	1500450000

**Crimping tool EPG 45**

Battery-powered hydraulic compression hand-crimping tool for crimp cable lugs and connectors up to 150 mm<sup>2</sup>.

- extremely quick processing due to a three-stage axial piston pump
- wide application range up to 150 mm<sup>2</sup>
- 270° revolving head with quick opening and closing
- because of a flap closure easy working also in places with difficult access
- automatic pressure limits and monitoring through pressure sensor
- engine shutdown and automatic retract after completed pressing
- electronic regulation and supervision of the press process
- manual retract
- save of all crimps and error messages on internal memory
- selections of all cycles and error messages about USB interface
- no uncompleted pressing cycles through ongoing monitoring of the rest battery cargo load
- controlled engine drive to the life extension of gearbox, engine and battery
- integrated service management and software updates about the USB interface
- fast tool return pipe through high return flow volume
- sleep-mode; maintenance indication and battery control
- integrated, intelligent electronics assembly with multifunctional LED
- mini-USB interface for all standard computer systems for:
  - Crimping force graph and error indication
  - Service Check up
- Li-Ion battery with charge level indicator: 18 V 2 Ah

**EPG 45**

## Included in delivery

- Hydraulic tool including 1x battery and 1x battery charger
- Manual
- Software
- USB connection cable
- Carrying bag for tool and Crimping inserts

**Technical data****Description of contact**

Drive  
Pressing force / Deviation

Crimping range

Charging time

**Tool data**

Depth / Width / Height  
Weight

**Note****Ordering data****Version****Note****Accessories**

Replacement battery  
Replacement battery  
Charger 100 - 240 V AC / 50/60 Hz

**Note****EPG 45**

Electro-hydraulic

45 kN / 16 mm

6...150 mm<sup>2</sup>

0.5 h

70 / 80 / 365 mm

2300 g

Weight incl. rechargeable battery

**Range of application**

Crimping inserts WM-shape for euro-series 6 - 150

Hexagonal crimping inserts for compression cable lugs (DIN 46235) + connectors (DIN 46267) (K5-K22)

Mandrel crimping inserts for compression terminals DIN 46234 6 - 70

Type	Qty.	Order No.
EPG 45	1	1500830000

Type	Qty.	Order No.
AKKU LI 18B2	1	2858730000
AKKU LI 18B5	1	2860070000
LADEGERAET EPG	1	1509370000

Overview of the crimp inserts in the chapter RockStar® Accessories, tools and cable entries.

**WM-shape crimp inserts**

- For processing cable lugs and connectors from the Euro series

**Ordering data**

Cu mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
6	10	7	ES EPG 45 WM 6	1500850000
10/70	8 / 2/0	7/5	ES EPG 45 WM 10/70	1500870000
16/35	6 / 2	7/10	ES EPG 45 WM 16/35	1500920000
25/50	4 / 1	12/10	ES EPG 45 WM 25/50	1500880000
95	3/0	5	ES EPG 45 WM 95	1500890000
120	4/0	5	ES EPG 45 WM 120	1500900000
150	5/0	5	ES EPG 45 WM 150	1994550000

**Hexagonal crimp inserts**

- For Crimping compression cable lugs DIN 46235
- Cu crimp connectors DIN 46267 Part 1
- Al and Al/Cu compression cable lugs and connectors

**Ordering data**

Ident. No.	Cu mm <sup>2</sup>	Al mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
5	6		10	7	ES EPG 45 HEX 6	1500930000
6/16	10/70	-/50	8 / 2/0	7/5	ES EPG 45 HEX 10/70	1500940000
8/12	16/35	-/16+25	6 / 2	12/10	ES EPG 45 HEX 16/35	1500950000
10/14	25/50	10/35	4 / 1	12/5	ES EPG 45 HEX 25/50	1500970000
18	95	70	3/0	5	ES EPG 45 HEX 95	1500980000
20	120		4/0	5	ES EPG 45 HEX 120	1500990000
22	150		5/0	5	ES EPG 45 HEX 150	1994540000

**Indent crimp inserts**

- For crimp cable lugs DIN 46234
- Pin cable lugs DIN 46230
- Connectors, DIN 46341 Part 1

**Ordering data**

Cu mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
6	10	6	ES EPG 45 DIN 6	1501290000
10	8		ES EPG 45 DIN 10	1501320000
16	6	10	ES EPG 45 DIN 16	1501330000
25	4	12	ES EPG 45 DIN 25	1501340000
35	2	12	ES EPG 45 DIN 35	1501350000
50	1	12	ES EPG 45 DIN 50	1501370000
70	2/0	12	ES EPG 45 DIN 70	1501380000

**Trapezoidal crimp inserts**

- Wire end ferrule 25-50 mm<sup>2</sup>

**Ordering data**

Cu mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
25	4		ES EPG 45 AEH 25	1501070000
35	2		ES EPG 45 AEH 35	1501170000
50	1		ES EPG 45 AEH 50	1501180000



**Crimping tools EPG 60 and HPG 60**

- Electrohydraulic battery-powered crimping tool
- Processing of cable lugs and connectors up to 300 mm<sup>2</sup>
- Quick-closure head rotatable up to 270°
- Automatic pressure limiting and monitoring with pressure sensor
- Motor switch-off and automatic return after completed crimping process
- Electronic control and monitoring of the crimping process
- Integrated service management and software updates via USB
- Multi-function electronics with sleep mode, maintenance display and battery monitoring
- Li-Ion battery with charge state display

**EPG 60****HPG 60**

## Included in delivery

- Hydraulic tool including 1x battery and 1x battery charger
- Manual
- Software
- USB connection cable
- Hard case for tool and Crimping inserts

**Technical data****Description of contact**

Pressing force / Deviation

Operating voltage

Crimping range

Charging time

**Tool data**

Depth / Width / Height

Weight

**Note****Ordering data****Version****EPG 60**

60kN / 16 mm

18 V

6...300 mm<sup>2</sup>

0.5 h

**HPG 60**

60kN /

6...300 mm<sup>2</sup>

285 / 500 / 120 mm

2800 g

Weight incl. battery

**Note****Accessories**

Replacement battery

Replacement battery

Charger 100 - 240 V AC / 50/60 Hz

**Note****Type****Qty.****Order No.**

EPG 60 1 2453810000

**Type****Qty.****Order No.**

HPG 60 1 2453820000

**Type****Qty.****Order No.**

AKKU LI 18B2 1 2858730000

AKKU LI 18B5 1 2860070000

LADEGERAET EPG 1 1509370000

**WM-shape crimp inserts**

- For crimping cable lugs and connectors of the Euro series

**Ordering data**

Cu mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
6	10	7	ES EPG/HPG 60 WM 6	2469380000
10	8	7	ES EPG/HPG 60 WM 10	2469540000
16	6	7	ES EPG/HPG 60 WM 16	2469550000
25	4	12	ES EPG/HPG 60 WM 25	2469560000
35	2	5	ES EPG/HPG 60 WM 35	2469570000
50	1	5	ES EPG/HPG 60 WM 50	2469580000
70	2/0	5	ES EPG/HPG 60 WM 70	2469590000
95	3/0	5	ES EPG/HPG 60 WM 95	2469600000
120	4/0	5	ES EPG/HPG 60 WM 120	2469610000
150	5/0	5	ES EPG/HPG 60 WM 150	2469620000
185	6/0	5	ES EPG/HPG 60 WM 185	2469630000
240	450	5	ES EPG/HPG 60 WM 240	2469640000
300	600	5	ES EPG/HPG 60 WM 300	2469650000

**Hexagonal crimp inserts**

- For Crimping compression cable lugs DIN 46235
- CU crimp connectors DIN 46267 Part 1
- Al and Al/Cu compression cable lugs and connectors

**Ordering data**

Ident. No.	Cu mm <sup>2</sup>	Al mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
5	6		10	7	ES EPG/HPG 60 HEX 6	2505150000
6	10		8	7	ES EPG/HPG 60 HEX 10	2505160000
8	16		6	12	ES EPG/HPG 60 HEX 16	2505170000
10	25	10	4	12	ES EPG/HPG 60 HEX 25	2505180000
12	35	16+25	2	5	ES EPG/HPG 60 HEX 35	2505190000
14	50	35	1	5	ES EPG/HPG 60 HEX 50	2505200000
16	70	50	2/0	5	ES EPG/HPG 60 HEX 70	2505210000
18	95	70	3/0	5	ES EPG/HPG 60 HEX 95	2505220000
20	120		4/0	5	ES EPG/HPG 60 HEX 120	2505230000
22	150	95+120	5/0	5	ES EPG/HPG 60 HEX 150	2505240000
25	185	150	6/0	5	ES EPG/HPG 60 HEX 185	2505250000
28	240	185	450	5	ES EPG/HPG 60 HEX 240	2505260000
32	300	240	600	5	ES EPG/HPG 60 HEX 300	2505270000

**Indent crimp inserts**

- For crimping cable lugs DIN 46234
- Pin cable lugs DIN 46230
- Connector DIN 46341 Part 1

**Ordering data**

Cu mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
6	10	5	ES EPG/HPG 60 DIN 6	2505280000
10	8	7	ES EPG 60/HPG DIN 10	2505290000
16	6	10	ES EPG 60/HPG DIN 16	2505300000
25	4	10	ES EPG 60/HPG DIN 25	2505310000
35	2	10	ES EPG 60/HPG DIN 35	2505320000
50	1	12	ES EPG 60/HPG DIN 50	2505330000
70	2/0	12	ES EPG 60/HPG DIN 70	2505340000
95	3/0	16	ES EPG 60/HPG DIN 95	2505350000
120	4/0	16	ES EPG 60/HPG DIN 120	2505360000

**Crimp inserts for insulated crimp cables****Ordering data**

Cu mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
10	8	7	ES EPG 60 ISO 10	2577940000
16	6	7	ES EPG 60 ISO 16	2577950000

**Trapezoidal crimp inserts**

- Wire end ferrule 25-185 mm<sup>2</sup>

**Ordering data**

Cu mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
25	4	22	ES EPG 60/HPG AEH 25	2577810000
35	2	22	ES EPG 60 AEH 35	2577820000
50	1	22	ES EPG 60/HPG AEH 50	2577830000
70	2/0	22	ES EPG 60/HPG AEH 70	2577850000
95	3/0	22	ES EPG 60/HPG AEH 95	2577870000
120	4/0	22	ES EPG 60/HPG AEH 120	2577880000
150	5/0	22	ES EPG 60 AEH 150	2577900000
185	6/0	22	ES EPG 60 AEH 185	2577930000



**Crimping tools APG 80**

Electro-hydraulic battery hand press device for processing cable lugs and connectors of up to 400 mm<sup>2</sup>.

- Extremely fast processing thanks to two-stage hydraulic pump
- Large processing range up to 400 mm<sup>2</sup>
- 360° revolving quick-action crimping head
- Pressure release button actuated from both sides (left and right-handed use) in single-handed operation
- Integrated overpressure valve, no damage to tool or inserts even in the event of mispressings
- Powerful Li-Ion battery
- High capacity due to 5 Ah battery
- Fixing lugs available for balancer and carry strap
- Ergonomic handle and balanced weight distribution ensure fatigue-free and safe operation
- The enclosure, handle shell and pressure release button are made entirely from insulating and impact-resistant plastic material
- All-purpose usage: inserts are available for all cable lug types
- Integrated electronics module for:
  - Permanent battery charge level monitoring
  - Monitoring of the working cycle and status display
  - Display of next service interval
  - Error display in the event of malfunctions

D

**APG 80**6...400 mm<sup>2</sup>

Included in delivery

- Battery-powered compression tool with battery and battery charger
- supporting loop for transport and safety
- transport plastic case

**Technical data****Description of contact**

Pressing force 80kN / Deviation

**Operating voltage**

Crimping range

**Charging time****Tool data**

Depth / Width / Height

Weight

**Note****Ordering data****Version****APG 80**

80kN / 37 mm

18 V

6...400 mm<sup>2</sup>**Note****Accessories**

Replacement battery

Replacement battery

Charger 100 - 240 V AC / 50/60 Hz

**Note**

Type	Qty.	Order No.
APG 80	1	2853270000

Type	Qty.	Order No.
AKKU LI 18B2	1	2858730000
AKKU LI 18B5	1	2860070000
LADEGERAET EPG	1	1509370000

**WM-shape crimp inserts**

- For processing cable lugs and connectors from the Euro series

**Ordering data**

Cu mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
6	10	7	ES APG 80 WM 6	1502430000
10	8	7	ES APG 80 WM10	1502440000
16	6	7	ES APG 80 WM 16	1502470000
25	4	12	ES APG 80 WM 25	1502480000
35	2	12	ES APG 80 WM 35	1502490000
50	1	12	ES APG 80 WM 50	1502500000
70	2/0	12	ES APG 80 WM 70	1502520000
95	3/0	12	ES APG 80 WM 95	1502530000
120	4/0	12	ES APG 80 WM 120	1502540000
150	5/0	5	ES APG 80 WM 150	1502550000
185	6/0	5	ES APG 80 WM 185	1502570000
240	450	7	ES APG 80 WM 240	1502580000
300	600	7	ES APG 80 WM 300	1502590000
400	750	7	ES APG 80 WM 400	2578060000

**Hexagonal crimp inserts**

- For crimping compression copper cable lugs DIN 46235
- Compression copper connectors DIN 46 267 part 1
- Aluminium and aluminium/copper cable lugs and connectors

**Ordering data**

Ident. No.	Cu mm <sup>2</sup>	Al mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
5	6		10	7	ES APG 80 HEX 6	1502600000
6	10		8	7	ES APG 80 HEX 10	1502620000
8	16		6	12	ES APG 80 HEX 16	1502630000
10	25	16	4	12	ES APG 80 HEX 25	1502640000
12	35	25	2	12	ES APG 80 HEX 35	1502650000
14	50	35	1	12	ES APG 80 HEX 50	1502670000
16	70	50	2/0	12	ES APG 80 HEX 70	1502680000
18	95	70	3/0	10	ES APG 80 HEX 95	1502690000
20	120		4/0	10	ES APG 80 HEX 120	1502700000
22	150	95+120	5/0	5	ES APG 80 HEX 150	1502720000
25	185	150	6/0	5	ES APG 80 HEX 185	1502730000
28	240	185	450	5	ES APG 80 HEX 240	1502740000
32	300	240	600	7	ES APG 80 HEX 300	1502750000
32	300	240	600	7	ES APG 80 HEX 300AL	1502780000

**Indent crimp inserts**

- For crimp cable lug DIN 46234
- Pin cable lugs DIN 46230
- Connectors, DIN 46341 Part 1

**Ordering data**

Cu mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
6	10	6	ES APG 80 DIN 6	1502820000
10	8		ES APG 80 DIN 10	1502830000
16	6	10	ES APG 80 DIN 16	1502840000
25	4	11	ES APG 80 DIN 25	1502850000
35	2	11	ES APG 80 DIN 35	1502870000
50	1	16	ES APG 80 DIN 50	1502880000
70	2/0	16	ES APG 80 DIN 70	1502890000
95	3/0	16	ES APG 80 DIN 95	1502900000
120	4/0	16	ES APG 80 DIN 120	1502790000
150	5/0	16	ES APG 80 DIN 150	1502800000
185	6/0	8	ES APG 80 DIN 185	1501800000
240	450	8	ES APG 80 DIN 240	1501820000

**Trapezoidal crimp inserts**

- For the processing of isolated and non-isolated wire-end ferrules
- Pressing width 24 mm (with 10 to 120 mm<sup>2</sup>)
- Pressing width 38 mm (with 150 to 240 mm<sup>2</sup>)

**Ordering data**

Cu mm <sup>2</sup>	AWG	Crimping width, mm	Type	Order No.
50	1	24	ES APG 80 AEH 50	1502050000
70	2/0	24	ES APG 80 AEH 70	1502070000
95	3/0	24	ES APG 80 AEH 95	1502080000
120	4/0	24	ES APG 80 AEH 120	1502090000
150	5/0	38	ES APG 80 AEH 150	1502100000



**Replacement Li-Ion battery  
for APG / EPG**
**Ordering data**

Type	Battery	Weight	Order No.
AKKU LI 18B2	Li-Ion 18 V / 2 Ah	600 g	2858730000
AKKU LI 18B5	Li-Ion 18 V / 5 Ah	800 g	2860070000

**Charger for APG / EPG****Ordering data**

Type	Electrical connection	Voltage range	Order No.
LADEGERAET EPG	100 - 240 V AC / 50/60 Hz	12 / 14.4 / 18 V	1509370000



**Insertion tool for twisted-pair cable**

For connecting twisted-pair cable to terminal rails with IDC contacts e.g. in main and floor distributors, and in modular wall junction boxes for structured building cabling.

**PDT**

The punch-down tool has the following features:

- Mechanism made from metal components
- Adjustable pressing force for conductor sizes AWG 20 to AWG 28
- Different blades for connector blocks of type 110 from AT&T, type 66, type LSA Plus from Krone (standard and scissors cutting function) as well as for telephone outlets 630A6
- Incision blades with 2 functions: incision or incision with cutting off of remaining conductor
- Storage compartment for one blade



A = PD blade 110  
B = PD blade 66  
C = PD blade 630  
D = PD blade Krone LSA (standard)  
E = PD blade Krone LSA (scissors)

**Technical data****Housing specification**

Depth / Width / Height  
Weight

**Note****Ordering data****Version****PUNCH DOWN TOOL PDT**

37 / 160 / 29 mm

142 g

**Note****Accessories****Note****Type****Qty.****Order No.**

PUNCH DOWN TOOL PDT	1	<b>9013970000</b>
---------------------	---	-------------------

(without blade)

**Type****Qty.****Order No.**

ERME 110 PDT	1	<b>9013960000</b>
ERME 66 PDT	1	<b>9013980000</b>
ERME 630 PDT	1	<b>9013990000</b>
ERME LSA PLUS STANDARD	1	<b>9014000000</b>
ERME LSA PLUS SCHERE	1	<b>9014050000</b>

**Removal Tool CM3, CM5, HD****Removal tool HD****CM3 Removal Tool**

Contact release tool for freeing crimp contacts in the Concept CM3 module

**CM5 Removal Tool**

Contact release tool for freeing crimp contacts in the Concept CM5 module

**HD Removal Tool**

Contact release tool for freeing crimp contacts in the Concept CM10 module

**Ordering data**

Type	Qty.	Order No.
REMOVAL TOOL CM 3	1	1866710000
REMOVAL TOOL CM 5	1	1866720000
REMOVAL TOOL HD	1	1866730000

**Removal Tool CM20****Removal Tool CM 20**

Contact release tool for freeing crimp contacts in the Concept CM20 module

**Ordering data**

Type	Qty.	Order No.
REMOVAL TOOL CM 20	1	1866740000

**Removal Tool HE****Removal Tool HE**

Contact release tool for the ConCept HE module and for releasing crimp contacts in the ConCept CM4 module

**Ordering data**

Type	Qty.	Order No.
REMOVAL TOOL HE	1	1866750000

**HDC-DW RSV 1.6**

Contact release tool for the ConCept module, or for dismantling stamped HD pin and socket contacts of type CB/CS and GB/GS

**Ordering data**

Type	Qty.	Order No.
DW RSV 1.6	1	9004530000

**Removal Tool AFK**

Contact release tool for loosening FEKO ZRV contacts.

**Ordering data**

Type	Qty.	Order No.
REMOVAL TOOL AFK	1	1866760000

**Replacement sleeve for contact release tool****Ordering data**

Type	Qty.	Order No.
HÜLSE REMOVAL TOOL HD	5	1044100000
HÜLSE REMOVAL TOOL CM 3	5	1044080000
HÜLSE REMOVAL TOOL CM 5	5	1044090000



**HTX-HDC/POF****POF crimping**

Crimping of "polymer optical fibre" (POF) fibre-optical contacts.

- For plug and socket
- Ratchet for precise crimping
- Unlocks in case of incorrect operation
- Locator for precise contact positioning

**Contacts:**

- Fibre-optic cable HD contact socket for Ø1.0 mm POF
- Fibre-optic cable HD contact pin for Ø 1.0 mm POF

**Ordering data**

Type	Qty.	Order No.
HTX-HDC/POF	1	9010950000

**Technical data**

Depth	
Weight	438 g

**PB LWL/POF / PS LWL/POF****POF polishing**

For processing the cut surface of fibre-optic cables with polymer optical fibre (POF).

- Buffing disc (PS LWL/POF)
- Buffing sheet (PB LWL/POF)

**AM LWL/POF****POF stripping**

Stripping fibre-optic cables. Fibre-optic cable with polymer optical fibres (POF).

- Longitudinal stop with scale is built into the tool
- Stripping direction is lengthwise to the fibre
- No damage to the optical fibre

**LWL-stripax®**

Stripping and cutting tool for plastic fibre-optic cables with 1 mm diameter inner conductor

- Stripping length adjustable via end stop
- Automatic opening of the clamping jaws after stripping

**Ordering data**

Type	Qty.	Order No.
AM LWL/POF	1	9020360000

**Ordering data**

Type	Qty.	Order No.
M-D-STRIPAX LWL	1	9003750000



## Cable tie tools

## RT 1



## WSM Tool



For plastic cable ties with widths of 2.5...4.8 mm and a thickness of up to 1.6 mm.

- Tensioning and separating of cable ties in one step
- The tensioning force can be adjusted over a wide range to cover small to standard cable ties.
- For cable bundles of 1.6 mm to 100 mm diameter

For steel cable ties, 4.6 mm wide

- Tensioning and automatic separation of projecting cable ties in one step
- For steel cable ties, e.g. Weidsteel from Weidmüller



## Technical data

## Housing specification

Depth

Weight

## Note

## KABELBINDERZANGE RT-1

20 mm

260 g

## Ordering data

## Version

Type	Qty.	Order No.
KABELBINDERZANGE RT-1	1	1296000000

## Note

## WSM TOOL AUTOMATIK

20 mm

579 g

Type	Qty.	Order No.
WSM TOOL AUTOMATIK	1	1774470000

## Cable tie tools

## WSM Tool



For steel cable ties, 4.6 mm wide

- For pulling the steel cable ties tight; afterwards the cable tie can be removed by turning it 90°.

Crimping

D



## Technical data

## Housing specification

Depth  
Weight

## Note

## WSM TOOL MANUELL

20 mm  
633 g

## Ordering data

## Version

Type	Qty.	Order No.
WSM TOOL MANUELL	1	1774480000

## Note

**Operating aid for hand tools**

- Simple hand tool mounting
- Less manual force needed thanks to leverage
- Fast tool change
- Maintenance-free
- For medium-sized batches

**D****EASYCRIMP**

- Operating aid for mechanical crimping tools
- Reliable quality from Weidmüller
- Wire-end ferrules, cable lugs and connectors

**Technical data**

Drive
Fixing max.
Fixing min.
Grip width max.
Grip width max.
Grip height min.
Lever travel max.
Lever travel min.
Width / Depth / Height
Weight

**EASYCRIMP**

mechanical
68 mm
35 mm
28 mm
22 mm
12 mm
230 mm
140 mm
230 / 125 / 255 mm
5 kg

**Note****Ordering data****Version**

Type	Qty.	Order No.
EASYCRIMP	1	2000360000

**Note**

# Pliers

<b>Pliers</b>	
Introduction	E.2
VDE-insulated combination pliers	E.3
VDE-insulated diagonal-cutting pliers	E.4
VDE-insulated telephone pliers	E.5
VDE-insulated flat- and round-nose pliers	E.6
Wire stripping tools	E.7
Water pump pliers	E.8
ESD pliers	E.10
Pliers	E.12


# Grip it – don't slip

## Working with our tool, that's the new rule.

**Worldwide proven pliers that give you superpowers  
in all work areas**

Are you ready to achieve top performance? Then you are optimally served with our range of pliers – by the way, also for dangerous operations. Particularly when working under voltage, special guidelines must be observed and special tools used. In our wide range of pliers you will find products that have been designed precisely for such applications. Of course, they comply with all current national and international test standards such as DIN EN 60900.

E

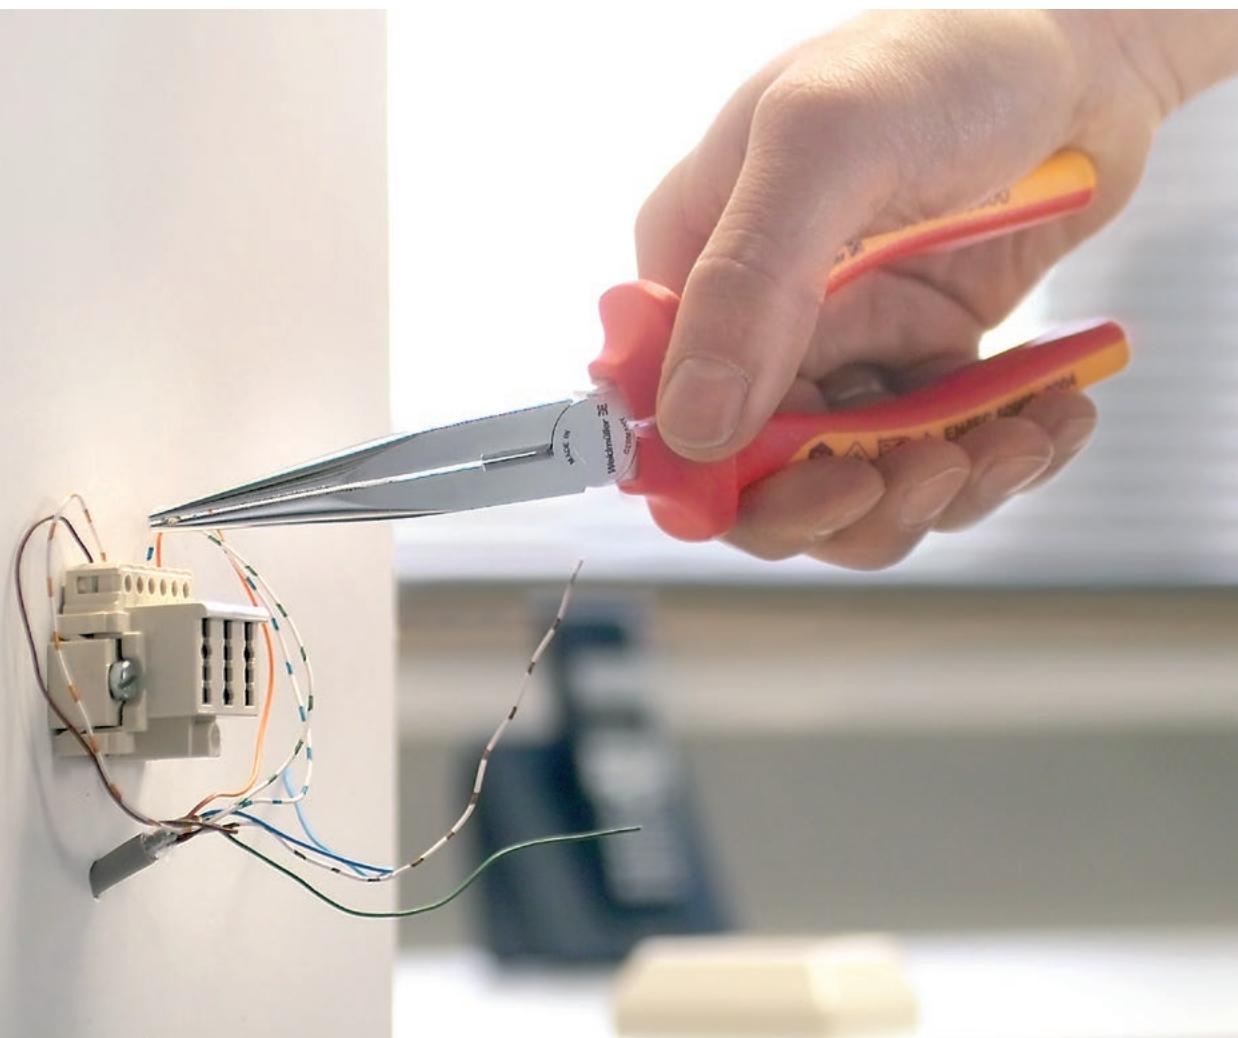

**VDE-insulated combination pliers**

Up to 1,000 V (AC) and 1,500 V (DC)

Protective insulation according to IEC 900, DIN EN 60900

- Drop-forged from high-quality special tool steels
- Safety handles with ergonomic and non-slip TPE VDE sleeve
- Made from shockproof, heat and cold resistant, non-flammable, cadmium-free TPE (thermoplastic elastomer)
- Elastic grip zone and hard core
- Highly-polished surface
- Electro-galvanised coating (nickel-chromium) protects against corrosion

**KBZ 160 / KBZ 180 / KBZ 200**


Combination pliers

**KBZI 200**


Power combination pliers heavy-duty model (telegraph pliers)

**Combination pliers acc. to DIN ISO 5746**

- With opening gap (see diagram)
- Films and metal sheets up to a thickness of 2.5 mm are gripped with the tip
- Up to a thickness of 2.5 mm, the gripping force pulls the workpiece towards the joint
- Extra-long cutter for ribbon and round cables
- For cutting soft and hard wires
- Cutting edges inductively hardened to approx. 60 HRC

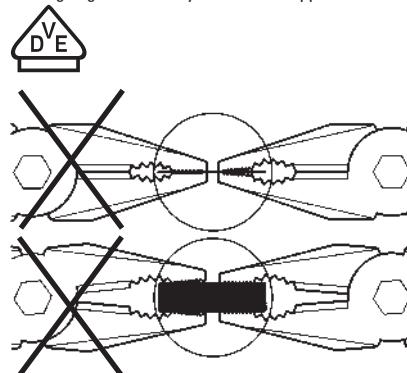**Telegraph pliers (combination pliers) acc. to DIN 5746**

- Heavy-duty model for demanding requirements
- Extra-long cutter for ribbon and round cables
- For cutting soft and hard wires
- Cutting edges inductively hardened to approx. 64 HRC
- For soft and piano wire

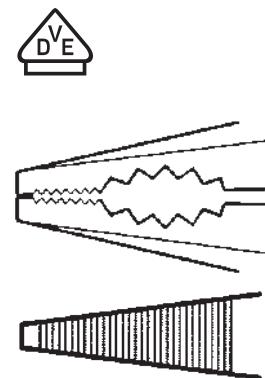**Technical data****Cutting performance**

Conductor diameter, max. (MH)  
Conductor diameter, max. (H)  
Conductor diameter, max. (P)

**Tool data**

Cutter hardness

Total length

Weight

**Note****KBZ 160      KBZ 180      KBZ 200**

2.5 mm	2.8 mm	3 mm
1.8 mm	2.5 mm	2.5 mm

**KBZI 200****KBZI 200**

3.8 mm
2.7 mm
2.3 mm

**KBZI 200**

64 HRC

200 mm

412 g

(MH) semi-hard wire; (H) hard wire; (P) piano wire

**Ordering data****Version**

Type	Qty.	Order No.
KBZ 160	1	9046280000
KBZ 180	1	9046290000
KBZ 200	1	9046300000

Type	Qty.	Order No.
KBZI 200	1	9046430000

**Note**

**VDE-insulated diagonal-cutting pliers**

Up to 1,000 V (AC) and 1,500 V (DC)

Protective insulation according to IEC 900, DIN EN 60900

- Drop-forged from high-quality special tool steels
- Safety handles with ergonomic and non-slip TPE VDE sleeve
- Made from shockproof, heat and cold resistant, non-flammable, cadmium-free TPE (thermoplastic elastomer)
- Elastic grip zone and hard core
- Highly-polished surface
- Electro-galvanised coating (nickel-chromium) protects against corrosion

**KSE 160 / KSE 200 / SE TOP**

Professional diagonal-cutting pliers for piano wire

**SE HD 140 / SE HD 160 / SE HD 180**

Diagonal-cutting pliers for hard wire

**Diagonal-cutting pliers acc. to DIN ISO 5749**



- Cutting edges inductively hardened to approx. 64 HRC
- For cutting soft wires and piano wire

**KSE 160 - KSE 200**

- Optimised transmission of force
- Optimised precision cutting edge

**SE TOP**

- With inlaid joint
- With precision cutting edges

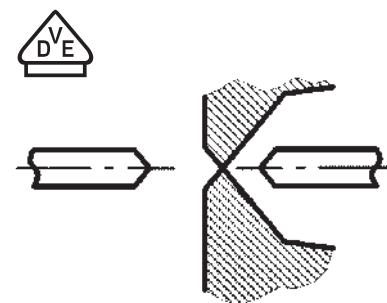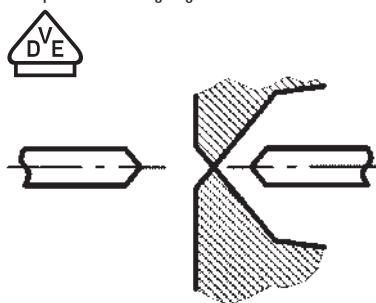**Technical data****Cutting performance**

Conductor diameter, max. (MH)  
Conductor diameter, max. (H)  
Conductor diameter, max. (P)

**Tool data**

Cutter hardness  
Total length  
Weight

**Note****Ordering data****Version**

KSE 160	KSE 200	SE TOP
3.5 mm	4.2 mm	3.5 mm
2.5 mm	3 mm	2.5 mm
2 mm	2.5 mm	2 mm
64 HRC	64 HRC	64 HRC
160 mm	200 mm	160 mm
243 g	325 g	251 g

(MH) semi-hard wire; (H) hard wire; (P) piano wire

SE HD 140	SE HD 160	SE HD 180
2.8 mm	3 mm	3.8 mm
2 mm	2.3 mm	3 mm
1.4 mm	1.6 mm	1.8 mm
62 HRC	62 HRC	62 HRC
140 mm	160 mm	180 mm
203 g	253 g	291 g

(MH) semi-hard wire; (H) hard wire; (P) piano wire

Type	Qty.	Order No.
SE HD 140	1	9046310000
SE HD 160	1	9046320000
SE HD 180	1	9046330000

**Note**

**VDE-insulated telephone pliers**

Up to 1,000 V (AC) and 1,500 V (DC)

Protective insulation according to IEC 900, DIN EN 60900

- Drop-forged from high-quality special tool steels
- Safety handles with ergonomic and non-slip TPE VDE sleeve
- Made from shockproof, heat and cold resistant, non-flammable, cadmium-free TPE (thermoplastic elastomer)
- Elastic grip zone and hard core
- Highly-polished surface
- Electro-galvanised coating (nickel-chromium) protects against corrosion

**FRZ SG 160 / FRZ SG 200**

Half-round-nose pliers with cutter (telephone pliers)

**FRZ S 160 / FRZ S 200**

Half-round-nose pliers with cutter (telephone pliers)

**Bent telephone pliers with cutter**



acc. to DIN ISO 5745 • Half-rounded jaws

- Serrated gripping surfaces
- Tip bent at 45°
- Cutting edges inductively hardened to approx. 60 HRC
- Special tool steel

**Telephone pliers with cutter**

acc. to DIN ISO 5745

- Half-rounded jaws
- Serrated gripping surfaces
- Cutting edges inductively hardened to approx. 60 HRC
- Special tool steel

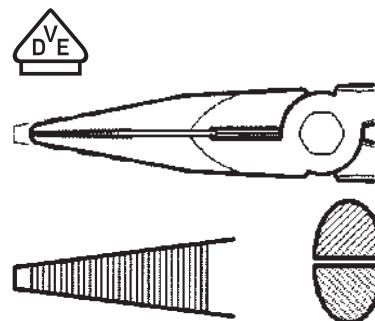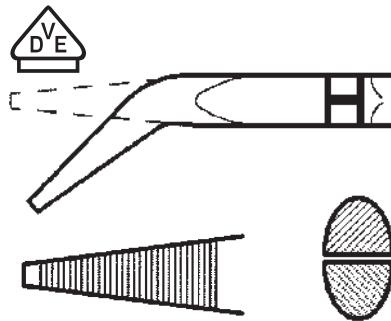**Technical data****Cutting performance**

Conductor diameter, max. (MH)

Conductor diameter, max. (H)

**Tool data**

Cutter hardness

Total length

Weight

**Note****FRZ SG 160**

2.5 mm

1.6 mm

60 HRC

160 mm

162 g

(MH) semi-hard wire; (H) hard wire; (P) piano wire

**FRZ SG 200**

2.8 mm

1.8 mm

60 HRC

200 mm

207 g

**FRZ S 160**

2.5 mm

1.6 mm

60 HRC

160 mm

170 g

(MH) semi-hard wire; (H) hard wire; (P) piano wire

**FRZ S 200**

2.8 mm

1.8 mm

60 HRC

200 mm

224 g

**Type**

FRZ SG 160

FRZ SG 200

**Qty.**

1

1

**Order No.**

9046390000

9046400000

**Type**

FRZ S 160

FRZ S 200

**Qty.**

1

1

**Order No.**

9046370000

9046380000

**Ordering data****Version****Note**

**VDE-insulated flat- and round-nose pliers**

Up to 1,000 V (AC) and 1,500 V (DC)

Protective insulation according to IEC 900, DIN EN 60900

- Drop-forged from high-quality special tool steels
- Safety handles with ergonomic and non-slip TPE VDE sleeve
- Made from shockproof, heat and cold resistant, non-flammable, cadmium-free TPE (thermoplastic elastomer)
- Elastic grip zone and hard core
- Highly-polished surface
- Electro-galvanised coating (nickel-chromium) protects against corrosion

**FZ 160**

Flat-nose pliers

**RZ 160**



Round-nose pliers

**Flat-nose pliers acc. to DIN ISO 5745**

- Serrated gripping surface
- With long jaw

**Round-nose pliers acc. to DIN ISO 5745**

- Serrated gripping surface
- With long jaw

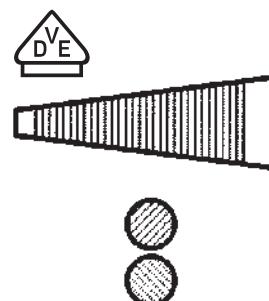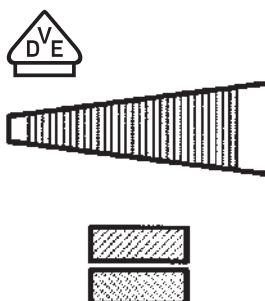**Technical data****Tool data**

Total length

160 mm

Weight

163 g

**Note**

160 mm

153 g

**Ordering data****Version**

Type Qty. Order No.

FZ 160 1 9046350000

Type Qty. Order No.

RZ 160 1 9046360000

**Note**

## Wire stripping tools

Up to 1,000 V (AC) and 1,500 V (DC)

Protective insulation according to IEC 900, DIN EN 60900

- Drop-forged from high-quality special tool steels
- Safety handles with ergonomic and non-slip TPE VDE sleeve
- Made from shockproof, heat- and cold-resistant, non-flammable, cadmium-free TPE (thermoplastic elastomer)
- Elastic grip zone and hard core
- Highly-polished surface
- Nickel-chromium electro-galvanised coating protects against corrosion

## AIZ 160

Wire stripping pliers



### Wire-stripping pliers according to DIN ISO 5744

- For stripping cables and individual wires with an outer Ø of up to 5 mm
- Drop-forged
- High-frequency induction-tempered
- Setscrew and lock nut for setting the required wire diameter
- Opening spring for comfortable work
- Special tool steel

## Technical data

### Max. stripping performance

Stripping diameter, max.

### Tool data

Total length

Weight

### Note

## Ordering data

### Version

### AIZ 160

5 mm

160 mm

193 g



### Note

Type	Qty.	Order No.
AIZ 160	1	9046440000

**Water pump pliers**

- Quick adjustment by push button
- No unintentional change of setting
- Large gripping range: pipes up to 2 inch, nut 46 mm
- Counter-rotating teeth in the rear jaw area for powerful gripping
- Reinforced self-clamping due to optimised jaw design

**WPZ 250**

E

**Technical data****Max. stripping performance**

Total length

Weight

**Note****WPZ 250**

250 mm

200 GRM

**Ordering data****Version**

Type	Qty.	Order No.
WPZ 250	1	<b>2886220000</b>

**Note**




# ESD pliers

Weidmüller ESD pliers can be used with precision and safety when working with sensitive electronics. Electrostatic charging is prevented by the special material on the handle.

Electrostatic discharges (ESD) present a danger to electronics that should not be underestimated. The transferral or discharge of an electrostatic charge can cause significant damage. Charges smaller than 100 volts can cause damage to sensitive components. However, ESD with voltages under 2,000 volts can not be felt by humans. When working with components which are particularly sensitive to electrostatic discharges therefore, you need an electrostatic-free work environment and the properly designed tools.

The ESD pliers are particularly suited for use with electronics, including electronic switches and components, as well as with precision mechanics. All pliers feature an ESD-protected, two-coloured, double-component plastic hand grip. The grip material complied with all of the requirements for ESD hand-tool protection for working with ESD-sensitive components.

The 120 mm-long ESD pliers are available individually or as part of a four-piece set: diagonal-cutting pliers, angle-cutting pliers, with pointed head, flat-nose pliers and snipe-nosed pliers. ESD pliers are not appropriate for working with live components or component assemblies.

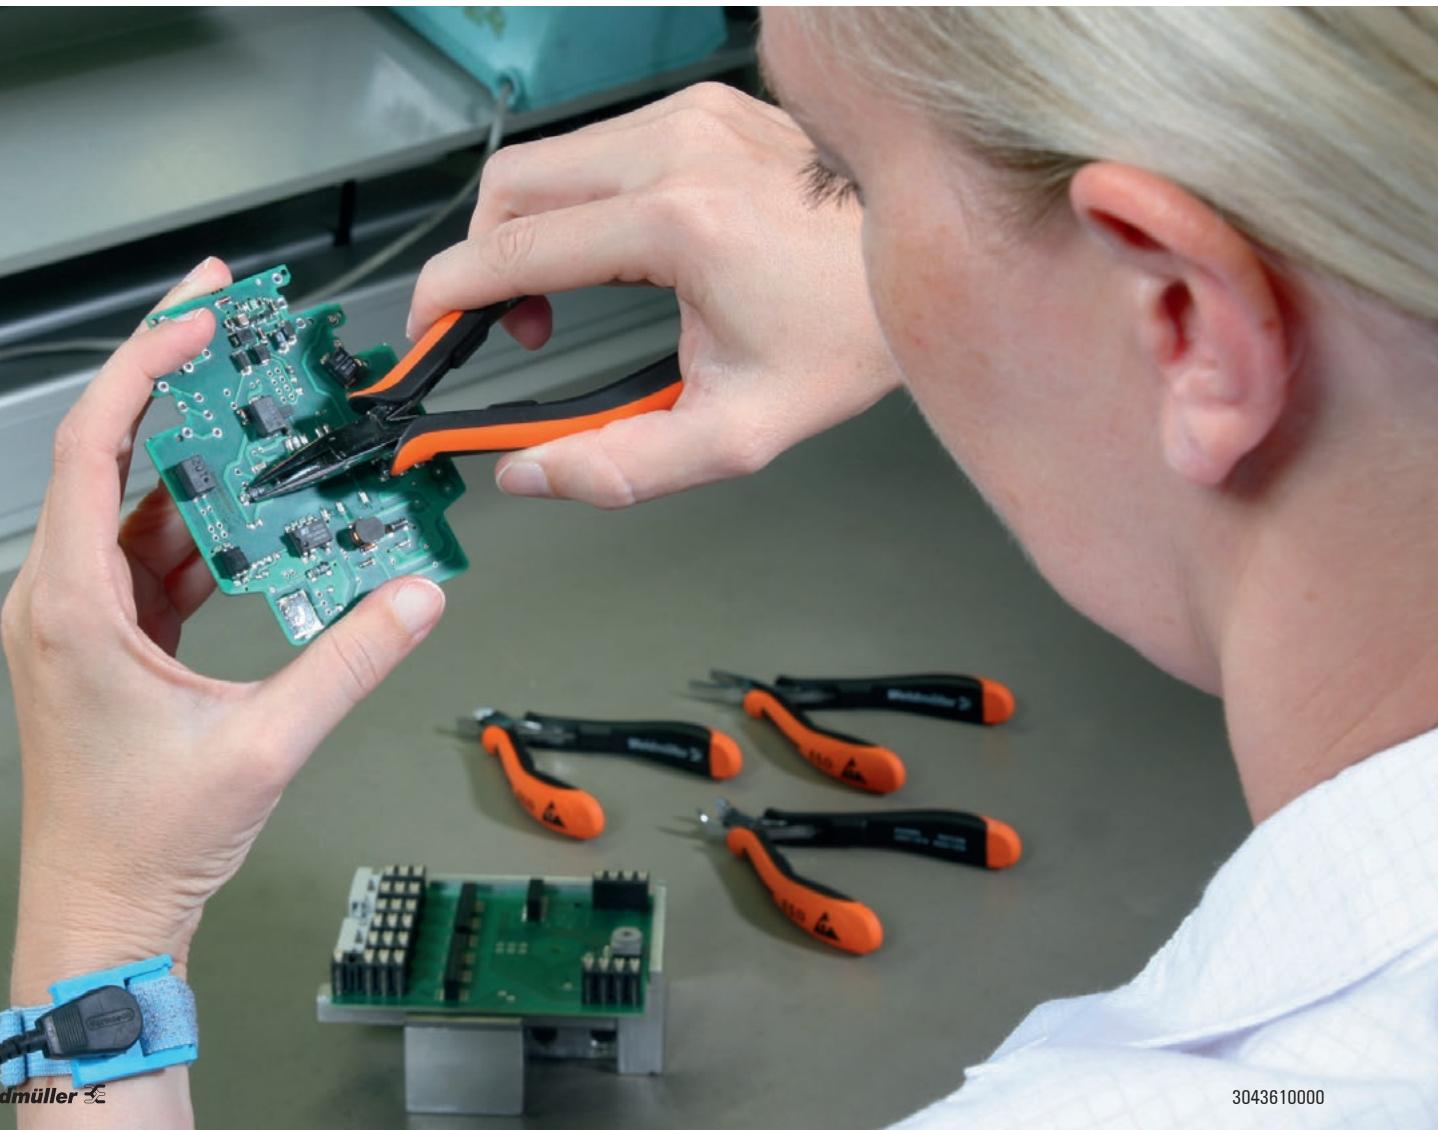

**SEE ESD 120****Electronic ESD diagonal-cutting pliers with pointed head**

- Hard wire (spring wire/steel nails): 0.2 mm/AWG 32
- Semi-hard wire (iron/nails): 1.0 mm/AWG 18
- Soft wire (copper/aluminium): 1.5 mm/AWG 15

**Ordering data**

Type	Qty.	Order No.
SEE ESD 120	1	9205130000

**Technical data**

Weight	90 g
--------	------

**SEE ESD 125****Electronic ESD diagonal-cutting pliers with oval head**

- Semi-hard wire (iron/nails): 0.3 mm/AWG 29
- Soft wire (copper/aluminium): 1.5 mm/AWG 15

**Ordering data**

Type	Qty.	Order No.
SEE ESD 125	1	9204750000

**Technical data**

Weight	90 g
--------	------

**FZE ESD 130****Electronic ESD flat-nosed pliers****Ordering data**

Type	Qty.	Order No.
FZE ESD 130	1	9204760000

**Technical data**

Weight	90 g
--------	------

**SZE ESD 130****Electronic ESD Snipe-nosed pliers****Ordering data**

Type	Qty.	Order No.
SZE ESD 130	1	9204770000

**Technical data**

Weight	90 g
--------	------

**SVSE ESD 130****Electronic ESD angle-cutting pliers**

- Hard wire (spring wire or steel nails): 0.6 mm/AWG 22
- Semi-hard wire (iron or nails): 1.0 mm/AWG 18
- Soft wire (copper or aluminium): 1.2 mm/AWG 16

**Ordering data**

Type	Qty.	Order No.
SVSE ESD 130	1	9205140000

**Technical data**

Weight	93 g
--------	------



**SUPER CUT****Electronic diagonal-cutting pliers**

- Soft wire (copper): 2 mm/AWG 12

**Ordering data**

Type	Qty.	Order No.
SUPER CUT	1	9205150000

**KOF SET ESD****Electronic ESD case set**

Contents:

- Diagonal-cutting pliers
- Snipe-nosed pliers
- Flat-nose pliers
- Angle-cutting pliers

**Ordering data**

Type	Qty.	Order No.
KOF SET ESD	1	9205210000



# Screwdrivers


<b>Screwdrivers</b>	
Introduction - Screwdrivers	F.2
Introduction - Electric screwdrivers	F.4
Torque screwdriver with rechargeable battery	F.6
Bits	F.8
Torque screwdrivers	F.12
Uninsulated torque screwdrivers	F.13
VDE-insulated torque screwdrivers	F.14
Special tools SAI	F.16
Cable gland tools	F.18
Screwdriver with cutting and stripping adapter	F.19
SlimLine screwdrivers	F.20
Screwdrivers	F.24
VDE-insulated screwdrivers	F.25
Uninsulated screwdrivers	F.29
Voltage tester	F.33
Weidmüller Allen key set	F.34
Pin and electrical cabinet key	F.35

# Tighten it – don't slip

## Working with our tool, that's the new rule.

### Robust screwdrivers to handle any screw in the twinkling of an eye

You can achieve a lot with tremendous power if you know how to use it precisely. When working with our screwdrivers, power and precision are in perfect balance. So you can turn any screw without destroying it. The secret lies in the unique handle design. It is extremely ergonomic, guarantees perfect handling, and supports different working methods. This always guarantees optimal transmission of the axial force. And for those who need even more dexterity when screwing, for example when working with sensitive components, our torque screwdrivers with unique bit changing system are the first choice.

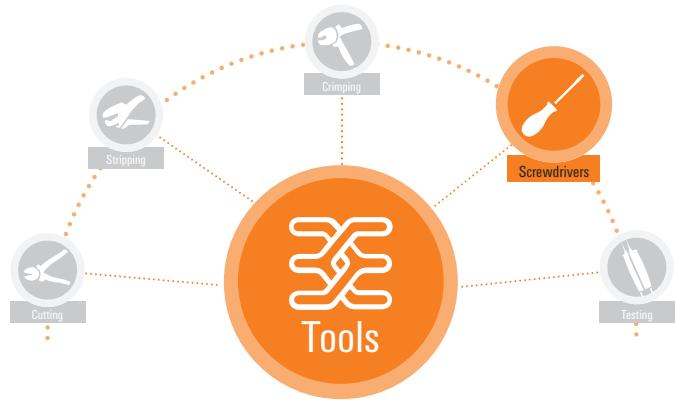

**Precision screwdriver** with Quick-turning zone as soft component with ergonomic finger recess enables fast and precise screwing

**Torque screwdrivers** with ergonomic handles and the unique bit system



Weidmüller's **uninsulated screwdrivers** for use in dry conditions and for general applications offers customers a complete range of screwdrivers that enables far higher torques as well as substantially more comfort due to the soft material of the grip.

**VDE-insulated screwdriver**  
according to DIN EN 60900,  
IEC 900 for work on live  
equipment

The protective insulation moulded directly on the screwdriver blade ensures electrical safety, up to 1,500 volts DC and 1,000 volts AC, even in critical applications

# Electric screwdrivers



## Electric screwdrivers / Weidmüller bits

Weidmüller **screwdrivers** are ideal for use with one hand due to their ergonomic design. They guarantee fatigue-free working whatever direction they are being used in, with an automatic torque limit and high a repetition accuracy.

The Weidmüller **bits** are standard, of high quality, with a wide range to choose from and all delivering superior performance. We use processor-controlled hardening processes which guarantee consistently high product quality.

The high-grade material enables torques far above those stipulated in the relevant DIN standards:

- DIN 5261 for PH/PZ bits
- DIN 5263 for slotted bits
- Camcar standard for TRX bits

This means long service life at high torques, producing ideal conditions for standard work.



## Product benefits

- Suitable for all screw driving tasks
- Ideal for both manual and machine screw driving tasks due to the high hardness values of 59 – 61 HRC
- Good wear resistance and therefore a long service life
- Optimum fit in DIN screws for low wear and optimum torque transmission
- Manufactured with consistently high product quality based on the relevant ISO standards

**Easy handling**


The DMS Pro, with its 500 g and the non-slip rubber handle, fits snugly and securely in your hand. This means you work ergonomically and prevent rapid fatigue.

**Consistent torque**

Thanks to the electronic shut-off, the DMS Pro turns off when the set torque is reached. You are therefore assured that every screw is connected with the same torque even if the battery is nearly flat.

**Illuminated screwing point**


The LED work light illuminates the work area of the DMS Pro and helps you to find screws faster and easier in dark areas.

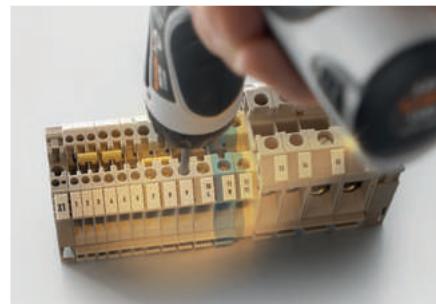

**Cordless torque screwdriver**

- One-hand operation under all working conditions
- Clockwise/anticlockwise rotation
- Two speeds: 200 and 600 rpm<sup>1</sup>
- Precise torque pre-selection in 21 steps
- High repeat accuracy
- Switch easily from straight to pistol grip
- Bit holder: 1/4" ball-bearing fixing mechanism (Form E6.3)
- Transport lock prevents accidental operation
- Simple switchover from battery to manual operation up to approx. 15 Nm
- LED work light
- Electronic shut-off clutch
- 1.5 Ah Li-Ion battery technology
- Ergonomic handle design

F

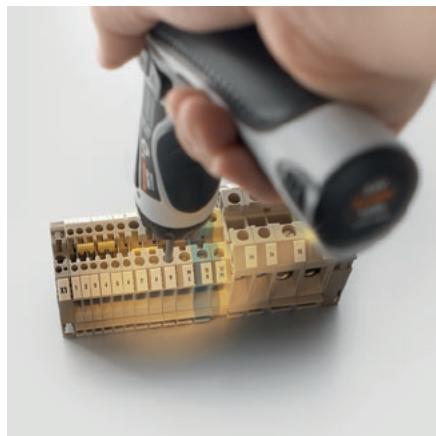**DMS PRO****DMS PRO SET****Technical data****Screwdriver**

Rated voltage

Idling speed

Max. coupling torque

Bit holder

Length

Weight

**Battery**

Rechargeable batteries

Battery voltage

**Charger**

Charger input

Charger output

Charging time

Weight

**Note****Ordering data****Version**

3.6 V			
200 u. 600 min <sup>-1</sup>			
3 Nm			
1/4" DIN 3126 Form E6.3			
500 g			
Li-Ion battery			
3.6 V			
AC 220-240V~50-60Hz 30W			
DC 2.8..6V; 4.8A / 30W max.			
30 min			
500 g			

Lev	LOW 200/min		HIGH 600/min	
	Nm	Lev	Nm	Lev
01	0.36	11	1.45	
02	0.46	12	1.55	
03	0.57	13	1.67	
04	0.66	14	1.78	
05	0.80	15	1.99	
06	0.87	16	2.14	
07	0.98	17	2.26	
08	1.10	18	2.41	
09	1.20	19	2.53	
10	1.36	20	2.67	
		21	2.83	

**Accessories**

Replacement battery	Type	Qty.	Order No.
	DMS PRO	1	1479120000
Charger	DMS PRO ZERT	1	1987840000

Note	Type	Qty.	Order No.
	AKKU DMS PRO	1	1479110000
	LG DMS PRO/DMS 3	1	9007460000

Type	Qty.	Order No.
DMS PRO SET (screwdriver incl. batterie, 1 additional battery, charger, bits, plastic carrying case)**	1	1479090000*
DMS PRO SET ZERT	1	1987830000

\* available in Europe

\*\* see picture

### Torque screwdriver with rechargeable battery

- One-hand operation under all working conditions
- Clockwise/anticlockwise
- Two speeds: 200 and 400 rpm<sup>1</sup>
- Precise torque pre-selection of approx. 0.3...3 Nm in 6 steps
- High reproducibility right up to complete discharge of the rechargeable battery
- Simple changeover from straight to pistol form
- Bit holder: 1/4" ball bearing fixing mechanism (form E6.3)
- Safety lock prevents unintentional activation
- Simple switchover from battery to manual operation up to 15 Nm

### DMS 3



### DMS 3 Set



### Technical data

#### Screwdriver

Rated voltage

Idling speed

Torque setting, max.

Bit holder

Length

Weight

#### Battery

Rechargeable batteries

Weight of rechargeable battery

#### Charger

Charger input

Charger output

Charging time

Weight of charger

#### Note

### Ordering data

#### Version

Type	Qty.	Order No.
DMS 3	1	9007440000
DMS 3 ZERT	1	9017870000
Incl. rechargeable battery		

#### Note

### Accessories

Replacement battery  
Charger

Type	Qty.	Order No.
AKKU DMS 3	1	9007450000
LG DMS PRO/DMS 3	1	9007460000
*) see picture		


#### Note

level	ca. Nm LOW	ca. Nm HIGH	level	ca. Nm LOW	ca. Nm HIGH
1	0.3	0.45	4	1.0	1.15
1.1	0.35	0.5	4.1	1.1	1.25
1.2	0.45	0.6	4.2	1.2	1.3
1.3	0.5	0.65	4.3	1.3	1.4
2	0.55	0.7	5	1.35	1.45
2.1	0.6	0.75	5.1	1.45	1.5
2.2	0.65	0.8	5.2	1.5	1.6
2.3	0.7	0.85	5.3	1.6	1.7
3	0.75	0.95	6	2.5	2.5
3.1	0.8	1.0			
3.2	0.85	1.0			
3.3	0.95	1.1			


Type	Qty.	Order No.
DMS 3 set 1 (screwdriver incl. batterie, charger, bits, plastic carrying case)*	1	9007470000
DMS 3 set 2 (as set 1, with 1 additional battery)	1	9007480000
Bit-Box DMS3	1	9024970000
DMS 3 set 1 Zert	1	9017450000
DMS 3 set 2 Zert	1	9017420000

**Bits drive 1/4" E6.3**

1/4" hexagon drive, acc. to DIN ISO 1173,  
shape E6.3 for direct machine connection  
(DMS2 1/4" E6.3)

**Bit E6.3 S**


Slotted bits DIN ISO 2380,  
1/4" drive E6.3 DIN ISO 1173



Type	Size / AF	a	b	c	Order No.
BIT E6.3 0.4X2.5X70		0.4	2.5	70	2748900000
BIT E6.3 0.5X3.0X70		0.5	3	70	2748910000
BIT E6.3 0.6X3.5X70		0.6	3.5	70	2748920000
BIT E6.3 0.8X4.0X70		0.8	4	70	2748930000
BIT E6.3 1.0X5.5X70		1	5.5	70	2748940000
BIT E6.3 1.2X6.5X70		1.2	6.5	70	2748950000
BIT E6.3 0.5X3.0X110		0.5	3	110	2749040000
BIT E6.3 0.6X3.5X110		0.6	3.5	110	2749050000
BIT E6.3 0.6X4.5X110		0.6	4.5	110	2749060000
BIT E6.3 0.8X4.0X110		0.8	4	110	2749070000
BIT E6.3 1.0X5.5X110		1	5.5	110	2749080000
BIT E6.3 1.2X6.5X110		1.2	6.5	110	2749090000

**Bit E6.3 PH**


Crosshead bits, Phillips-recess type PH/DIN ISO 8764.  
1/4" drive E6.3 DIN ISO 1173



BIT E6.3 PH1X70	1	70	2748980000
BIT E6.3 PH2X70	2	70	2748990000

**Bit E6.3 PZ**


Crosshead bits, Pozidrive type PZ/DIN ISO 8764,  
1/4" drive E 6.3 DIN ISO 1173



BIT E6.3 PZ1X70	1	70	2748960000
BIT E6.3 PZ2X70	2	70	2748970000

**Bit E6.3 Z**

Slotted bits with pilot tip,  
1/4" drive E6.3 DIN ISO 1173



BIT E6.3Z 0.6X3.5X70	0.6	3.5	70	2749100000
BIT E6.3 Z 0.8X4.0X39	0.8	4	39	2749030000

**Bit E6.3 T**


TRX bits,  
drive 1/4" E6.3 DIN ISO 1173



BIT E6.3 T15 X 70				2749000000
BIT E6.3 T20 X 70				2749010000
BIT E6.3 T20 X 150				2821510000
BIT E6.3 T40 X 70				2749020000

**Bits drive 1/4" E6.3**

1/4" hexagon drive, acc. to DIN ISO 1173,  
shape E6.3 for direct machine connection  
(DMS2 1/4" E6.3)

**BIT-BOX 11**

Weidmüller Bit Box, 9-piece with universal holder  
drive: 1/4" E6.3 DIN ISO 1173; output: 1/4" E6.3; bits: 1/4" C6.3



Type	Size / AF	a	b	c	Order No.
UBH 1/4" E6.3					
BIT C6,3 0,5x3,0x25	T10	0,5	3	25	
BIT C6,3 0,5x3,5x25	T15	0,5	3,5	25	
BIT C6,3 0,5x4,0x25	T20	0,5	4	25	
BIT C6,3 0,6x4,5x25	T25	0,6	4,5	25	
BIT C6,3 PH0x25	T30				25
BIT C6,3 PH1x25	T40				25
BIT C6,3 PH2x25	3				25
BIT C6,3 PZ0x25	4				25
BIT C6,3 PZ1x25	5				25
BIT C6,3 PZ2x25	6				25
BIT-BOX 11					2748110000

**BIT-BOX 11 TRX + IS**

UBH 1/4" E6.3					
BIT C 6,3 T10x25					
BIT C 6,3 T15x25					
BIT C 6,3 T20x25					
BIT C 6,3 T25x25					
BIT C 6,3 T30x25					
BIT C 6,3 T40x25					
BIT C 6,3 ISK3x25					
BIT C 6,3 ISK4x25					
BIT C 6,3 ISK5x25					
BIT C 6,3 ISK6x25					
BIT-BOX 11 TRX + IS					2937020000

**Bit holder**

Short universal bit holder, magnetic  
drive: 1/4" E6.3 DIN ISO 1173, output: 1/4" E6.3

**Bit holder**

UBH 1/4" E6.3

2748200000

**BSH 1/4**

Bit holder with flexible shank for reaching awkward screws, for all bits, output drive: 1/4"  
C6.3 DIN ISO 1173




BHS 1/4

2748120000

**Bits drive 1/4 E6.3**

1/4" hexagon drive, acc. to DIN ISO 1173,  
shape E6.3 for direct machine connection  
(DMS2 1/4" E6.3)

**SD BITHOLDER 1/4**

Bit holder with flexible shank for reaching awkward screws, for all bits, output drive: 1/4"  
C6.3 DIN ISO 1173

**SDQ T HANDLE BITHOLDER 1/4**

Bit holder with flexible shank for reaching awkward screws, for all bits, output drive: 1/4"  
C6.3 DIN ISO 1173

**Bits**

Bits C6.3 DIN ISO 1173 slot, PH, PZ



Type	Size / AF	a	b	c	Order No.
SD BITHOLDER 1/4					2888380000

SDQ T HANDLE BITHOLDER 1/4	129	2888370000
----------------------------	-----	------------

BIT C 6,3 0,5X3,0X25	0.5	3	25	2748860000
BIT C 6,3 0,5X3,5X25	0.5	3.5	25	2748870000
BIT C 6,3 0,5X4,0X25	0.5	4	25	2748880000
BIT C 6,3 0,8X5,5X25	0.8	5.5	25	2748890000
BIT C 6,3 PH0X25	0		25	2748140000
BIT C 6,3 PH1X25	1		25	2748150000
BIT C 6,3 PH2X25	2		25	2748160000
BIT C 6,3 PZ0X25	0		25	2748170000
BIT C 6,3 PZ1X25	1		25	2748180000
BIT C 6,3 PZ2X25	2		25	2748190000



# DMS manual / DMSI manual

## Torque screwdrivers with insulation up to 1,000 V (VDE) DMSI manual

The „DMSI manual“ with an integral window scale, combined with a Weidmüller 1,000 V insulated (VDE) interchangeable blade, ensures controlled tightening of screws and maximum reliability in electrical applications.

Every 1,000 V insulated (VDE) handle and blade is tested and provides the necessary safety up to 1,000 V AC / 1,500 V DC.



## F Torque screwdrivers DMSI manual

This is a versatile tool suitable for a variety of jobs, with an integral scale for easy reading of the torque value and a Weidmüller interchangeable blade.




### Each model is available with two torque ranges:

- 0.5 to 1.7 Nm
- 2.0 to 7.0 Nm
- setting tool included

### Advantages:

- Compact and especially lightweight design
- Torque set with special tool (included) to ensure the right setting
- Ergonomic handle size to match the torque range
- Every tool checked and given an ID No., 100 % quality control with verification and product reference
- Audible, unmistakable click upon reaching the torque, no unnecessary effort
- Interchangeable blade made from high-quality wear-resistant tool steel
- All tools comply with the accuracy stipulations of:  
EN ISO 6798, BS EN 26789, ASME B107.14M
- Operating accuracy:  $\pm 6\%$  of set scale value



**Uninsulated torque screwdrivers****DMS manual**

Torque screwdriver  
EN ISO 6798, BS EN 26789, ASME B107.14M

**WK S**

Interchangeable bits for torque screwdrivers  
Drive output acc. to DIN 5264, ISO 2380/1

**WK K PZ**

Interchangeable bits for torque screwdrivers  
Drive output acc. to DIN 5260-PZ, ISO 8764/1-PZ

**WK K PH**

Interchangeable bits for torque screwdrivers  
Drive output acc. to DIN 5260-PH, ISO 8764/1-PH

**WGK 1/4 C.6.3 E6.3**

Interchangeable bit with bit holder for torque screwdrivers  
Drive output: 1/4" C6.3 and 1/4" E6.3

Note: matching bits on page F.9



Type	Size / AF	a	b	c	Order No.
DMS MANUELL 0,5-1,7					9918370000
DMS MANUELL 2,0-7,0					9918380000


WK S 0,4X2,5	0.4	2.5	175	9918520000
WK S 0,5X3,0	0.5	3	175	9918530000
WK S 0,6X3,5	0.6	3.5	175	9918540000
WK S 0,8X4,0	0.8	4	175	9918550000
WK S 1,0X5,5	1	5.5	175	9918560000

WK K PZ0	175	9918600000
WK K PZ1	175	9918610000
WK K PZ2	175	9918620000

WK K PH0	175	9918570000
WK K PH1	175	9918580000
WK K PH2	175	9918590000

WK 1/4 C6,3 E6,3	9202510000
------------------	------------

## VDE-insulated torque screwdrivers



## VDE-insulated torque screwdrivers

VDE-insulated torque screwdriver  
EN ISO 6798, BS EN 26789, ASME B107.14M



Type	Size / AF	a	b	Order No.
DMSI MANUELL 0,5-1,7				9918390000
DMSI MANUELL 2,0-7,0				9918400000

## Bit holder



WK I SLIM BIT	2489300000
---------------	------------

## VDE slimBit Schlitz



WB SI SL 0,8X4,0	0.8	4	2433190000
WB SI SL 0,4X2,5	0.4	2.5	2433160000
WB SI SL 0,5X3,0	0.5	3	2433170000
WB SI SL 0,6X3,5	0.6	3.5	2433180000
WB SI SL 1,0X5,5	1	5.5	2433200000

## VDE slimBit Phillips



WB IK SL PH1	2433210000
WB IK SL PH2	2433220000

## VDE slimBit Pozidrive PZ



WB IK SL PZ1	2433230000
WB IK SL PZ2	2433240000

## VDE slimBit Torx



WB I T10	2506000000
WB I T15	2506010000
WB I T20	2506020000

## VDE slimBit Robertson



WB I VK 1	2506030000
WB I VK 2	2506040000

## VDE slimBit Hex



WB I SK 2,5	2506050000
WB I SK 3	2506060000
WB I SK 4	2506070000
WB I SK 5	2506080000





### The Torque Screwty®

- Easier work
- Screw-on circular plug, safety sealed

### The perfect tool for all situations

Screwy® is the ideal, universal tool for tightening and releasing cable glands on all common sensor and actuator cables. The Screwty® can also reach those round plugs normally considered inaccessible! No great force is required – simply turn the tool to tighten or release the plug-in connector as required.

The Screwty® also fits the majority (more than 90 %) of the cables and plug-in connectors of other suppliers and is therefore a unique tool useful throughout the world. The Screwty® consists of a handle with a conventional 1/4" fitting. This means it can be used for all sizes: for M12 and M8 round plugs, and the M12F and M8F types, also for plugs and sockets on custom cables.

The Screwty® is suitable for the following round plugs:

Size	M8	M8F	M12	M12F
	10 ±0,3 mm	11,9 ±0,3 mm	14,5 ±0,3 mm	19,8 ±0,3 mm
Thread	M8x1	M8x1	M12x1	M12x1


An adjustable torque fitting is also available for the Screwty® – for guaranteeing extra reliability during installation.

The torque can be infinitely adjusted between 0.5 and 1.7 Nm. This accurate setting enables all round plugs to be tightened precisely with a certain torque.

Weidmüller specifies the following torques for its round plugs:

Size	M8	M8F	M12	M12F
Torque	0,5-0,6 Nm	0,5-0,6 Nm	0,8-1,2 Nm	0,8-1,2 Nm
Thread	M8x1	M8x1	M12x1	M12x1

The Screwty® can also be fitted with other blades to create a torque screwdriver.

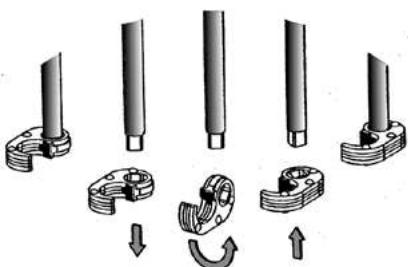

**Simply turn the ratchet to tighten or loosen the cable gland.**



1. Position Screwty®
2. Tighten connector
3. Finished!

Use of a M12 Screwty®



Use of a M23 Screwty®

**Screwy® standard****Ordering data**

Type	Use	Qty.	Order No.
Screwy® M12	moulded M12 lines	1	1900000000
Screwy® M8	moulded M8 lines	1	1900010000
Screwy® M12 F	M12 plugs for custom assembly	1	1900020000
Screwy® M8 F	M8 plugs for custom assembly	1	1900030000

**Screwy® Set****Ordering data**

Type	Qty.	Order No.
Screwy® Set	1	1910000000
<b>Fittings</b>		
Type	Contents	
Screwy® Set	1x Screwty® standard handle + 1 M12, M8, M12 F, M8 F attachments	

**Screwy® attachments****Ordering data**

Type	Qty.	Order No.
Screwy® M12 KO o. SD	1	1900100000
Screwy® M8 KO o. SD	1	1900110000
Screwy® M12F KO o. SD	1	1900120000
Screwy® M8F KO o. SD	1	1900130000
Screwy® M23 LS	1	1981560000

**Legend:**

F	for custom assemblies
DM	torque
KO o. SD	ratchet only (attachment)
Screwy®	screwdriver
Screwy® DM	torque screwdriver, interchangeable blade
WK	interchangeable blade
LS	power plug

**Screwy® with torque fitting**

Setting aid for Screwty® with torque fitting (included)

**Ordering data**

Type	Use	Qty.	Order No.
Screwy®-M12-DM	moulded M12 lines with torque requirement	1	1900001000
Screwy®-M8-DM	moulded M8 lines with torque requirement	1	1900011000
Screwy®-M12 F-DM	M12 plugs, custom assembly with torque requirement	1	1900021000
Screwy®-M8 F-DM	M8 plugs, custom assembly with torque requirement	1	1900031000

**Fittings**

Type	Contents
Screwy®-M12-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty® torque, 1 Screwty® M12 attachment
Screwy®-M8-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty® torque, 1 Screwty® M18 attachment
Screwy®-M12 F-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty® torque, 1 Screwty® M12 F attachment
Screwy®-M8 F-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty® torque, 1 Screwty® M18 F attachment

**Screwy® Set-DM****Ordering data**

Type	Qty.	Order No.
Screwy® Set-DM	1	1920000000
<b>Fittings</b>		
Type	Contents	
Screwy® Set-DM	1 interchangeable blade, 1 torque handle, 1 setting aid for Screwty® torque, 1 each of Screwty® M12, M8, M12 F, M8 F attachments	

**Screwy® interchangeable handle/interchangeable bit****Ordering data**

Type	Use	Qty.	Order No.
1/4" handle		1	4294820000
WK-1/4" (Screwy®)		1	1862200000

**Cable gland tools**

Screwing tool for all types of cable glands.

- Can tighten or loosen several rows of cable glands
- No deforming of the cable glands

**FleCaFix 11/24**

Cable gland tool



- Spanner size: SW 11 - SW 24
- Infinite adjustment of spanner size
- Ratchet function: not necessary to remove tool between turns
- Authentic one-hand tool

**FleCaFix 24/36**

Cable gland tool



- Spanner size: SW 24 - 36
- Infinite adjustment of spanner size
- Ratchet function: not necessary to remove tool between turns
- Authentic one-hand tool

F

**Technical data****Tool data**

Depth / Width / Height

Weight

AF size

**Note**

30 / 190 / 60 mm

190 g

11 - 24 mm

30 / 204 / 60 mm

240 g

24 - 36 mm

**Ordering data****Version**

Type	Qty.	Order No.
FLECAFIX 11/24	1	9015900000

Type	Qty.	Order No.
FLECAFIX 24/36	1	9015980000

**Note**

## Screwdriver with cutting and stripping adapter

- Stripping: PVC-insulated flexible and solid conductors up to 2.5 mm<sup>2</sup>
- Cutting: conductors solid up to 1.5 mm<sup>2</sup> and flexible 2.5 mm<sup>2</sup>

### swifty® CS



### swifty® CS set



#### swifty® CS

- Cable cutter and stripper which fits onto uninsulated screwdrivers, with a blade diameter of 3.5 mm
- Minimal hand force required
- Tool opens automatically
- Ergonomic handle design
- Excenter wheel to assist stripping function

#### swifty® CS set

- Logical operation
- Can be used for screw and tension clamp terminals
- Pocket format - always ready to hand
- Suitable for right- and left-hand use
- One-handed operation

## Technical data

### Max. stripping performance

Cable type

Line connection cross-section

### Cutting performance

Conductor cross-section (cutting capacity)

### Tool data

Depth / Width / Height

Weight

### Note

## Ordering data

### Version

Flexible and solid conductors with PVC insulation

2.5 mm<sup>2</sup>

### Cutting performance

2.5 mm<sup>2</sup>

18 / 40 / 40 mm

25 g

Type	Qty.	Order No.
SWIFTY CS	1	9006020000

### Note

Without screwdriver  
Available from summer 2025



Type	Qty.	Order No.
swifty® CS set (with screwdriver)	1	9006060000
Screwdriver (SDS 0.6X3.5X100 )	1	2749340000

Available from summer 2025

# SlimLine screwdrivers

## VDE insulated screwdriver with thin blade

The SlimLine screwdriver design allows you to reach deeply inset fittings and tension clamp terminals which cannot normally be reached using a standard VDE screwdriver. The SlimLine screwdrivers can be used for Weidmüller's Z-series of terminal blocks. The ergonomic grip design makes for a comfortable screwing process and excellent handling. The soft handle material prevents the tool from slipping away and thus makes higher torques possible.



### A blade that is up to 33 % thinner



The moulded protective insulation, applied directly to the shaft ensures safety and protection during critical applications at levels of up to 1,500 V (DC) or 1,000 V (AC).

### Ergonomic design



The ergonomic grip design makes for a comfortable screwing process and excellent handling. The soft handle material prevents slipping and thus makes higher torques possible.

### Security



The moulded protective insulation, applied directly to the shaft ensures safety and protection during critical applications at levels of up to 1,500 V (DC) or 1,000 V (AC).

**SlimLine screwdriver insulated acc. to VDE specs****SDIS SLIM**

VDE-insulated slotted screwdriver, SDI SL, ISO 2380, DIN EN ISO/IEC 60900,  
Output acc. to DIN ISO 2380

Type	Size / AF	a	b	c	Order No.
SDIS SLIM 0.6X3.5X100	0.6 3.5	100			2749610000
SDIS SLIM 0.8X4.0X100	0.8 4	100			2749620000
SDIS SLIM 1.0X5.5X125	1 5.5	125			2749630000
SDIS SLIM 1.2X6.5X150	1.2 6.5	150			2749640000

**SDIK SLIM PH**

VDE-insulated crosshead screwdriver, Phillips type, SDIK PH  
DIN EN ISO/IEC 60900, DIN ISO 8764/2-PH, output acc. to ISO 8764-PH

**SDIK SLIM PZ**

VDE-insulated slotted screwdriver, Type Pozidrive, DIN ISO 2380,  
Output acc. to DIN EN ISO/IEC 60900, ISO 2380/1

**SDIPM SLIM PZ**


VDE-insulated screwdriver, type PlusMinus, SDIPM SLIM PZ, DIN EN ISO/IEC 60900

**SDIT SLIM**

VDE-insulated TRX screwdriver, type TRX, SDIT SLIM, DIN EN ISO/IEC 60900



## SlimLine screwdriver insulated acc. to VDE specs

**SDI SET SLIM S3.5-6.5/PH1/2**

6-piece set: VDE-insulated slotted and crosshead PH screwdriver set, DIN EN ISO/IEC 60900, DIN ISO 2380, DIN ISO 8764



Type	Size / AF	a	b	c	Order No.
SDIS SLIM 0.6X3.5X100	0.6	3.5	100		
SDIS SLIM 0.8X4.0X100	0.8	4	100		
SDIS SLIM 1.0X5.5X125	1	5.5	125		
SDIS SLIM 1.2X6.5X150	1.2	6.5	150		
SDIK SLIM PH1 X 80	1		1	80	
SDIK SLIM PH2 X 100	2		2	100	
SDI SET SLIM S3.5-6.5/PH1/2					2749580000

**SDI SET SLIM S3.5-6.5/PZ1/2**

6-piece set: VDE-insulated slotted and crosshead PZ screwdriver set, DIN EN ISO/IEC 60900, DIN ISO 2380, DIN ISO 8764



SDIS SLIM 0.6X3.5X100	0.6	3.5	100	
SDIS SLIM 0.8X4.0X100	0.8	4	100	
SDIS SLIM 1.0X5.5X125	1	5.5	125	
SDIS SLIM 1.2X6.5X150	1.2	6.5	150	
SDIK SLIM PZ1 X 80	1		1	80
SDIK SLIM PZ2 X 100	2		2	100
SDI SET SLIM S3.5-6.5/PZ1/2				2749590000

**SDI SET SLIM T8/T9/T10/T15/T20/T25**

6-piece set: VDE-insulated TRX screwdriver set, DIN EN ISO/IEC 60900



SDIT T8 X 60	60		
SDIT T9 X 60	60		
SDIT SLIM T10 X 100	10	100	
SDIT SLIM T15 X 100	15	100	
SDIT SLIM T20 X 100	20	100	
SDIT SLIM T25 X 125	25	125	
SDI SET SLIM T8/T9/T10/T15/T20/T25			2749600000





# Screwdrivers

Weidmüller screwdrivers come in four different grip sizes, and are the result of a consistent grip concept which takes into account both the human hand and the different work requirements and conditions.

- Perfect handling with all grip sizes
- Maximum torques
- Optimum transmission of axial force
- Complete range including all commercial sizes



## Uninsulated screwdrivers



Weidmüller's uninsulated screwdrivers for use in dry conditions and for general applications offers customers a complete range of screwdrivers that enables far higher torques as well as substantially more comfort due to the soft material of the grip.

### Product benefits:

- Made of special soft material, which is kind to the skin, the handles enables maximum torques
- Perfect ergonomic grip design for comfortable screw driving and optimum handling
- You can choose from long-life extremely stressable blades in standard sizes
- ChromTop blade tip offers maximum corrosion protection and greatest possible dimensional accuracy of the blade geometry in the screw head over many years

## VDE-insulated screwdrivers




VDE-insulated screwdriver according to DIN EN 60900, IEC 900 for work on live equipment

### Product benefits:

- The protective insulation moulded directly on the screwdriver blade ensures electrical safety, even in critical applications
- Safe for working at up to 1,500 volts DC and 1,000 volts AC
- Each screwdriver is individually tested in a water bath at 10,000 volts according to DIN EN 60900
- Perfect ergonomic grip design for comfortable screw driving and optimum handling
- Made of special soft material, which is kind to the skin, the handles prevents slipping in critical situations and at the same time enables maximum torques

**VDE-insulated screwdriver**

VDE-insulated screwdriver, for working on live parts up to 1,000 V AC and 1,500 V DC. DIN EN ISO/IEC 60900, IEC 900, VDE GS tested. Each piece tested according to ISO 60900. Bit made of high-quality chrome-silicon vanadium steel, black finish.

**SDIS**

Slot-head screwdriver, insulated according to VDE spec., SDI DIN 7437, ISO 2380/2, drive output acc. to DIN EN ISO/IEC 60900 and DIN ISO 2380



Type	Size / AF	a	b	c	Order No.
SDIS 0.4X2.0X60	0.4	2	60		2749780000
SDIS 0.4X2.5X75	0.4	2.5	75		2749790000
SDIS 0.5X3.0X100	0.5	3	100		2749800000
SDIS 0.6X3.5X100	0.6	3.5	100		2749810000
SDIS 0.8X4.0X100	0.8	4	100		2749820000
SDIS 1.0X4.5X125	1	4.5	125		2749830000
SDIS 1.0X4.5X175	1	4.5	175		2749840000
SDIS 1.0X5.5X125	1	5.5	125		2749850000
SDIS 1.2X6.5X150	1.2	6.5	150		2749860000
SDIS 1.2X8.0X175	1.6	8	175		2749870000

**SDIK PH**

Phillips, crosshead screwdriver, insulated according to VDE spec. ISO 8764/2-PH, drive output acc. to ISO 8764-PH, DIN EN ISO/IEC 60900, DIN ISO 8764



SDIK PH0 X 60	0	60		2749880000
SDIK PH1 X 80	1	80		2749890000
SDIK PH2 X 100	2	100		2749900000
SDIK PH3 X 150	3	150		2749910000

**SDIK PZ**

Pozidriv, crosshead screwdriver, insulated according to VDE spec. ISO 8764/2-PZ, drive output acc. to ISO 8764-PZ, DIN EN ISO/IEC 60900, DIN ISO 8764



SDIK PZ1 X 80	1	80		2749920000
SDIK PZ2 X 100	2	100		2749930000

**SDIPM PH**

VDE-insulated plus-minus screwdriver, Phillips, SDIPM PH, DIN EN ISO/IEC 60900



SDIPM PH1 X 80	1	80		2749960000
SDIPM PH2 X 100	2	100		2749970000

**SDIPM PZ**


VDE-insulated plus-minus screwdriver, type Pozidriv, SDIPM PZ, DIN EN ISO/IEC 60900



SDIPM PZ1 X 80	1	80		2749940000
SDIPM PZ2 X 100	2	100		2749950000

**VDE-insulated screwdriver**

VDE-insulated screwdriver, for working on live parts up to 1,000 V AC and 1,500 V DC. DIN EN ISO/IEC 60900, IEC 900, VDE GS tested. Each piece tested according to ISO 60900. Bit made of high-quality chrome-silicon vanadium steel, black finish.

**SDIZ**

Slot-head screwdriver, insulated according to VDE spec., SDI DIN 7437, ISO 2380/2, drive output acc. to DIN EN ISO/IEC 60900 and ISO 2380



Type	Size / AF	a	b	c	Order No.
SDIZ 0.6X3.5X100	0.6	100			2749980000
SDIZ 0.8X4.0X100	0.8	100			2749990000

**SDIR**

VDE-insulated square drive screwdriver, type Robertson, SDIR, DIN EN ISO/IEC 60900



SDIR 1 X 80	1	80		2750020000
SDIR 2 X 100	2	100		2750030000

**SDIT**


VDE-insulated TRX screwdriver, type TRX, SDIT, DIN EN ISO/IEC 60900



SDIT T8 X 60	60		2750040000
SDIT T9 X 60	60		2750050000

**VDE-insulated screwdriver**

VDE-insulated screwdriver, for working on live parts up to 1,000 V AC and 1,500 V DC. DIN EN ISO/IEC 60900, IEC 900, VDE GS tested. Each piece tested according to ISO 60900.

**SDI SET S2.5-5.5/PH1/2**

6-piece set: VDE-insulated slotted and crosshead PH screwdriver set, DIN EN ISO/IEC 60900, DIN ISO 2380, DIN ISO 8764



Type	Size / AF	a	b	c	Order No.
SDIS 0.4X2.5X75	0.4	2.5	75		
SDIS 0.5X3.0X100	0.5	3	100		
SDIS 0.8X4.0X100	0.8	4	100		
SDIS 1.0X5.5X125	1	5.5	125		
SDIK PH1 X 80	1		1	80	
SDIK PH2 X 100	2		2	100	
SDI SET S2.5-5.5/PH1/2					2749750000

**SDI SET S2.5-5.5/PZ1/2**

6-teiliger Satz: VDE-isolierter Schlitz- und Kreuzschlitz-PZ-Schraubendreher-Satz, DIN EN ISO/IEC 60900, DIN ISO 2380, DIN ISO 8764



SDIS 0.4X2.5X75	0.4	2.5	75		
SDIS 0.5X3.0X100	0.5	3	100		
SDIS 0.8X4.0X100	0.8	4	100		
SDIS 1.0X5.5X125	1	5.5	125		
SDIK PZ1 X 80	1		1	80	
SDIK PZ2 X 100	2		2	100	
SDI SET S2.5-5.5/PZ1/2					2749760000

**SDI SET S2.0-5.5**


6-piece set: VDE-insulated slotted screwdriver set, DIN EN ISO/IEC 60900, DIN ISO 2380



SDIS 0.4X2.0X60	0.4	2	60		
SDIS 0.4X2.5X75	0.4	2.5	75		
SDIS 0.5X3.0X100	0.5	3	100		
SDIS 0.6X3.5X100	0.6	3.5	100		
SDIS 0.8X4.0X100	0.8	4	100		
SDIS 1.0X5.5X125	1	5.5	125		
SDI SET S2.0-5.5					2749770000

**VDE-insulated screwdriver**

VDE-insulated screwdriver, for working on live parts up to 1,000 V AC and 1,500 V DC. DIN EN ISO/IEC 60900, IEC 900, VDE GS tested. Each piece tested according to ISO 60900.

**SDI SET S2.5-5.5/PH1/2 VOLT**

7-piece set: VDE-insulated slotted and crosshead PH screwdriver set incl. voltage tester  
150-250V, DIN EN ISO/IEC 60900, DIN ISO 2380, DIN ISO 8764, VDE 0680 Part 6




Type	Size / AF	a	b	c	Order No.
SDIS 0.4X2.0X60	0.4	2	60		
SDIS 0.4X2.5X75	0.4	2.5	75		
SDIS 0.5X3.0X100	0.5	3	100		
SDIS 0.6X3.5X100	0.6	3.5	100		
SDIS 0.8X4.0X100	0.8	4	100		
SDIS 1.0X5.5X125	1	5.5	125		
SDI SET S2.5-5.5/PH1/2 VOLT					2854990000



**Uninsulated screwdriver**

Weidmüller screwdriver for general applications. Bit made of high-quality chrome-silicon vanadium steel, matt-chrome finish.

**SDS**

Slotted screwdriver with rounded blade, SD DIN 5265, DIN ISO 2380, drive output acc. to DIN 5264, DIN ISO 2380/1, ChromTop tip



Type	Size / AF	a	b	c	Order No.
SDS 0.4X2.0X60	0.4	2	60		2749260000
SDS 0.4X2.5X75	0.4	2.5	75		2749320000
SDS 0.5X3.0X80	0.5	3	80		2749330000
SDS 0.6X3.5X100	0.6	3.5	100		2749340000
SDS 0.6X3.5X200	0.6	3.5	200		2749350000
SDS 0.8X4.0X100	0.8	4	100		2749360000
SDS 0.8X4.5X125	0.8	4.5	125		2749370000
SDS 1.0X5.5X150	1	5.5	150		2749380000
SDS 1.2X6.5X150	1.2	6.5	150		2749390000

**SDK PH**

Crosshead screwdriver, Phillips, SDK PH DIN 5262, DIN ISO 8764-PH, drive output acc. to DIN ISO 8764-PH, chrome top tip



SDK PH0 X 60	60		2749400000
SDK PH1 X 80	1	80	2749410000
SDK PH2 X 100	2	100	2749420000
SDK PH3 X 150	3	150	2749430000

**SDK PZ**

Crosshead screwdriver, Pozidriv, SDK PZ DIN 5262, DIN ISO 8764-PZ, drive output acc. to DIN ISO 8764-PZ, chrome top tip



SDK PZ1 X 80	80		2749440000
SDK PZ2 X 100	100		2749450000
SDK PZ3 X 150	150		2749460000

**SD TR**

TRX TR-screwdriver with hole in tip of blade (tamper-resistant), SD TR for screwing TRX and TRX TR security screws (pin in centre of Torx® recess), ChromTop tip



SD T7 TR X 60	60		2749470000
SD T8 TR X 60	8	60	2749480000
SD T9 TR X 60	9	60	2749490000
SD T10 TR X 80	10	80	2749500000
SD T15 TR X 80		80	2749510000
SD T20 TR X 100		100	2749520000
SD T25 TR X 100		100	2749530000
SD T30 TR X 115		115	2749540000
SD T40 TR X 115		115	2749550000

**SD TO**

Angled slotted screwdriver with round handle




SD TO 0,4X2,5	0.4	2.5	70	2749570000
SD TO 0,6X3,0	0.6	3	70	2749560000

**Uninsulated screwdriver**

www.nortecnica.pt

**Uninsulated screwdriver**

Weidmüller screwdriver for general applications. Bit made of high-quality chrome-silicon vanadium steel, matt-chrome finish.

**SD SK**

Hexagon socket wrench external hexagon



Type	Size / AF	a	b	c	Order No.
SD SK 5,5X125				125	2898920000
SD SK 7,0X125				125	2898930000
SD SK 8,0X125				125	2898940000
SD SK 10X125				125	2898950000
SD SK 13X125				125	2898960000

**SD SET S2.5-5.5/PH1/2**

6-piece set: slotted and crosshead PH screwdriver set with circular blades, DIN ISO 2380 und DIN ISO 8764



SDS 0.4X2.5X75	0.4	2.5	75	
SDS 0.5X3.0X80	0.5	3	80	
SDS 0.8X4.0X100	0.8	4	100	
SDS 1.0X5.5X150	1	5.5	150	
SDK PH1 X 80		1	80	
SDK PH2 X 100		2	100	
SD SET S2.5-5.5/PH1/2				2749200000

F

**SD SET S2.0-5.5**

6-piece set: slotted screwdriver set, DIN ISO 2380



SDS 0.4X2.0X60	0.4	2	60	
SDS 0.4X2.5X75	0.4	2.5	75	
SDS 0.5X3.0X80	0.5	3	80	
SDS 0.6X3.5X100	0.6	3.5	100	
SDS 0.8X4.0X100	0.8	4	100	
SDS 1.0X5.5X150	1	5.5	150	
SD SET S2.0-5.5				2749220000

**SD Set T10/15/20/25/30/40 TR**

6-piece set: TRX TR screwdriver set




SD T10 TR X 80	10	80	
SD T15 TR X 80		80	
SD T20 TR X 100		100	
SD T25 TR X 100		100	
SD T30 TR X 115		115	
SD T40 TR X 115		115	
SD SET T10/15/20/25/30/40 TR			2749230000



**Uninsulated screwdriver**

Weidmüller screwdriver for general applications. Bit made of high-quality chrome-silicon vanadium steel, matt-chrome finish.

**SD SK SET 5.5-13x125**

Hexagon socket wrench external hexagon



Type	Size / AF	a	b	c	Order No.
SD SK SET 5.5-13x125					2898970000

**Uninsulated screwdriver**

www.nortecnica.pt

**Pico screwdriver****SD EL S PICO**

Weidmüller precision screwdriver, slotted



Type	Size / AF	a	b	c	Order No.
SD EL 0.3X1.5X40 PICO	0.3	1.5	40		2750060000
SD EL 0.4X2.0X60 PICO	0.4	2	60		2750070000
SD EL 0.4X2.5X75 PICO	0.4	2.5	75		2750080000
SD EL 0.5X3.0X75 PICO	0.5	3	75		2750090000
SD EL 0.6X3.5X60 PICO	6	35	60		2898980000
SD EL 0.6X3.5X100 PICO	0.6	3.5	100		2750100000
SD EL 0.8X4.0X100 PICO	0.8	4	100		2750110000

**SD EL PZ PICO**

Weidmüller precision screwdriver, cross recess type Pozidriv, PZ 8764



SDK EL PZ0 X 60 PICO	60	2750120000
SDK EL PZ1 X 80 PICO	1 80	2750130000

**SD EL PH PICO**

Weidmüller precision screwdriver, cross recess type Phillips, PH 8764

F



SDK EL PH0 X 60 PICO	0 60	2750140000
SDK EL PH1 X 80 PICO	1 80	2750150000

**SD EL SET 1.5-4.0/PH0/1**

7-piece set: Precision screwdriver slotted and cross-slotted PH



SD EL 0.3X1.5X40 PICO	0.3	1.5	40	
SD EL 0.4X2.0X60 PICO	0.4	2	60	
SD EL 0.4X2.5X75 PICO	0.4	2.5	75	
SD EL 0.5X3.0X75 PICO	0.5	3	75	
SD EL 0.8X4.0X100 PICO	0.8	4	100	
SDK EL PH0 X 60 PICO	0	60		
SDK EL PH1 X 80 PICO	1	80		
SD EL SET 1.5-4.0/PH0/1				2750160000

**Voltage tester**

Device for testing voltage conduction in electrical equipment and cables

**SD ELEC PRO**

Voltage tester

**SP 303**

Voltage tester



Type	Size / AF	a	b	c	Order No.
SD ELEC PRO		3	63		2855000000

SP 303	3	63	9006890000
--------	---	----	------------

**Weidmüller Allen key set**

Socket wrench manufactured from through-hardened chromium-vanadium steel, manufactured according to DIN ISO 2936 L (DIN 911), high-quality finished surface.

**SK WSD S**

9-piece offset Allen key set in the Prostar, with MagicRing: tightly holds standard screws in any position thanks to its spring steel ring (up to size 3), with ball head for screwing up to an angle of 25°.

**SK S**

7-piece Allen key set

**SK S MR**

7-piece Allen key set with ball head and MagicRing: holds standard screws (size 3 and larger) in any position thanks to its spring steel ring, with ball head for screwing up to an angle of 25°.

**TH S**

8-piece TRX TH Allen key set with hole in the bit tip (tamper-resistant), for screwing TRX and TRX TH security screws (pin in centre of Torx® recess)



Type	Size / AF	a	b	c	Order No.
	1.5				
	2				
	2.5				
	3				
	4				
	5				
	6				
	8				
SK WSD-S 1,5-10,0	10				9008850000

SKS 2,0-8,0	9008860000

SKS 2,0-8,0 MR	9008870000


TH-S 9-40	9008880000

**SDQ T Handle T15 / T20 / T25**


Socket wrench, TRX

**SDQ T Handle T27 / T30**

Socket wrench, TRX

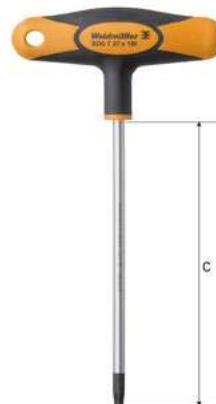**SDQ T HANDLE HEX 4 / HEX 5 / HEX 6**

Socket wrench, TRX

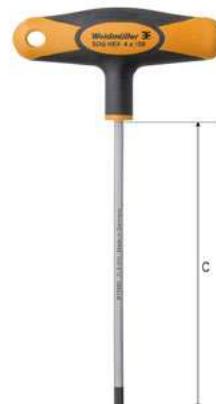

	<b>SDQ T15</b>	<b>SDQ T20</b>	<b>SDQ T25</b>
c	150 mm	150 mm	150 mm
Weight	46.4 GRM	49.3 GRM	54.5 GRM

**Ordering data**

Type	Qty.	Order No.
SDQ T HANDLE T15	1	<b>2888320000</b>
SDQ T HANDLE T20	1	<b>2888330000</b>
SDQ T HANDLE T25	1	<b>2888340000</b>

	<b>SDQ T27</b>	<b>SDQ T30</b>
c	150 mm	150 mm
Weight	61.8 GRM	73.9 GRM

**Ordering data**

Type	Qty.	Order No.
SDQ T HANDLE T27	1	<b>2888350000</b>
SDQ T HANDLE T30	1	<b>2888360000</b>

	<b>SDQ HEX 4</b>	<b>SDQ HEX 5</b>	<b>SDQ HEX 6</b>
c	150 mm	200 mm	200 mm
Weight	58.4 GRM	80 GRM	97.5 GRM

**Ordering data**

Type	Qty.	Order No.
SDQ T HANDLE HEX 4	1	<b>2888290000</b>
SDQ T HANDLE HEX 5	1	<b>2888300000</b>
SDQ T HANDLE HEX 6	1	<b>2888310000</b>

**IS 4 / IS 6**

Wrench with pegged pilot tip



Hexagon screwdriver with cross-grip made from high-quality plastic

- Nickel-plated surface
- Made from hardened chromium-vanadium steel
- Manufactured according to DIN 6911
- Designed for screws acc. to DIN 6912

**F****Cross-Key Master**

Universal key



1.0 x 7 mm + PH 2

5 mm □

7 mm □ 12 mm


8 mm □ 13.5 mm

9 mm ▲ 13.5 mm

4 mm □ 10 mm

**Cross-Key Universal**

Universal electrical cabinet key

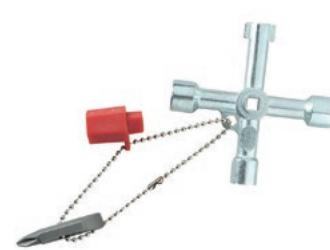

1.0 x 7 mm + PH 2

5 mm □

6 mm □ 11.5 mm

7-8 mm □ 13.5 mm

9 mm ▲ 13.5 mm

3-5 mm □ 9 mm

- With bit holder and reversible bit (drives - refer to symbols)
- Material: diecast zinc
- Dimensions: 62 x 90 mm

**Application:**

For almost all technical locking systems in buildings including: doors, window handles, radiator bleed valves, sanitary installations, HVAC, gas and water supply.

- With bit holder and reversible bit (drives - refer to symbols)
- Material: diecast zinc
- Dimensions: 72 x 72 mm

**Application:**

For locking systems used in electrical engineering, fits all standard electrical cabinet locks.

	<b>IS4</b>	<b>IS6</b>
c	60 mm	80 mm
Weight	27 g	61 g

	<b>CROSS-KEY MASTER</b>		
Width / Height	89 / 62 mm		
Weight	90 g		

	<b>CROSS-KEY UNIVERSAL</b>		
Width / Height	72 / 72 mm		
Weight	88 g		

**Ordering data**

Type	Qty.	Order No.
IS 4 DIN 6911	1	0485100000
IS 6 DIN 6911	1	0407900000

**Ordering data**


Type	Qty.	Order No.
CROSS-KEY MASTER	1	9918150000

**Ordering data**

Type	Qty.	Order No.
CROSS-KEY UNIVERSAL	1	9918130000

**Cross-Key Universal S**

Universal mini electrical cabinet key

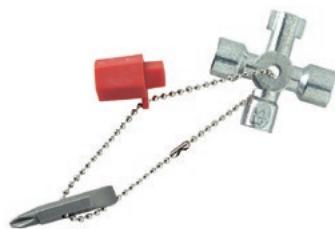

1.0 x 7 mm + PH 2

6 mm	—□—	11.5 mm	—△—	9 mm	—□—	13.5 mm
8 mm	—□—	13.5 mm	—□—	5 mm	—○—	9 mm

- With bit holder and reversible bit (drives - refer to symbols)
- Material: diecast zinc
- Dimensions: 42 x 42 mm

**Application:**

For locking systems used in electrical engineering, fits all standard electrical cabinet locks.

**Cross-Key Quadro**

5 mm	—□—	7 mm	—△—
6 mm	—□—	8-9 mm	—△—
7-8 mm	—□—	10-11 mm	—△—
9-10 mm	—□—	1/4" Bit	—○—
6 mm	—○—	3-5 mm	—○—

Suitable for all common technical closures. With its four-fold rotation mechanism, eight different panel closures can be brought into position. Chain and snap hook.

**Cross-Key Duo**

5 mm	—□—	5-6 mm	—△—
6-7 mm	—□—	6-7 mm	—△—
8-9 mm	—□—	8-9 mm	—△—
1/4"	—□—	2 x 1/4" Bit	—○—
3-5 mm	—○—		

Suitable for all common technical closures. Thanks to its dual rotation mechanism, eight different closures can be brought into position. There is also a 5 mm square and bit holder in the body.

CROSS-KEY UNIVERSAL S		
Width / Height	42 / 42 mm	
Weight	65 g	

**Ordering data**

Type	Qty.	Order No.
CROSS-KEY UNIVERSAL S	1	9918140000

CROSS-KEY QUADRO		
Width / Height	95 / 95 mm	
Weight	175 g	

**Ordering data**

Type	Qty.	Order No.
CROSS-KEY-QUADRO	1	1480180000

CROSS-KEY DUO		
Width / Height	95 / 38 mm	
Weight	85 g	

**Ordering data**

Type	Qty.	Order No.
CROSS-KEY-DUO	1	1480190000



# Measuring / Testing

<b>Measuring / Testing</b>		
Introduction	G.2	
Overview	G.4	
Digital voltage tester	G.6	
2-pole voltage tester	G.7	
Overview of digital multimeters	G.10	
Digital multimeters	G.11	
Digital multimeters / Digital clamp-on measuring device	G.12	
Accessories	G.13	
Cable tester	G.14	
Non-contact magnetic field and voltage tester	G.15	



# Test it – don't be shocked

## Working with our tool, that's the new rule.

### Professional testing tools that guarantee you never miss a fault

As a rule, test and measurement results must be determined one hundred percent correctly. We recommend our reliable testing and measuring tools for this purpose. In our complete range, you will find suitable products for every performance requirement and every application. From classic voltage testers to current measuring clamps to socket and FI testers.

During development and design, we take into account the wishes and experiences of our users. That's why the devices have a practical design and maximum reliability.

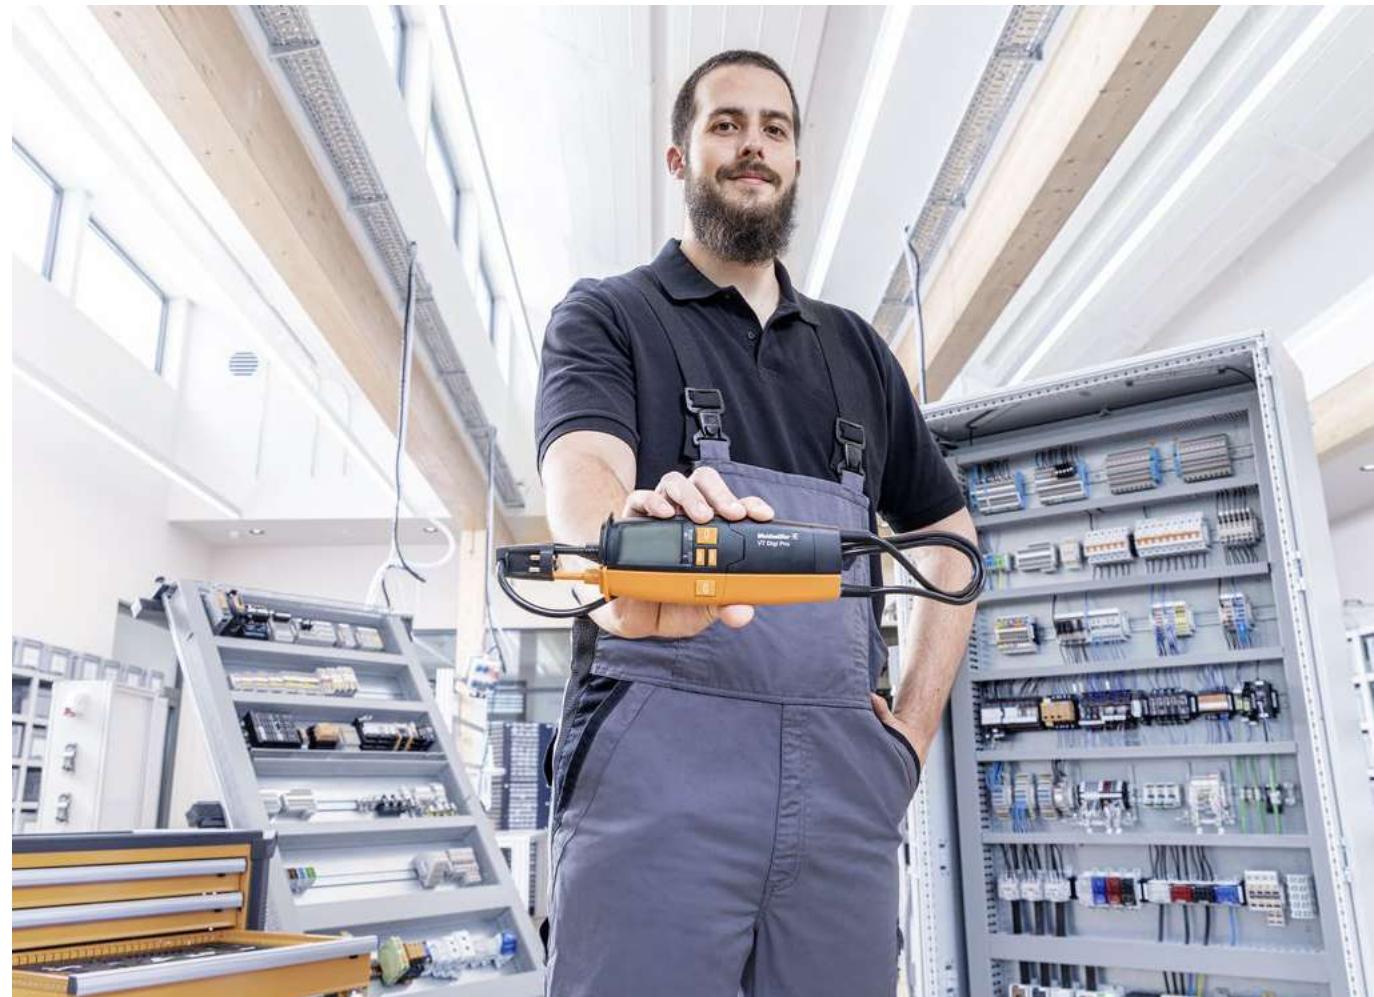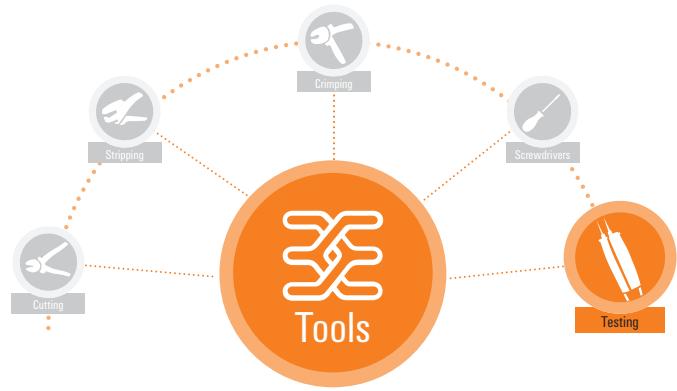

Testing plays a crucial role in setting up, maintaining and repairing electrical installations and devices. You should apply and adhere to the accident prevention and safety regulations relevant to your installation, which call for repeat tests after modifications and maintenance work, in addition to the tests required before using the installation for the first time.

The person responsible for setting up the installation is required to check that the installation or individual components function perfectly. They must also ensure their compliance with the technological regulations, in particular the VDE regulations and technical connection requirements (TAB) issued by the power supply companies. It is also important to check that all precautionary measures are taken to prevent extremely excessive contact voltage work and in order to guarantee and comply with the necessary safety standards. Using voltage and continuity testers from Weidmüller ensures that all tests are performed according to the relevant regulations.

Testing is very important during the setup, maintenance and repair of electrical facilities and equipment. You can conduct your tests properly with Weidmüller's voltage and continuity testers. All of our devices comply with all of the relevant standards.



G



#### 2-pole voltage testers

The main purpose of the voltage tester is to check the presence or absence of a voltage. The 2-pole voltage tester is an approved testing instrument that satisfies the requirements of the Industrial Safety Act.



#### Digital clamp-on meters

Digital clamp-on meters and clamp-on meter attachments and adapters are used for measuring AC and DC currents. The important advantage of these devices is that the measurements can be undertaken without interrupting the flow of current.



#### Digital multimeters

Multimeters are able to measure a number of different parameters. The measuring options for voltage and resistance, plus continuity testing and the diode test are available on every instrument as standard.



#### Network tester

Network testers enable you to make quick cabling tests and quick diagnoses of cabling errors.

### Overview of applications and testing functions

12 V	12 V voltage test - e.g. car batteries	400 V	400 V voltage test - 3-phase voltage systems	?	Semiconductor check
24 V	24 V voltage test - e.g. HGV batteries	3-48 V DC	3-48 V measuring range	? FI	Load connection
50 V	50 V – limit of the dangerous voltage range for the human body		Plug-in test probe	L3 L1 L2	Phase sequence check
120 V	120 V voltage test – customary voltage in some countries, e.g. USA		Car Check	?	Continuity check
230 V	230 V/240 V voltage test – customary voltage in the majority of European countries		Test probe illumination	- +	Polarity check

# Overview

## Technical specification

Type designation	VT Digi Pro	VT Combi Pro	VT Master	VT	VT CTB
Page number					
Order No.	9918870000	9918860000	9918880000	9918950000	9918970000
Rated voltage range AC	1 - 1.000V TRMS	6 - 690V	12 - 690V	12 - 690V	-
Rated voltage range DC	1 - 1.500V	6 - 690V	12 - 690V	12 - 690V	3 - 48V
Display	digital LCD	LED	LED	LED	LED
LED levels	-	6/12/24/50/120/230/400/690	12/24/50/120/230/400/690	12/24/50/120/230/400/690	
Frequency range	6 - 950 Hz	16 - 400 Hz	0 - 65 Hz	0 - 65 Hz	
Resistance measurement	0 ... 1999 Ω				
frequency measurement	1 ... 950 Hz				
Capacitance measurement	0.05 ... 1999 µF				
Continuity test with buzzer	0 ... 500 kΩ	0 ... 500 kΩ	0 ... 500 kΩ		
True RMS measurement method	TRUE RMS				
Diode testing	x				
Including bag	x				
Single-pole phase test	x	x	x		
One-hand testing	x	x	x	x	
Illuminated measuring probes	x	x			
HOLD function	x				
Phase sequence indicator	x	x			
Switchable load	x	x			
30 mA RCD triggering via a button	x	x			
Power supply	2 x 1,5 V AAA	2 x 1,5 V AAA	2 x 1,5 V AAA		
Order no., battery	9201310000	9201310000	9201310000		
Order no., case	2544760000	2544760000	2544760000	2544760000	
Order no., replacement measurement probes accessories	2565720000	2565720000	2565720000		

Safety features	CAT IV - 600 V CAT III - 1.000 V	CAT IV - 600 V CAT III - 690 V	CAT III - 600 V	
Peak resistance voltage	8 kV	8 kV	6 kV	5 kV
EN/IEC standard	DIN EN 61243-3: 2015-08	DIN EN 61243-3: 2015-08	DIN EN 61243-3: 2015-08	DIN EN 61243-3: 2015-08
Dimensions	264 x 67 x 33	264 x 67 x 33	235 x 60 x 28	210 x 55 x 21
Weight	295 g	288 g	181 g	115 g
Protection class	IP 65	IP 65	IP 54	IP 64
Operating temperature	-15 °C...+ 55 °C	-15 °C...+ 55 °C	-15 °C...+ 55 °C	+5 °C...+40 °C

VT Digi Pro



VT Combi Pro



VT Master



VT



VT CTB



**Digital voltage testers**

- LCD display including bar chart
- One-hand testing is possible
- Test probe protection
- Continuity test
- Low-battery indicator
- HOLD function
- Backlit
- Polarity detection
- Single-pole phase test is possible
- Incl. battery and bag
- Test probe illumination
- Large display
- Light sensor
- IP65

**VT Digi Pro****Digital voltage tester**

- TRMS
- Resistance measurement
- Capacitance measurement
- Frequency measurement
- Switchable load for Fl
- Rotating field display

**Technical data****Housing specification**

Nominal voltage
Input resistance, voltage
Peak voltage resistance
Frequency range
Measuring range category
Display
Working temperature
Protection degree
Approvals
Weight

**Note****VT Digi Pro**

1 V...1000 V AC / 1.500 V DC
On operating the double switch $\geq 300 \text{ k}\Omega$
8 kV
16...950 Hz
CAT III 1.000V / CAT IV 600V
LCD digital
-15...55 °C
IP65
IEC 61243-3:2014 (DIN EN 61243-3:2015-08)
295 g

**Buzzer included****Ordering data****Version**

Type	Qty.	Order No.
VT DIGI PRO	1	9918870000

**Note**

Protective case included

**Accessories**

Protective pouch
Test probe accessories

Type	Qty.	Order No.
SKAI TASCHE	1	2544760000
BATTERIE 1,5V MICRO	2	9201310000
2POL TESTER ZUB	1	2565720000

**Note**

## 2-pole voltage tester

- Automatic testing, identification and display of voltage type (AC or DC) and polarity
- Concisely arranged LED display
- Phase testing relative to earth
- Polarity testing
- Continuity and semiconductor testing
- Touch protection because of high input resistance
- Large voltage range

## VT Combi Pro

### 2-pole voltage tester



- Phase sequence indicator
- Single-pole phase testing
- Buzzer included
- Batteries included

## VT Master

### 2-pole voltage tester



- Buzzer included
- Battery included

## Technical data

### Housing specification

Nominal voltage
Input resistance, voltage
Peak voltage resistance
Frequency range
Measuring range category
Display
Working temperature
Protection degree
Approvals
Weight

### Note

## Ordering data

### Version

Type	Qty.	Order No.
VT COMBI PRO	1	9918860000

### Note

## Accessories

Protective pouch	Type	Qty.	Order No.
	SKAI TASCHE	1	2544760000
Test probe accessories	BATTERIE 1,5V MICRO	2	9201310000
	2POL TESTER ZUB	1	2565720000

### Note

### VT Combi Pro

6 V...690 V AC/DC
8 kV
16...400 Hz
CAT III - 690V/CAT IV - 600V
LED
-15...55 °C
IP65
IEC 61243-3:2014 (DIN EN 61243-3:2015-08)
290 g

### Note

### VT Master

12 V...690 V AC/DC
6 kV
0...65 Hz
CAT III 600 V
LED
-15...55 °C
IP54
IEC 61243-3:2014 (DIN EN 61243-3:2015-08)
181 g

### Note

## Type

Type	Qty.	Order No.
VT MASTER	1	9918880000

Protective pouch	Type	Qty.	Order No.
	SKAI TASCHE	1	2544760000
Test probe accessories	BATTERIE 1,5V MICRO	2	9201310000

Test probe accessories	Type	Qty.	Order No.
	SKAI TASCHE	1	2544760000
	BATTERIE 1,5V MICRO	2	9201310000



**2-pole voltage tester**

www.nortecnica.pt

**2-pole voltage tester****VT CTB****2-pole voltage tester for cars**

- Test probe
- Pin with sliding mechanism
- Cable length 130 cm
- Polarity detection

**VT****2-pole voltage tester**

- LED display for voltage and polarity
- Works without batteries
- Impact-resistant housing
- One-handed operation for sockets

**G****Technical data****Housing specification**

Nominal voltage

Input resistance, voltage

Peak voltage resistance

Frequency range

Display

Working temperature

Protection degree

Approvals

Weight

**Note****Ordering data****Version****VT CTB**

3 V DC...48 V DC

**Note****Accessories**

Protective pouch

**Note****VT**

12 V AC/DC...690 V AC/DC

5 kV

0...65 Hz

LED

-10...55 °C

IP64

EN/IEC 61010, EN 61243-3 2010

115 g

**Type****Qty.****Order No.**

VT CTB

1

9918970000

**Type****Qty.****Order No.**

VT

1

9918950000

**Type****Qty.****Order No.**

SKAI TASCHE

1

2544760000

**Type****Qty.****Order No.**

SKAI TASCHE

1

2544760000



# Overview of digital multimeters

## Technical data

	Temphaser	1037	C 2608
Page number	Page G.11	Page G.13	Page G.13
Order No.	<b>9427300000</b>	<b>9423580000</b>	<b>9427370000</b>
Measurement range			
• DC voltage	0.2 - 600 V	0.2 - 1,000 V	0.4 - 1,000 V
• AC voltage	0.2 - 600 V	0.2 - 750 V	0.4 - 750 V
• DC current			up to 1,500 A
• AC current		up to 200 A**	up to 2,000 A
• Resistance	up to 2,000 MΩ	up to 200 kΩ	up to 66 MΩ
• Capacitance	20 µF - 20 mF	up to 200 µF	1 nF - 6.6 mF
• Frequency	10 Hz - 40 kHz		0.1 - 400 kHz
• Temperature	-20 °C to +750 °C		
Continuity test	x	x	x
Diode test	x	x	x
Phase sequence test	x		
Selection of measuring range	manual	manual	automatic/manual
HOLD function		x	x
MAX/MIN function		x	x
PEAK measurement			x
Opening width of pliers		23 mm	57 mm
Standard	EN/IEC 61010-1	EN/IEC 61010-1	EN/IEC 61010-1
Measurement range category	CAT III 600 V	CAT III 1,000 V	CAT III 1,000 V
Dimensions in mm	147 x 70 x 39	214,5 x 66 x 44	277 x 102 x 49

## Accessories


	9 V battery	9 V battery	9 V battery
Order no., battery	<b>9004810000</b>	<b>9004810000</b>	<b>9004810000</b>
Accessories (included)	2 x Test wires with test probe  1 x Test wire with alligator clip  2 x Alligator clip  1 x Temperature probe  1 x Belt clip  1 x Spare fuse	2 x Test wires 2 x Short test probe 2 x Long test probe 2 x Test wire with alligator clip, thin 2 x Test wire with alligator clip, wide 1 x Pliers adapter 1 x Carry case	2 x Test wires with test probe  1 x Carry case
Order No.	<b>9205260000</b>	<b>9205460000</b>	<b>9205270000</b>
Accessories test wires (without temperature probe)		(without pliers adapter)	
**when connected with pliers adapter* acc. to EN 61243-3, in all low-voltage systems up to 1,000 V			

**Digital multimeters**

- Measures voltages up to 600 V
- Resistance measurement and semiconductor test
- Battery status display

**Temphaser****Temphaser**

- Voltage and resistance measurements
- Capacitance and frequency measurements
- Temperature measurement (including temp. probe)
- Phase sequence measurement

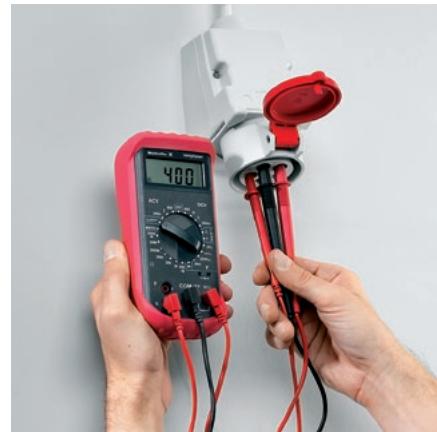**Technical data****Housing specification**

DC voltage measuring range

Resolution of DC voltage

AC voltage measuring range

Resolution of AC voltage

Resistance measuring range

Measured capacitance value

Frequency range

Temperature measuring range

Working temperature

Approvals

Weight

**Note****TEMPHASER**

0.2 - 600 V

0.2 - 600 V

0.2 Ω...2000 MΩ

20 µF...20 mF

10 Hz...40 kHz

-20...750

0...50 °C

EN/IEC 61010-1

340 g

**Ordering data****Version**

Type	Qty.	Order No.
TEMPHASER	1	9427300000

**Note****Accessories**

Type	Qty.	Order No.
ZUB TEMPHASER	1	9205260000
BLOCKBATTERIE 9V	1	9004810000

Delivered without temperature probe

**Note**

**Digital multimeters**

- Measures voltages up to 1000 V
- Resistance measurement and semiconductor test
- Capacitance measurement
- MAX/MIN memory
- HOLD function
- Battery status display
- Carry case included

**Multimeter 1037**

Digital multimeter



- Voltage measurement
- Current measurement
- Resistance measurement
- Non-contact voltage measurement is possible
- Extensive accessories

**Multimeter C 2608**

Digital clamp-on measuring device



- Currents up to 2000 A measurable with clamp-on attachment
- Frequency measurement
- Voltage measurement
- Current measurement
- PEAK function

**Technical data****Housing specification**

DC voltage measuring range

Resolution of DC voltage

AC voltage measuring range

Resolution of AC voltage

Measured current value, max.

Opening width of current-measuring clamp-on attachment

Resistance measuring range

Measured capacitance value

Frequency range

Temperature measuring range

Working temperature

Approvals

Weight

**Note****MULTIMETER 1037**

0,2 - 1000 V

0,2 - 750 V

200 A

23 mm

0,2 ... 200 kΩ

... 200 µF

50 Hz...500 Hz

0...50 °C

EN/IEC 61010-1

258 g

**MULTIMETER C 2608**

0,66 - 1000 V

± 0,5%

0,66 - 750 V

± 0,5%

2000 A

57 mm

660 Ω...66 MΩ

6,6 nF...6,6 mF

1 MHz...66 Hz

0...50 °C

EN/IEC 61010-1

570 g

**Ordering data****Version**

Type	Qty.	Order No.
MULTIMETER 1037	1	9423580000

**Note**

Type	Qty.	Order No.
ZUB MULT 1037	1	9205460000
BLOCKBATTERIE 9V	1	9004810000

Pliers adapter or carry case are not included in the delivery of accessories

**Accessories****Note**

Type	Qty.	Order No.
ZUB MULTIMETER	1	9205270000
BLOCKBATTERIE 9V	1	9004810000

Type	Qty.	Order No.
ZUB MULTIMETER	1	9205270000
BLOCKBATTERIE 9V	1	9004810000

No carry case

The accessories for our measuring instruments meet the same demanding standards for quality and safety as those used for our instruments.

**ZUB Tempphasor**

Included in delivery	Qty.	Order No.
Test wire with test probe	2	
Test wire with alligator clip	1	
Alligator clip	2	
ZUB TEMPHASER		9205260000

**ZUB Multimeter 1037**

Test wire	2	
Short test probe	2	
Long test probe	2	
Test wire with alligator clip, thin	2	
Test wire with alligator clip, wide	2	
ZUB MULTI 1037		9205460000

**PS ZQV test adapter**

PS ZQV set: test wire with test probe	2	
PS ZQV: test probe	2	
PS_ZQV_SET		1116710000
PS_ZQV		1121740000

**ZUB Multimeter**

Test wire with test probe	2	
ZUB MULTIMETER		9205270000

**SKAI pouch**

SKAI Pouch for 2-pole voltage tester	1	2544760000
Test probe	1	2565720000

**Cable tester**

www.nortecnica.pt

**Cable tester**

Test equipment to test Ethernet cables for:

- External voltage
- Cable breakage
- Wire breakage
- Short-circuit
- Crossed wires
- Checking for twisted wires
- Testable cable length: max. 1000 m
- Wire connection: RJ45
- External-voltage resistance: 80 V AC / DC

**LAN USB****LAN continuity tester****IE-CT**

- Network cable tester for LAN and USB connections
- Including remote tester
- Connection option for RJ45 plug
- Manual and automatic test
- Display of connection faults (cable breakage, wrong connection, incorrect wiring)

- External voltage
- External-voltage resistance: 80 V AC / DC

**Technical data****Housing specification**Display  
Testable cable length, max.

Supply

Type of connection

Remote box dimensions

Remote box weight

Depth / Width / Height

mm

Weight

Note

**LED**

1000

9V battery

RJ45, USB A, USB B

65 x 28 x 27 mm

30 g

65 / 135 / 27

174 g

**digital**

9V battery

/ 70 / 36

185 g

**Ordering data****Version**

Type	Qty.	Order No.
LAN USB TESTER	1	9205400000

Note

Battery, accessories and bag included in delivery

Type	Qty.	Order No.
IE-CT	1	8808420000

Further test boxes on request Battery included

## Non-contact voltage testers

## VT CL

Non-contact voltage tester



- Overvoltage category CAT IV 1000V
- Visible and acoustic voltage display
- Water-resistant and robust housing

## VT LCL

Non-contact voltage tester



- Overvoltage category CAT IV 1000V
- Visible and acoustic voltage display
- Integrated flashlight
- Two selectable voltage levels / sensitivity ranges
- Including battery monitoring

## Technical data

## Housing specification

Nominal voltage
Display
Protection degree
Measuring range category
Battery type
Approvals
Weight

## Note

## Ordering data

## Version

## Note

## Accessories

## Note

## VT CL

90 V AC..1000 V AC
Visual & acoustic
IP65
CAT IV 1000 V
1.5 V type AAA battery
DIN EN 61010-1, DIN EN 61326
60 g

12 V AC..1000 V AC
Visual & acoustic
IP65
CAT IV 1000 V
1.5 V type AAA battery
DIN EN 61010-1, DIN EN 61326
60 g

Type	Qty.	Order No.
VT CL	1	2436660000

Type	Qty.	Order No.
VT LCL	1	2436670000

## Type

BATTERIE 1,5V MICRO

2 9201310000

Type	Qty.	Order No.
BATTERIE 1,5V MICRO	2	9201310000

Type	Qty.	Order No.
BATTERIE 1,5V MICRO	2	9201310000

## Continuity testers and non-contact magnetic field testers

### VT M

Non-contact magnetic field tester



- Integrated flashlight
- Magnetic field displayed with a red LED
- Water-resistant and robust housing
- Including battery monitoring

### VT CTL

Continuity tester



- Flashlight function with continuous light
- Visual and acoustic feed-through
- Resistant to interference voltage

## Technical data

### Housing specification

Display
Protection degree
Battery type
Approvals
Weight
<b>Note</b>

### VT M

Visual & acoustic
IP65
1.5 V type AAA battery
DIN EN 61010-1, DIN EN 61326
60 g

### VT CTL

Visual & acoustic
IP44
1.5 V type AAA battery
DIN EN 61010-1

## Ordering data

### Version

Type	Qty.	Order No.
VT M	1	2436680000

Type	Qty.	Order No.
VT CTL	1	2436690000

### Note

Type	Qty.	Order No.
BATTERIE 1,5V MICRO	2	9201310000

Type	Qty.	Order No.
BATTERIE 1,5V MICRO	2	9201310000

## Accessories

### Note

Type	Qty.	Order No.
BATTERIE 1,5V MICRO	2	9201310000

# Tool sets

## Tool sets

Introduction	H.2
Tool Chest	H.4
Tool case	H.14
Crimp sets and accessories	H.35
Inserts	H.41
Assortment boxes and cases	H.43
Accessories for tool chest and tool cases	H.45


H

# Reach it – don't search for it

## Working with our tool, that's the new rule.

### Tool sets for cutting, stripping, and crimping wire-end ferrules to master every challenge

When you have countless challenges to master every day, every grip has to be right. With our tool sets, you are always perfectly organised. You immediately have the right tool at hand, shorten your preparation time and can do your work much more effectively. This saves a lot of time, money, and nerves. Benefit from the high quality, durability and functionality of our tools. No matter whether you are cutting, stripping, crimping or performing other everyday challenges.

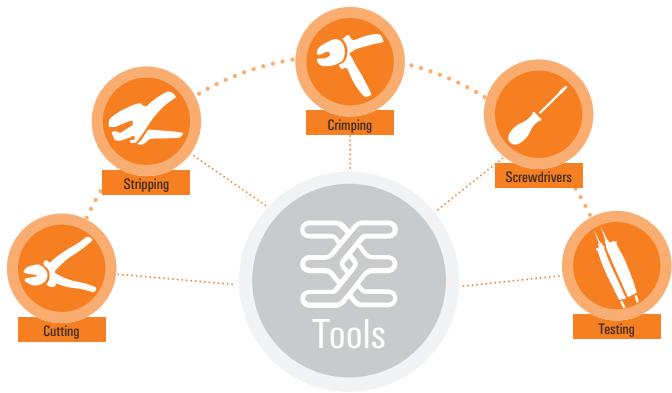

## Our easy to handle tool sets

The right selection of tools for every requirement. Our equipped tool bags are available in different versions:

- P BAG: 260 x170x50 mm
- P BAG XL: 320x220x50 mm
- Tool Bag: 400x280x50 mm

All bags are reinforced on the inside and have a robust zipper.



## Our comprehensive tool case

Both tool cases offer large storage room with enough space for further components and tools. The Pro Case is a soft case with an adjustable carry strap. It features an inside pocket for documents as well as various rubber brackets for separate tools. The two side pockets can be opened and offer a variety of brackets for stowing different tools. In addition, there are small velcro fastened pockets to offer simple storage.

The lockable hard sided suitcase, Top Case, is constructed from robust polypropylene with wheels as well as a sturdy and ergonomic two-component carry strap. The case is shock-resistant even under temperature fluctuations. The two suitcase shells are connected with hinges and meshed with an aluminium frame. The case provides additional space for stowing different tools. If the space should prove insufficient, each tool panel can be removed to increase the storage potential. Furthermore different separators in the bottom area ensure order and clarity.

H



# Organisation and efficiency in the workplace

## The Weidmüller tool chest with interchangeable tool inserts

Wiring a cabinet is a time consuming process, but a very important one. With the Weidmüller tool chest, tools and working materials can be organised optimally for quick and efficient access at any time. This saves time and reduces costs.

The Weidmüller tool chest combines the best quality with intelligent features, that incorporate foam inlays that are perfectly tailored to the drawers. Thanks to their three-part

division, individual drawer layouts fit together so that tools are sorted according to their application. A label next to each tool cavity indicates which tool belongs in the space, this allows quick identification should a tool be missing. The incorporated QR-code links directly to relevant information for the tool including helpful application videos found in the online catalogue.



### **H** Simple Expansion

Perforated side walls and an optional rear panel allow expansion of the storage possibilities thanks to standard accessories.

### Great flexibility

The three-part foam inserts enable application specific drawer layouts. The moulds of the tool inserts have a universal design making them suitable for different tools.

### Distinct labelling

Easy to read labels show the name and article number of the tool whilst indicating the correct cavity. A QR-code links to further information about the tool in the online catalogue.

### Your special advantages

- Three-part foam inserts with universal tool cavities for maximal flexibility
- Labelling fields with QR-codes for quick identification of missing tools
- Standard accessories allow easy expansion



**TOOL CHEST SET****TC INL BIG 1****Assembly**

Description of article	Type	Qty.
Tool chest empty	TOOL CHEST	1
Foam inlay universal big	TC INL BIG 1	1
Foam inlay 16 mm <sup>2</sup> + CST	TC INL THIRD 1	1
Foam inlay pliers	TC INL THIRD 2	1
Foam inlay 50 mm <sup>2</sup>	TC INL THIRD 3	1
Foam inlay screwdrivers	TC INL THIRD 4	1
Foam inlay wrenches	TC INL THIRD 5	1
Foam inlay socket set	TC INL THIRD 6	1
Foam inlay tester	TC INL THIRD 7	1
Foam inlay multimeter	TC INL THIRD 8	1
Foam inlay clamp meter	TC INL THIRD 9	1

**Assembly**

Description of article	Type	Qty.
Folding Ruler	FOLDING RULER	1
Combined cutting/screwing tool	SWIFTY SET	1
VDE-insulated long-nose pliers with cutter, 200 mm long	FRZ S 200	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 6 ROTO L	1
Crimping tool for insulated connectors, 0,5-6 mm <sup>2</sup>	CTI 6	1
Elektronik diagonal-cutting pliers	SUPER CUT	1
Sheathing strippers	AM 16	1
Tape measure	FLEXIMET 5 M	1
Lock-blade knife with plastic handle	SLICER 1K	1
Mains-operated torque screwdriver with 1/4" drive	DMS PRO	1
Battery for DMS PRO	AKKU DMS PRO	1
Angled slotted screwdriver, 0.6 x 3.0	SD TO 0,6X3,0	1
Bit with slotted blade 0.4 x 2.5 x 70	BIT E6,3 0,4X2,5X70	5
Bit with slotted blade 0.4 x 2.5 x 70	BIT E6,3 0,6X3,5X70	5
Bit with slotted blade 0.4 x 2.5 x 70	BIT E6,3 1,0X5,5X70	5
Bit with crosshead, Pozidrive size 1	BIT E6,3 P21X70	5
Bit with crosshead, Pozidrive size 2	BIT E6,3 P22X70	5
Bit with T15	BIT E6,3 T15 X 70	5
Bit with T20	BIT E6,3 T20 X 70	5
Bit with T40	BIT E6,3 T40 X 70	5

**Technical data**

Depth / Width / Height	525 / 894 / 928 mm
Weight	85500 GRM

**Ordering data**

Type	Qty.	Order No.
TOOL CHEST SET	1	2709760000
TOOL CHEST	1	2683640000

**Technical data**

Depth / Width / Height	447 / 600 / 50 mm
Weight	3393.28 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL BIG 1	1	2683720000
TC INL BIG 1 EMPTY	1	2683730000

**TC INL THIRD 1****Assembly**

Description of article	Type	Qty.
Stripping tool for up to 16 mm <sup>2</sup>	STRIPAX 16	1
Crimping tool	PZ 16	1
Stripping Tool	CST	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Cutter cassette for CST, 3-part, length 7.5mm, 3.5mm	MEKA BR CST	1
Cutter cassette for CST, 2-part, length 6.0mm	MEKA RT CST	1
Cutter cassette for CST, 2-part, length 6.5mm	MEKA BL CST	1

**TC INL THIRD 2****Assembly**

Description of article	Type	Qty.
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated heavy-duty diagonal-cutting pliers, 160 mm long	SE HD 160	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Screwing tool	SK WSD-S 1,5-10,0	1

**Technical data**

Depth / Width / Height	447 / 200 / 50 mm
Weight	384.4 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 1	1	2683740000
TC INL THIRD 1 EMPTY	1	2683750000

**Technical data**


Depth / Width / Height	447 / 200 / 50 mm
Weight	262.6 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 2	1	2683760000
TC INL THIRD 2 EMPTY	1	2683770000

**TC INL THIRD 3****Assembly**

Description of article	Type	Qty.
Cutting tool for up to 22 mm outside diameter	KT 22	1
Crimping tool	PZ 50	1
Sheathing strippers	AM 25	1
Sheathing stripper for up to 35mm outer diameter	AM 35	1

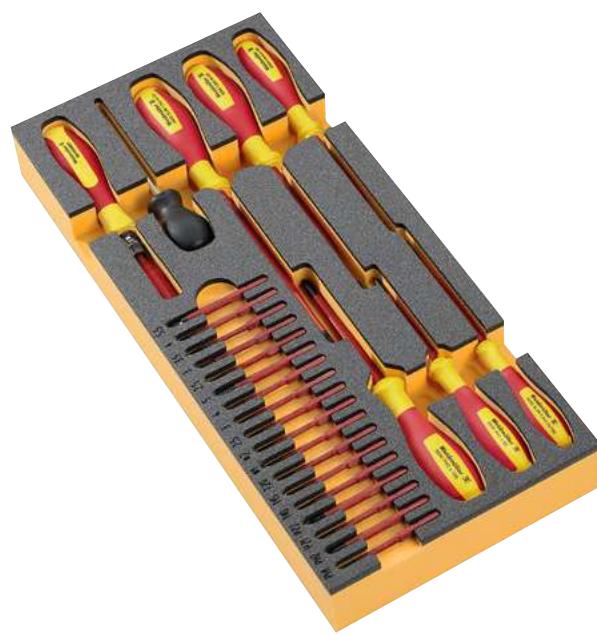**TC INL THIRD 4****Assembly**

Description of article	Type	Qty.
VDE-insulated torque screwdriver, 0.5-1.7 Nm	DMSI MANUELL 0,5-1,7	1
VDE-insulated interchangeable bit for slotted screws, size 0.4 x 2.5	WB SI SL 0,4X2,5	1
VDE-insulated interchangeable bit for slotted screws, size 0.5 x 3	WB SI SL 0,5X3,0	1
VDE-insulated interchangeable bit for slotted screws size 0.6 x 3.5	WB SI SL 0,6X3,5	1
VDE-insulated interchangeable bit for slotted screws, size 0.8 x 4	WB SI SL 0,8X4,0	1
VDE-insulated interchangeable bit for slotted screws, size 1 x 5.5	WB SI SL 1,0X5,5	1
VDE insulated interchangeable bit for crosshead screws, Pozidrive, size 1	WB IK SL PZ1	1
VDE insulated interchangeable bit for crosshead screws, Pozidrive, size 2	WB IK SL PZ2	1
VDE insulated interchangeable blade for hexagonal head screws	WB I SK 2,5	1
VDE insulated interchangeable blade for hexagonal head screws	WB I SK 3	1
VDE insulated interchangeable blade for hexagonal head screws	WB I SK 4	1
VDE insulated interchangeable blade for hexagonal head screws	WB I SK 5	1
VDE insulated interchangeable bit for crosshead screws, Phillips head, size 1	WB IK SL PH1	1
VDE insulated interchangeable bit for crosshead screws, Phillips head, size 2	WB IK SL PH2	1
VDE insulated interchangeable blade for Torx® screws	WB I T10	1
VDE insulated interchangeable blade for Torx® screws	WB I T15	1
VDE insulated interchangeable blade for Torx® screws	WB I T20	1
VDE insulated interchangeable blade for square head screws	WB I VK 1	1
VDE insulated interchangeable blade for square head screws	WB I VK 2	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1

**Technical data**

Depth / Width / Height	447 / 200 / 50 mm
Weight	1729 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 3	1	2683780000
TC INL THIRD 3 EMPTY	1	2683790000

**Technical data**

Depth / Width / Height	447 / 200 / 50 mm
Weight	1002.2 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 4	1	2683800000
TC INL THIRD 4 EMPTY	1	2683810000

**TC INL THIRD 5****Assembly**

Description of article	Type	Qty.
Ring spanner set	PACK HEXA 8-13	1
Wrench Set	WRENCH SET	1

**TC INL THIRD 6****Assembly**

Description of article	Type	Qty.
Screwed gland tool for M8-, M12-cables and connectors	SCREWTY SET	1
Cable gland tool, 11-24 AF	FLECAFIX 11/24	1
Cable gland tool, 24-36 AF	FLECAFIX 24/36	1
Socket Set	SOCKET SET	1

**Technical data**

Depth / Width / Height	447 / 200 / 50 mm
Weight	1613.92 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 5	1	2683820000
TC INL THIRD 5 EMPTY	1	2683830000

**Technical data**

Depth / Width / Height	447 / 200 / 50 mm
Weight	1259 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 6	1	2683840000
TC INL THIRD 6 EMPTY	1	2683850000

**TC INL THIRD 7****Assembly**

Description of article	Type	Qty.
Non-contact magnetic field tester	VT M	1
Non-contact voltage tester	VT LCL	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1

**TC INL THIRD 8****Assembly**

Description of article	Type	Qty.
Measurement device set V, A, Ω, F, Hz, °C, °F	TEMPHASER	1

**Technical data**

Depth / Width / Height	447 / 200 / 50 mm
Weight	528 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 7	1	2683860000
TC INL THIRD 7 EMPTY	1	2683870000

**Technical data**

Depth / Width / Height	447 / 200 / 50 mm
Weight	675 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 8	1	2683880000
TC INL THIRD 8 EMPTY	1	2683890000

**TC INL THIRD 9****Assembly**

Description of article	Type	Qty.
Digital clamp-on measuring device	MULTIMETER C 2608	1

**H****TC INL THIRD 10****Assembly**

Description of article	Type	Qty.
Allen Key, T15	SDQ T HANDLE T15	1
Allen Key, T20	SDQ T HANDLE T20	1
Allen Key, T25	SDQ T HANDLE T25	1
Allen Key, T27	SDQ T HANDLE T27	1
Allen Key, T30	SDQ T HANDLE T30	1
Screwdriver, TR 8	SD T8 TR X 60	1
Screwdriver, TR 9	SD T9 TR X 60	1
Screwdriver, TR 10	SD T10 TR X 80	1

**Technical data**

Depth / Width / Height	447 / 200 / 50 mm
Weight	970.4 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 9	1	2683900000
TC INL THIRD 9 EMPTY	1	2683910000

**Technical data**

Depth / Width / Height	5 / 20 / 45 mm
Weight	532.07 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 10	1	2929300000
TC INL THIRD 10 EMPTY	1	2941280000

## TC INL THIRD 11



## Assembly

Description of article	Type	Qty.
Allen Key, Hex 4	SDQ T HANDLE HEX 4	1
Allen Key, Hex 5	SDQ T HANDLE HEX 5	1
Allen Key, Hex 6	SDQ T HANDLE HEX 6	1
Bitholder 1/4	SDQ T HANDLE BITHOLDER 1/4	1
Screwdriver Bitholder	SD BITHOLDER 1/4	1
Bit with slotted blade, 0,5 x 3,0 x 25	BIT C 6,3 0,5X3,0X25	5
Bit with slotted blade, 0,5 x 3,5 x 25	BIT C 6,3 0,5X3,5X25	5
Bit with slotted blade, 0,5 x 4,0 x 25	BIT C 6,3 0,5X4,0X25	5
Bit with slotted blade, 0,8 x 5,5 x 25	BIT C 6,3 0,8X5,5X25	5
Bit with crosshead, Phillips size 0	BIT C 6,3 PHOX25	5
Bit with crosshead, Phillips size 1	BIT C 6,3 PH1X25	5
Bit with crosshead, Phillips size 2	BIT C 6,3 PH2X25	5
Bit with crosshead, Pozidrive size 0	BIT C 6,3 PZ0X25	5
Bit with crosshead, Pozidrive size 1	BIT C 6,3 PZ1X25	5
Bit with crosshead, Pozidrive size 2	BIT C 6,3 PZ2X25	5
Bitholder 1/4	UBH 1/4 E6,3	5

## TC INL THIRD 12



## Assembly

Description of article	Type	Qty.
Hammer	HAMMER	1
Hammer	SOFT FACE HAMMER	1
Water Pump Pliers	WPZ 250	1
VDE-insulated heavy-duty diagonal-cutting pliers, 160 mm long	KSE 160	1

## Technical data

Depth / Width / Height	5 / 20 / 45 mm
Weight	817.09 GRM

## Ordering data

Type	Qty.	Order No.
TC INL THIRD 11	1	2929310000
TC INL THIRD 11 EMPTY	1	2941290000

## Technical data

Depth / Width / Height	5 / 20 / 45 mm
Weight	970 GRM

## Ordering data

Type	Qty.	Order No.
TC INL THIRD 12	1	2929320000
TC INL THIRD 12 EMPTY	1	2941310000

**TC INL THIRD 13****Assembly**

Description of article	Type	Qty.
Folding Ruler	FOLDING RULER	1
Spirit Level	SPIRIT LEVEL	1
Ruler	STEEL SCALE 300MM	1
Angle	ADJUSTABLE SQUARE	1
Tape measure	FLEXIMET 5 M	1
Centre punch	AUTOMATIC CENTRE PUNCH	1

**H****Technical data**

Depth / Width / Height	5 / 20 / 45 mm
Weight	988.4 GRM

**Ordering data**

Type	Qty.	Order No.
TC INL THIRD 13	1	2929330000
TC INL THIRD 13 EMPTY	1	2941320000

# Weidmüller tool chest accessories

## Additional equipment for individual applications



### Perforated wall

Optional perforated rear wall made of sheet steel with square perforation 10 x 10 mm.  
Outside dimensions 640 x 660 mm.



### Container strip

Additional container strip made of sheet steel with safety angle and a capacity of up to 15 kg.  
For mounting onto perforated wall.



### Side shelf

Provides additional working space of 380 x 310 mm incl. non slip mat.



### Paper roll holder

The paper roll holder offers space for roles with diameter of 400 mm and a length of 360 mm.



### Spray can holder

The optional spray can holder has a height of 70 mm and a width of 380 mm.



### Waste bin

An additional waste bin allows cleanliness at your workplace with a 14 liter capacity.



### TFT-monitor holder

To include flat screens with VESA-base plate. 75 x 75 mm or 100 x 100 mm perforations. The holder allows a stepless inclination of the monitor.  
For mounting onto container strip.



### Foam inserts free cavity

If, in addition to Weidmüller tools, other objects and small parts need to be stored in a non-slip and tidy manner, the Weidmüller foam inserts with 1, 2 or 3 free spaces are the ideal addition. With the same dimensions as the other inserts, they fit perfect into the overall picture.

### Accessories tool chest

Type	Description of article	Qty.	Order No.
TC LORW	Perforated wall	1	2683650000
TC BHLE	Container strip	1	2683660000
TC ZUAL	Side shelf	1	2683670000
TC PRHA	Paper roll holder	1	2683680000
TC SDHA	Spray can holder	1	2683690000
TC ABFBH	Waste bin	1	2683700000
TC TFTHA VESA	TFT-monitor holder	1	2938110000
TC INL THIRD EMTPY 1 FIELD	Foam insert 1 field	1	2683940000
TC INL THIRD EMTPY 2 FIELDS	Foam insert 2 fields	1	2683950000
TC INL THIRD EMTPY 3 FIELDS	Foam insert 3 fields	1	2683960000

**PRO CASE STARTER****Assembly**

Description of article	Type	Qty.
Toolbox, empty	PRO CASE LEER	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Screwing tool	SK WSD-S 1,5-10,0	1
Non-contact voltage tester	VT LCL	1
Voltage tester up to 690 V / 100 Hz LED	VT MASTER	1
Folding Ruler	FOLDING RULER	1
Screwdriver VDE SET + Volttester	SDI SET S2.5-5.5/PH1/2 VOLT	1
Lock-blade knife with plastic handle	SLICER 1K	1
Spirit Level	SPIRIT LEVEL	1

**TOP CASE STARTER****Assembly**

Description of article	Type	Qty.
Toolbox, empty	TOP CASE	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Screwing tool	SK WSD-S 1,5-10,0	1
Non-contact voltage tester	VT LCL	1
Voltage tester up to 690 V / 100 Hz LED	VT MASTER	1
Folding Ruler	FOLDING RULER	1
Screwdriver VDE SET + Volttester	SDI SET S2.5-5.5/PH1/2 VOLT	1
Lock-blade knife with plastic handle	SLICER 1K	1
Spirit Level	SPIRIT LEVEL	1

**Technical data**

Depth / Width / Height	170 / 480 / 400 mm
Weight	5042 GRM

**Ordering data**

Type	Qty.	Order No.
PRO CASE STARTER	1	2903550000

**Technical data**

Depth / Width / Height	352 / 465 / 255 mm
Weight	8352.08 GRM

**Ordering data**

Type	Qty.	Order No.
TOP CASE STARTER	1	2903540000

**PRO CASE PLUS****TOP CASE PLUS****Assembly**

Description of article	Type	Qty.
Toolbox, empty	PRO CASE LEER	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Screwing tool	SK WSD-S 1,5-10,0	1
Non-contact voltage tester	VT LCL	1
Voltage tester up to 690 V / 100 Hz LED	VT COMBI PRO	1
Folding Ruler	FOLDING RULER	1
Screwdriver VDE SET + Volttester	SDI SET S2.5-5.5/PH1/2 VOLT	1
Lock-blade knife with plastic handle	SLICER 1K	1
Spirit Level	SPIRIT LEVEL	1
Sheathing strippers	AM 25	1
Water Pump Pliers	WPZ 250	1
Continuity testers	VT CTL	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Crimping tool	PZ 10 HEX	1
Hammer	HAMMER	1
Hacksaw	PUK HACKSAW	1

**Assembly**

Description of article	Type	Qty.
Toolbox, empty	TOP CASE	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Screwing tool	SK WSD-S 1,5-10,0	1
Non-contact voltage tester	VT LCL	1
Voltage tester up to 690 V / 100 Hz LED	VT COMBI PRO	1
Folding Ruler	FOLDING RULER	1
Screwdriver VDE SET + Volttester	SDI SET S2.5-5.5/PH1/2 VOLT	1
Lock-blade knife with plastic handle	SLICER 1K	1
Spirit Level	SPIRIT LEVEL	1
Sheathing strippers	AM 25	1
Water Pump Pliers	WPZ 250	1
Continuity testers	VT CTL	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Crimping tool	PZ 10 HEX	1
Hammer	HAMMER	1
Hacksaw	PUK HACKSAW	1

**Technical data**

Depth / Width / Height	170 / 480 / 400 mm
Weight	8816 GRM

**Ordering data**

Type	Qty.	Order No.
PRO CASE PLUS	1	2903570000

**Technical data**

Depth / Width / Height	352 / 465 / 255 mm
Weight	9911 GRM

**Ordering data**

Type	Qty.	Order No.
TOP CASE PLUS	1	2903560000

**PRO CASE ULTIMATE****Assembly**

Description of article	Type	Qty.
Toolbox, empty	PRO CASE LEER	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Screwing tool	SK WSD-S 1,5-10,0	1
Non-contact voltage tester	VT LCL	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Folding Ruler	FOLDING RULER	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Lock-blade knife with plastic handle	SLICER 1K	1
Sheathing strippers	AM 25	1
Water Pump Pliers	WPZ 250	1
Continuity testers	VT CTL	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Crimping tool	PZ 10 HEX	1
Screwdriver Voltagetester	SD ELEC PRO	1
Tape measure	FLEXIMET 5 M	1
Wire-end ferrule box	H-BOX 0,5-2,50MM DIN	1
Stripping tool for up to 16 mm <sup>2</sup>	STRIPAX 16	1
Sheathing stripper for UTP and STP data cables	AM 12	1
Crimping tool	PZ 16	1
Screwdriver set	SD SET T10/15/20/25/30/40 TR	1
Screwing tool	BIT-BOX 11	1
Screwdriver Bitholder	SD BITHOLDER 1/4	1
Spirit Level	SPIRIT LEVEL	1
Hacksaw	PUK HACKSAW	1

**Technical data**

Depth / Width / Height	170 / 480 / 400 mm
Weight	7165 GRM

**Ordering data**

Type	Qty.	Order No.
PRO CASE ULTIMATE	1	2903590000

**TOP CASE ULTIMATE****Assembly**

Description of article	Type	Qty.
Toolbox, empty	TOP CASE	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Screwing tool	SK WSD-S 1,5-10,0	1
Non-contact voltage tester	VT LCL	1
Voltage tester up to 690 V / 100 Hz LED	VT MASTER	1
Folding Ruler	FOLDING RULER	1
Screwdriver VDE SET + Volttester	SDI SET S2.5-5.5/PH1/2 VOLT	1
Lock-blade knife with plastic handle	SLICER 1K	1
Sheathing strippers	AM 25	1
Water Pump Pliers	WPZ 250	1
Continuity testers	VT CTL	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Crimping tool	PZ 10 HEX	1
Screwdriver Voltagetester	SD ELEC PRO	1
Tape measure	FLEXIMET 5 M	1
Wire-end ferrule box	H-BOX 0,5-2,50MM DIN	1
Stripping tool for up to 16 mm <sup>2</sup>	STRIPAX 16	1
Sheathing stripper for UTP and STP data cables	AM 12	1
Crimping tool	PZ 16	1
Screwdriver set	SD SET T10/15/20/25/30/40 TR	1
Screwing tool	BIT-BOX 11	1
Screwdriver Bitholder	SD BITHOLDER 1/4	1
Spirit Level	SPIRIT LEVEL	1
Hacksaw	PUK HACKSAW	1

**Technical data**

Depth / Width / Height	352 / 465 / 255 mm
Weight	11952 GRM

**Ordering data**

Type	Qty.	Order No.
TOP CASE ULTIMATE	1	2903580000

**PRO CASE ULTIMATE PLUS****Assembly**

Description of article	Type	Qty.
Toolbox, empty	PRO CASE LEER	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Screwing tool	SK WSD-S 1,5-10,0	1
Non-contact voltage tester	VT LCL	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Folding Ruler	FOLDING RULER	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Lock-blade knife with plastic handle	SLICER 1K	1
Spirit Level	SPIRIT LEVEL	1
Sheathing strippers	AM 25	1
Hammer	HAMMER	1
Water Pump Pliers	WPZ 250	1
Hacksaw	PUK HACKSAW	1
Continuity testers	VT CTL	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Crimping tool	PZ 10 HEX	1
Screwdriver Voltagetester	SD ELEC PRO	1
Tape measure	FLEXIMET 5 M	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Stripping tool for up to 16 mm <sup>2</sup>	STRIPAX 16	1
Sheathing stripper for UTP and STP data cables	AM 12	1
Crimping tool	PZ 16	1
Screwdriver set	SD SET T10/15/20/25/30/40 TR	1
Screwing tool	BIT-BOX 11	1

**Technical data**

Depth / Width / Height	170 / 480 / 400 mm
Weight	8432 GRM

**Ordering data**

Type	Qty.	Order No.
PRO CASE ULTIMATE PLUS	1	2903610000

**TOP CASE ULTIMATE PLUS****Assembly**

Description of article	Type	Qty.
Toolbox, empty	TOP CASE	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Screwing tool	SK WSD-S 1,5-10,0	1
Non-contact voltage tester	VT LCL	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Folding Ruler	FOLDING RULER	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Lock-blade knife with plastic handle	SLICER 1K	1
Spirit Level	SPIRIT LEVEL	1
Sheathing strippers	AM 25	1
Hammer	HAMMER	1
Water Pump Pliers	WPZ 250	1
Hacksaw	PUK HACKSAW	1
Continuity testers	VT CTL	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Crimping tool	PZ 10 HEX	1
Screwdriver Voltagetester	SD ELEC PRO	1
Tape measure	FLEXIMET 5 M	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Stripping tool for up to 16 mm <sup>2</sup>	STRIPAX 16	1
Sheathing stripper for UTP and STP data cables	AM 12	1
Crimping tool	PZ 16	1
Screwdriver set	SD SET T10/15/20/25/30/40 TR	1
Screwing tool	BIT-BOX 11	1

**Technical data**

Depth / Width / Height	352 / 465 / 255 mm
Weight	13223 GRM

**Ordering data**

Type	Qty.	Order No.
TOP CASE ULTIMATE PLUS	1	2903600000

**Pro Case Premium****Top Case Premium****Assembly**

Description of article	Type	Qty.
Toolbox, empty	PRO CASE LEER	1
Sheathing strippers	AM 25	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 6 ROTO L	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Sheathing stripper for UTP and STP data cables	AM 12	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Voltage tester up to 690 V / 100 Hz LED	VT COMBI PRO	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated round-nose pliers with long jaws	RZ 160	1
VDE-insulated wire-stripping pliers for conductors up to 5mm diameter	AIZ 160	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Combined cutting/screwing tool	SWIFTY SET	1
Screwing tool	SK WSD-S 1,5-10,0	1
Allen key with ball head	SKS 2,0-8,0 MR	1
Torque screwdriver, from 0.5-1.7 Nm	DMS MANUELL 0,5-1,7	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Slotted and crosshead PH screwdriver set	SD SET S2.5-5.5/PH1/2	1
Screwing tool	BIT-BOX 11	1

**Assembly**

Description of article	Type	Qty.
Toolbox, empty	TOP CASE	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Sheathing strippers	AM 25	1
Sheathing strippers	AM 16	1
Sheathing stripper for UTP and STP data cables	AM 12	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 6 ROTO L	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Voltage tester up to 690 V / 100 Hz LED	VT COMBI PRO	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated round-nose pliers with long jaws	RZ 160	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Combined cutting/screwing tool	SWIFTY SET	1
Screwing tool	SK WSD-S 1,5-10,0	1
Allen key with ball head	SKS 2,0-8,0 MR	1
Torque screwdriver, from 0.5-1.7 Nm	BIT-BOX 11	1
Slotted and crosshead PH screwdriver set	SD SET S2.5-5.5/PH1/2	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Torque screwdriver, from 0.5-1.7 Nm	DMS MANUELL 0,5-1,7	1

**Technical data**

Depth / Width / Height	170 / 480 / 400 mm
Weight	6179 GRM

**Ordering data**

Type	Qty.	Order No.
PRO CASE PREMIUM	1	9202460000
PRO CASE LEER	1	9202470000

**Technical data**

Depth / Width / Height	352 / 465 / 255 mm
Weight	11290 GRM

**Ordering data**

Type	Qty.	Order No.
TOP CASE PREMIUM	1	1345320000
TOP CASE	1	1345330000

**Pro Case Insta****Top Case Insta****Assembly**

Description of article	Type	Qty.
Toolbox, empty	PRO CASE LEER	1
Sheathing strippers	AM 25	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 6 ROTO L	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Sheathing stripper for UTP and STP data cables	AM 12	1
Voltage tester up to 690 V / 100 Hz LED	VT COMBI PRO	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Screwing tool	SK WSD-S 1,5-10,0	1
Allen key with ball head	SKS 2,0-8,0 MR	1
Ring spanner set	PACK HEXA 8-13	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Tape measure	FLEXIMET 5 M	1

**Assembly**

Description of article	Type	Qty.
Sheathing strippers	AM 25	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 6 ROTO L	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Sheathing stripper for UTP and STP data cables	AM 12	1
Voltage tester up to 690 V / 100 Hz LED	VT COMBI PRO	1
Tape measure	FLEXIMET 5 M	1
Toolbox, empty	TOP CASE	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Screwing tool	SK WSD-S 1,5-10,0	1
Allen key with ball head	SKS 2,0-8,0 MR	1
Ring spanner set	PACK HEXA 8-13	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1

**Technical data**

Depth / Width / Height	170 / 480 / 400 mm
Weight	5079 GRM

**Ordering data**

Type	Qty.	Order No.
PRO CASE INSTA	1	9203160000
PRO CASE LEER	1	9202470000

**Technical data**

Depth / Width / Height	352 / 465 / 255 mm
Weight	10800 GRM

**Ordering data**

Type	Qty.	Order No.
TOP CASE INSTA	1	1345310000
TOP CASE	1	1345330000

**Pro Case 16****Assembly**

Description of article	Type	Qty.
Toolbox, empty	PRO CASE LEER	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Stripping tool for up to 16 mm <sup>2</sup>	STRIPAX 16	1
Sheathing strippers	AM 16	1
Crimping tool	PZ 6 ROTO L	1
Crimping tool	PZ 16	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Non-contact voltage tester	VT LCL	1
Continuity testers	VT CTL	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Wire-end ferrule	H-BOX 4,0-16,0QMM DIN	1
Tape measure	FLEXIMET 5 M	1

**Top Case 16****Assembly**

Description of article	Type	Qty.
Toolbox, empty	TOP CASE	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Stripping tool for up to 16 mm <sup>2</sup>	STRIPAX 16	1
Sheathing strippers	AM 16	1
Crimping tool	PZ 6 ROTO L	1
Crimping tool	PZ 16	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Non-contact voltage tester	VT LCL	1
Continuity testers	VT CTL	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Wire-end ferrule	H-BOX 4,0-16,0QMM DIN	1
Tape measure	FLEXIMET 5 M	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1

**Technical data**

Depth / Width / Height	170 / 480 / 400 mm
Weight	6062 GRM

**Ordering data**

Type	Qty.	Order No.
PRO CASE 16	1	2602270000
PRO CASE LEER	1	9202470000

**Technical data**

Depth / Width / Height	352 / 465 / 255 mm
Weight	10306 GRM

**Ordering data**

Type	Qty.	Order No.
TOP CASE 16	1	2602310000
TOP CASE	1	1345330000

**Pro Case ELEC****Assembly**

Description of article	Type	Qty.
Toolbox, empty	PRO CASE LEER	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Wire stripper unit	STRIPAX ULTIMATE	1
Sheathing strippers	AM 16	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Crimping tool	PZ 10 HEX	1
Crimping tool for insulated connectors, 0.5-6 mm <sup>2</sup>	CTI 6	1
Screwing tool	SK WSD-S 1,5-10,0	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Slotted and crosshead PH screwdriver set	SD SET S2.5-5.5/PH1/2	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Non-contact voltage tester	VT LCL	1
Continuity testers	VT CTL	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Tape measure	FLEXIMET 5 M	1

**Top Case ELEC****Assembly**

Description of article	Type	Qty.
Toolbox, empty	TOP CASE	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Wire stripper unit	STRIPAX ULTIMATE	1
Sheathing strippers	AM 16	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Crimping tool	PZ 10 HEX	1
Crimping tool for insulated connectors, 0.5-6 mm <sup>2</sup>	CTI 6	1
Screwing tool	SK WSD-S 1,5-10,0	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Non-contact voltage tester	VT LCL	1
Continuity testers	VT CTL	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Tape measure	FLEXIMET 5 M	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Slotted and crosshead PH screwdriver set	SD SET S2.5-5.5/PH1/2	1

**Technical data**

Depth / Width / Height	170 / 480 / 400 mm
Weight	7266 GRM

**Ordering data**

Type	Qty.	Order No.
PRO CASE ELEC	1	2602280000
PRO CASE LEER	1	9202470000

**Pro Case CAB****Top Case CAB****Assembly**

Description of article	Type	Qty.
Toolbox, empty	PRO CASE LEER	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Crimping tool	PZ 10 HEX	1
Combined cutting/screwing tool	SWIFTY SET	1
Screwing tool	SK WSD-S 1,5-10,0	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Torx® wrenches with hole drilled in tip, 8-piece set	TH-S 9-40	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Non-contact voltage tester	VT LCL	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Continuity testers	VT CTL	1
Tape measure	FLEXIMET 5 M	1

**Assembly**

Description of article	Type	Qty.
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
Crimping tool	PZ 10 HEX	1
Combined cutting/screwing tool	SWIFTY SET	1
Screwing tool	SK WSD-S 1,5-10,0	1
VDE-insulated Slotted and crosshead PH-SD screwdriver set, SlimLine	SDI SET SLIM S3.5-6.5/PH1/2	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Torx® wrenches with hole drilled in tip, 8-piece set	TH-S 9-40	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
Non-contact voltage tester	VT LCL	1
Wire-end ferrule box	H-BOX 0,5-2,5QMM DIN	1
Continuity testers	VT CTL	1
Tape measure	FLEXIMET 5 M	1
Toolbox, empty	TOP CASE	1

**Technical data**

Depth / Width / Height	170 / 480 / 400 mm
Weight	6162 GRM

**Ordering data**

Type	Qty.	Order No.
PRO CASE CAB	1	2602250000
PRO CASE LEER	1	9202470000

**Technical data**

Depth / Width / Height	352 / 465 / 255 mm
Weight	10410 GRM

**Ordering data**

Type	Qty.	Order No.
TOP CASE CAB	1	2602290000
TOP CASE	1	1345330000

**P BAG XL SET1****P BAG XL SET2****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Sheathing strippers	AM 25	1
Crimping tool	PZ 6 ROTO L	1
Voltage tester up to 690 V / 100 Hz LED	VT COMBI PRO	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1

**Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Sheathing strippers	AM 25	1
Crimping tool	PZ 6 ROTO L	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1983 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 1	1	2602110000
P BAG BIG	1	2576620000

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1963 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 2	1	2602120000
P BAG BIG	1	2576620000

**P BAG XL SET3****P BAG XL SET4****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Sheathing strippers	AM 25	1
Crimping tool	PZ 6 ROTO L	1

**Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Sheathing strippers	AM 25	1
Crimping tool	PZ 10 HEX	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1666.79 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 3	1	2903460000
P BAG BIG	1	2576620000

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	2038 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 4	1	2602140000
P BAG BIG	1	2576620000

**P BAG XL SET5****P BAG XL SET6****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Sheathing strippers	AM 25	1
Crimping tool	PZ 10 HEX	1

**Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 6 ROTO ADJ	1
Sheathing strippers	AM 25	1

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1744.7 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 5	1	2903470000
P BAG BIG	1	2576620000

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1675.84 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 6	1	2903480000
P BAG BIG	1	2576620000

**P BAG XL SET7****P BAG XL SET8****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Sheathing strippers	AM 25	1
Wire stripper unit	STRIPAX ULTIMATE	1
Crimping tool	PZ 6 ROTO L	1
Voltage tester up to 1000 V AC and 1.500 V DC / 950 Hz LCD, Voltage tester	VT DIGI PRO	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1

**Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
VDE-insulated long-nose pliers, 180 mm long	KBZ 180	1
VDE-insulated combination pliers, 160 mm long	FRZ S 160	1
Screwdriver Voltagetester	SD ELEC PRO	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 10 HEX	1

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1960 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 7	1	2602170000
P BAG BIG	1	2576620000

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	2034.88 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 8	1	2903490000
P BAG BIG	1	2576620000

**P BAG XL SET9****P BAG XL SET10****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Screwdriver Voltagetest	SD ELEC PRO	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 6 ROTO L	1

**Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Screwdriver Voltagetest	SD ELEC PRO	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 6 ROTO ADJ	1

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1966.89 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 9	1	2903500000
P BAG BIG	1	2576620000

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1965.79 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 10	1	2903510000
P BAG BIG	1	2576620000

**P BAG XL SET11****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Screwdriver Voltagetest	SD ELEC PRO	1
Water Pump Pliers	WPZ 250	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1

**P BAG XL SET12****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG BIG	1
Wire stripper unit	STRIPAX ULTIMATE	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Screwdriver Voltagetest	SD ELEC PRO	1
Water Pump Pliers	WPZ 250	1

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1867.02 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 11	1	2903520000
P BAG BIG	1	2576620000

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1847.31 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG XL SET 12	1	2903530000
P BAG BIG	1	2576620000

**P BAG SET1****P BAG SET2****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG	1
Wire stripper unit	STRIPAX ULTIMATE	1
Crimping tool	PZ 10 HEX	1
Hexagon socket wrench set	SKS 2.0-8.0	1
VDE-insulated combination pliers, 180 mm long	KBZ 160	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100	SDIS 0.6X3.5X100	1

**Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 6 ROTO L	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1

**Technical data**

Depth / Width / Height	170 / 260 / 50 mm
Weight	1437 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG SET 1	1	2561430000
P BAG	1	2548180000

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1477.07 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG SET 2	1	2903430000
P BAG	1	2548180000

**P BAG SET3****P BAG SET4****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Voltage tester from 12 - 690 V	VT	1
VDE-insulated combination pliers, 160 mm long	KBZ 160	1
Junction box sheathing stripper with indiv. core stripping unit and longitudinal cutter	STRIPPER ROUND TOP	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1

**Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 6 ROTO L	1
Non-contact voltage tester	VT LCL	1

**Technical data**

Depth / Width / Height	170 / 260 / 50 mm
Weight	1188.8 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG SET 3	1	2579420000
P BAG	1	2548180000

**Technical data**

Depth / Width / Height	170 / 260 / 50 mm
Weight	1219.1 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG SET 4	1	2579430000
P BAG	1	2548180000

**P BAG SET5****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool	PZ 10 HEX	1
Non-contact voltage tester	VT LCL	1

**P BAG SET6****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG	1
Crimping tool	PZ 6 ROTO ADJ	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Non-contact voltage tester	VT LCL	1

**Technical data**

Depth / Width / Height	170 / 260 / 50 mm
Weight	1294.1 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG SET 5	1	2579440000
P BAG	1	2548180000

**Technical data**

Depth / Width / Height	170 / / 50 mm
Weight	1243.62 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG SET 6	1	2903440000
P BAG	1	2548180000

**P BAG SET7****P BAG SET8****Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 16 mm <sup>2</sup>	STRIPAX 16	1
Crimping tool	PZ 16	1
Non-contact voltage tester	VT LCL	1

**Assembly**

Description of article	Type	Qty.
Toolbag, empty	P BAG	1
Crimping tool	PZ 6 ROTO ADJ	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Non-contact voltage tester	VT LCL	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1

**Technical data**

Depth / Width / Height	170 / 260 / 50 mm
Weight	1220.8 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG SET 7	1	2579460000
P BAG	1	2548180000

**Technical data**

Depth / Width / Height	220 / 320 / 60 mm
Weight	1525.04 GRM

**Ordering data**

Type	Qty.	Order No.
P BAG SET 8	1	2903450000
P BAG	1	2548180000

**Tool Bag SDI Basic****Tool Bag SDI Electric Premium****Assembly**

Description of article	Type	Qty.
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
VDE-insulated diagonal-cutting pliers, 180 mm long	SE HD 180	1
Water Pump Pliers	WPZ 250	1
VDE-insulated screwdriver with slotted blade 0.4 x 2.0 x 60	SDIS 0.4X2.0X60	1
VDE-insulated screwdriver with slotted blade 0.4x2.5x75	SDIS 0.4X2.5X75	1
VDE-insulated screwdriver with slotted blade 0.5x3.0x100	SDIS 0.5X3.0X100	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100	SDIS 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100	SDIS 0.8X4.0X100	1
VDE-insulated screwdriver with slotted blade 1.0x4.5x125	SDIS 1.0X4.5X125	1
VDE-insulated screwdriver with slotted blade 1.0x5.5x125	SDIS 1.0X5.5X125	1
VDE-insulated crosshead screwdriver, Phillips size 0	SDIK PH0 X 60	1
VDE-insulated crosshead screwdriver, Phillips size 1	SDIK PH1 X 80	1
VDE-insulated crosshead screwdriver, Phillips size 2	SDIK PH2 X 100	1
VDE-insulated crosshead screwdriver, Pozidrive size 1	SDIK PZ1 X 80	1
VDE-insulated crosshead screwdriver, Pozidrive size 2	SDIK PZ2 X 100	1
Screwdriver Voltagetest	SD ELEC PRO	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1

**Assembly**

Description of article	Type	Qty.
Crimping tool	PZ 10 HEX	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
Water Pump Pliers	WPZ 250	1
VDE-insulated screwdriver with slotted blade 0.4 x 2.0 x 60	SDIS 0.4X2.0X60	1
VDE-insulated screwdriver with slotted blade 0.4x2.5x75	SDIS 0.4X2.5X75	1
VDE-insulated screwdriver with slotted blade 0.5x3.0x100	SDIS 0.5X3.0X100	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100	SDIS 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100	SDIS 0.8X4.0X100	1
VDE-insulated screwdriver with slotted blade 1.0x4.5x125	SDIS 1.0X4.5X125	1
VDE-insulated screwdriver with slotted blade 1.0x5.5x125	SDIS 1.0X5.5X125	1
VDE-insulated crosshead screwdriver, Phillips size 0	SDIK PH0 X 60	1
VDE-insulated crosshead screwdriver, Phillips size 1	SDIK PH1 X 80	1
VDE-insulated crosshead screwdriver, Phillips size 2	SDIK PH2 X 100	1
VDE-insulated crosshead screwdriver, Pozidrive size 1	SDIK PZ1 X 80	1
VDE-insulated crosshead screwdriver, Pozidrive size 2	SDIK PZ2 X 100	1
Screwdriver Voltagetest	SD ELEC PRO	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1

**Technical data**

Depth / Width / Height	400 / 280 / 50 mm
Weight	2662.01 GRM

**Ordering data**

Type	Qty.	Order No.
TOOL BAG SDI BASIC	1	2936990000

**Technical data**

Depth / Width / Height	400 / 280 / 50 mm
Weight	3040.8 GRM

**Ordering data**

Type	Qty.	Order No.
TOOL BAG SDI ELECTRIC PREMIUM	1	2937000000

**Tool Bag SDI Electric Slim****Tool Bag SD Mechanic****Assembly**

Description of article	Type	Qty.
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Cutting tool for up to 8 mm outside diameter	KT 8	1
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
VDE-insulated screwdriver with slotted blade 0.6x3.5x100, SlimLine	SDIS SLIM 0.6X3.5X100	1
VDE-insulated screwdriver with slotted blade 0.8x4.0x100, SlimLine	SDIS SLIM 0.8X4.0X100	1
VDE-insulated screwdriver with slotted blade 1.0x5.5x125, SlimLine	SDIS SLIM 1.0X5.5X125	1
VDE-insulated crosshead screwdriver, Phillips size 1, SlimLine	SDIK SLIM PH1 X 80	1
VDE-insulated crosshead screwdriver, Phillips size 2, SlimLine	SDIK SLIM PH2 X 100	1
VDE-insulated crosshead screwdriver, Pozidrive size 1, SlimLine	SDIK SLIM PZ1 X 80	1
VDE-insulated crosshead screwdriver, Pozidrive size 2, SlimLine	SDIK SLIM PZ2 X 100	1
SlimLine, VDE-insulated crosshead screwdriver, Pozidrive size 2	SDIPM SLIM PZ2 X 100	1
VDE-insulated Torx screwdriver, size 10, SlimLine	SDIT SLIM T10 X 100	1
VDE-insulated Torx screwdriver, size 15, SlimLine	SDIT SLIM T15 X 100	1
VDE-insulated Torx screwdriver, size 20, SlimLine	SDIT SLIM T20 X 100	1
VDE-insulated Torx screwdriver, size 25, SlimLine	SDIT SLIM T25 X 125	1
Screwdriver Voltagetest	SD ELEC PRO	1
Screwing tool	SK WSD-S 1,5-10,0	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1

**Assembly**

Description of article	Type	Qty.
VDE-insulated combination pliers, 180 mm long	KBZ 180	1
VDE-insulated long-nose pliers with cutter, 160 mm long	FRZ S 160	1
Screwing tool	SK WSD-S 1,5-10,0	1
Water Pump Pliers	WPZ 250	1
Screwdriver with slotted bit, 0.4 x 2	SDS 0.4X2.0X60	1
Screwdriver with slotted bit, 0.4 x 2.5	SDS 0.4X2.5X75	1
Screwdriver with slotted bit, 0.5 x 3	SDS 0.5X3.0X80	1
Screwdriver with slotted bit, 0.6 x 3.5	SDS 0.6X3.5X100	1
Insulated screwdriver with slotted bit 0.8x4	SDS 0.8X4.0X100	1
Screwdriver with slotted bit, 0.8 x 4.5	SDS 0.8X4.5X125	1
Crosshead screwdriver, Phillips, size 0	SDK PH0 X 60	1
Crosshead screwdriver, Phillips, size 1	SDK PH1 X 80	1
Crosshead screwdriver, Phillips, size 2	SDK PH2 X 100	1
Crosshead screwdriver, Pozidrive, size 1	SDK PZ1 X 80	1
Crosshead screwdriver, Pozidrive, size 2	SDK PZ2 X 100	1
Bitholder 1/4	SDQ T HANDLE BITHOLDER 1/4	1
Screwdriver Voltagetest	SD ELEC PRO	1
Universal electrical cabinet key	CROSS-KEY UNIVERSAL	1
Screwing tool	BIT-BOX 11 TRX + IS	1

**Technical data**

Depth / Width / Height	400 / 280 / 50 mm
Weight	2792.86 GRM

**Ordering data**

Type	Qty.	Order No.
TOOL BAG SDI ELECTRIC SLIM	1	2937010000

**Technical data**

Depth / Width / Height	400 / 280 / 50 mm
Weight	2734.81 GRM

**Ordering data**

Type	Qty.	Order No.
TOOL BAG SD MECHANIK	1	2936980000

**Crimp Set PZ 4**

Crimp set for cutting, stripping and crimping of wire-end ferrules up to 4.0 mm<sup>2</sup>, consisting of:

- Assortment box PSC 01 blank
- A8 insert (4 pieces)
- A7 insert (2 pieces)
- Tool stripax® stripping tool for conductors with PVC insulation from 0.08...6.0 mm<sup>2</sup>
- PZ 4 crimping tool for wire-end ferrules from 0.5...4.0 mm<sup>2</sup>
- Wire-end ferrules with plastic collars H 0.5...H 4.0
- Weidmüller colour code

**Crimp Set PZ 3**

Crimp set for cutting, stripping and crimping of wire-end ferrules up to 6.0 mm<sup>2</sup>, consisting of:

- Assortment box PSC 01 blank
- A8 insert (6 pieces)
- A7 insert (1 piece)
- stripax® stripping tool for conductors with PVC insulation from 0.08...10.0 mm<sup>2</sup>
- PZ 3 crimping tool for wire-end ferrules from 0.5...6.0 mm<sup>2</sup>
- Wire-end ferrules with plastic collars H 0.5...H 6.0
- Weidmüller colour code

**Crimp Set PZ 6 Roto L**

Crimp set for cutting, stripping and crimping of wire-end ferrules up to 6.0 mm<sup>2</sup>, consisting of:

- Assortment box PSC 01 blank
- A8 insert (6 pieces)
- A7 insert (1 piece)
- Tool stripax® stripping tool for conductors with PVC insulation from 0.08...6.0 mm<sup>2</sup>
- PZ 6 Roto crimping tool for wire-end ferrules from 0.14...6.0 mm<sup>2</sup>
- Wire-end ferrules with plastic collars H 0.5...H 6, Weidmüller colour code

**Assembly**

Type	Piece
STRIPAX	Stripping and cutting tool
PZ 4	Crimping tool for wire-end ferrules
H0,5/14 OR	Wire-end ferrule
H0,75/14 W	Wire-end ferrule
H1,0/14 GE	Wire-end ferrule
H1,5/14 R	Wire-end ferrule
H2,5/15D BL	Wire-end ferrule
H4,0/18 GR SV	Wire-end ferrule
	250

**Assembly**

Type	Piece
PZ 3	Crimping tool for wire-end ferrules
STRIPAX	Stripping and cutting tool
H0,5/14 OR	Wire-end ferrule
H0,75/14 W	Wire-end ferrule
H1,0/14 GE	Wire-end ferrule
H1,5/14 R	Wire-end ferrule
H2,5/15D BL	Wire-end ferrule
H4,0/18 GR SV	Wire-end ferrule
H6,0/20 SW	Wire-end ferrule
	250
	100

**Assembly**

Type	Piece
STRIPAX	Stripping and cutting tool
PZ 6 ROTO L	Crimping tool for wire-end ferrules
H0,5/14 OR	Wire-end ferrule
H0,75/14 W	Wire-end ferrule
H1,0/14 GE	Wire-end ferrule
H1,5/14 R	Wire-end ferrule
H2,5/15D BL	Wire-end ferrule
H4,0/18 GR SV	Wire-end ferrule
H6,0/20 SW	Wire-end ferrule
	250
	100

**Technical data**

Depth / Width / Height	261 / 338 / 57 mm
Weight	1728.66 GRM

**Technical data**

Depth / Width / Height	261 / 338 / 57 mm
Weight	1723.38 GRM

**Ordering data**

Colour code	Type	Order No.
Weidmüller	CRIMP-SET PZ 4	9025800000
DIN	CRIMP-SET PZ 4 D	9028630000

**Ordering data**

Colour code	Type	Order No.
Weidmüller	CRIMP-SET PZ 3	9028650000

**Technical data**

Depth / Width / Height	261 / 338 / 56 mm
Weight	1735 GRM

**Ordering data**

Colour code	Type	Order No.
Weidmüller	CRIMP-SET PZ 6 ROTO L	9028680000
DIN	CRIMP-SET PZ 6 ROTO L D	9028690000
Miscellaneous	CRIMP-SET PZ 6 ROTO L T	9028700000

**Crimp Set PZ 6/5**

Crimp set for cutting, stripping and crimping of wire-end ferrules up to 6.0 mm<sup>2</sup>, consisting of:

- Assortment box PSC 01 blank
- A8 insert (6 pieces)
- A7 insert (1 piece)
- stripax® stripping tool for conductors with PVC insulation from 0.08...10.0 mm<sup>2</sup>
- PZ 6/5 crimping tool for wire-end ferrules from 0.25...10.0 mm<sup>2</sup>
- Wire-end ferrules with plastic collars H 0.5...H 6.0
- Weidmüller colour code

**PZ 10 HEX**

Crimp set for cutting, stripping and crimping of wire-end ferrules up to 10.0 mm<sup>2</sup>, consisting of:

- Assortment box PSC 01
- A8 insert (8 pieces)
- stripax® stripping tool for PVC-insulated conductors from 0.08...10 mm<sup>2</sup>
- Crimp tool PZ 10 HEX for wire-end ferrules from 0.25...10 mm<sup>2</sup>
- Wire-end ferrules with plastic collars H 0.5 .. H 10.0
- Weidmüller colour code

**PZ 10 SQR**

Crimp set for cutting, stripping and crimping of wire-end ferrules up to 10.0 mm<sup>2</sup>, consisting of:

- Assortment box PSC 01
- A8 insert (8 pieces)
- stripax® stripping tool for PVC-insulated conductors from 0.08...10 mm<sup>2</sup>
- Crimp tool PZ 10 SQR for wire-end ferrules from 0.14...10 mm<sup>2</sup>
- Wire-end ferrules with plastic collars H 0.5 .. H 10.0
- Weidmüller colour code

**H****Assembly**

Type	Piece
STRIPAX	Stripping and cutting tool
PZ 6/5	Crimping tool for wire-end ferrules
H0,5/14 OR	Wire-end ferrule
H0,75/14 W	Wire-end ferrule
H1,0/14 GE	Wire-end ferrule
H1,5/14 R	Wire-end ferrule
H2,5/15D BL	Wire-end ferrule
H4,0/18 GR SV	Wire-end ferrule
H6,0/20 SW	Wire-end ferrule

**Assembly**

Type	Piece
STRIPAX	Stripping and cutting tool
PZ 10 HEX	Crimping tool for wire-end ferrules
H0,5/14 OR	Wire-end ferrule
H0,75/14 W	Wire-end ferrule
H1,0/14 GE	Wire-end ferrule
H1,5/14 R	Wire-end ferrule
H2,5/15D BL	Wire-end ferrule
H4,0/20D GR	Wire-end ferrule
H6,0/20 SW	Wire-end ferrule
H10,0/22 EB	Wire-end ferrule

**Assembly**

Type	Piece
STRIPAX	Stripping and cutting tool
PZ 10 SQR	Crimping tool for wire-end ferrules
H0,5/14 OR	Wire-end ferrule
H0,75/14 W	Wire-end ferrule
H1,0/14 GE	Wire-end ferrule
H1,5/14 R	Wire-end ferrule
H2,5/15D BL	Wire-end ferrule
H4,0/20D GR	Wire-end ferrule
H6,0/20 SW	Wire-end ferrule
H10,0/22 EB	Wire-end ferrule

**Technical data**

Depth / Width / Height	261 / 338 / 57 mm
Weight	1696.12 GRM

**Technical data**

Depth / Width / Height	261 / 338 / 57 mm
Weight	1803 GRM

**Ordering data**

Colour code	Type	Order No.
Weidmüller	CRIMP-SET PZ 6/5	9028740000

**Ordering data**

Colour code	Type	Order No.
Weidmüller	CRIMPSET PZ 10 HEX	1542250000
DIN	CRIMPSET PZ 10 HEX D	1542260000
Miscellaneous	CRIMPSET PZ 10 HEX T	1542270000

**Technical data**

Depth / Width / Height	261 / 338 / 57 mm
Weight	1586.64 GRM

**Ordering data**

Colour code	Type	Order No.
Weidmüller	CRIMPSET PZ 10 SQR	1542280000
DIN	CRIMPSET PZ 10 SQR D	1542290000
Miscellaneous	CRIMPSET PZ 10 SQR T	1542310000

**Crimp Set stripax® plus**

Crimp set for cutting, stripping and crimping of reel-packaged wire-end ferrules up to 2.5 mm<sup>2</sup>, consisting of:

- PSC 01 assortment box, clear with foam insert
- Tool stripax® Plus combination tool for processing strips of linked wire-end ferrules of 0.5...2.5 mm<sup>2</sup> from Weidmüller
- Wire-end ferrules with plastic collars H 0.5...H 2.5
- Weidmüller colour code

**Crimp Set PZ 16**

Crimp set for cutting, stripping and crimping of wire-end ferrules up to 16.0 mm<sup>2</sup>, consisting of:

- PSC 01 neutral assortment box
- A8 inserts (4 pieces)
- A7 inserts (2 pieces)
- stripax® 16 stripping tool® for conductors with PVC insulation from 6.0...16.0 mm<sup>2</sup>
- PZ 16 crimping tool for wire-end ferrules from 6.0...16.0 mm<sup>2</sup>
- Wire-end ferrules with plastic collar H 6.0...H 16.0
- Weidmüller colour code

**Crimp Set PZ 50**

Crimp set for stripping and crimping of wire-end ferrules up to 50.0 mm<sup>2</sup>, consisting of:

- Assortment box PSC 01 blank
- A7 insert (4 pieces)
- Foam insert for tools
- Sheathing stripper AM 25 for round PVC cables of 6.0...25.0 mm<sup>2</sup>
- PZ 50 crimping tool for wire-end ferrules of 25, 35 and 50.0 mm<sup>2</sup>
- Wire-end ferrules with plastic collar H 25.0...H 50.0
- Weidmüller colour code

**Assembly**

Type	Piece
STRIPAX PLUS 2.5	Crimping tool for wire-end ferrules
1	
H0,5/14 OR BD	Wire-end ferrule
500	
H0,75/14 W BD	Wire-end ferrule
500	
H1,0/14 GE BD	Wire-end ferrule
500	
H1,5/14 R BD	Wire-end ferrule
500	
H2,5/14D BL BD	Wire-end ferrule
500	

**Assembly**

Type	Piece
STRIPAX	Stripping and cutting tool
1	
PZ 16	Crimping tool for wire-end ferrules
1	
H6,0/20 SW	Wire-end ferrule
100	
H10,0/22 EB	Wire-end ferrule
100	
H16,0/22 GN	Wire-end ferrule
100	
H16,0/28 GN	Wire-end ferrule
100	

**Assembly**

Type	Piece
AM 25	Sheathing strippers
1	
PZ 50	Crimping tool for wire-end ferrules
1	
H25,0/36 BR	Wire-end ferrule
50	
H25,0/30 BR	Wire-end ferrule
50	
H35,0/30 BE	Wire-end ferrule
50	
H50,0/36 OLIV	Wire-end ferrule
50	

**Technical data**

Depth / Width / Height	261 / 338 / 57 mm
Weight	1094 GRM

**Technical data**

Depth / Width / Height	261 / 338 / 57 mm
Weight	1680.74 GRM

**Ordering data**

Colour code	Type	Order No.
Weidmüller	CRIMP-SET STRIPAX PLUS	9028770000
DIN	CRIMP-SET STRIPAX PLUS D	9028780000
Miscellaneous	CRIMP-SET STRIPAX PLUS T	9028790000

**Ordering data**

Colour code	Type	Order No.
Weidmüller	CRIMP-SET PZ 16	9025850000

**Technical data**

Depth / Width / Height	261 / 338 / 57 mm
Weight	1759.55 GRM

**Ordering data**

Colour code	Type	Order No.
Weidmüller	CRIMP-SET PZ 50	9028850000

**Crimp Set CTI 6****Assembly**

Description of article	Type	Qty.
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool for insulated connectors, 0.5-6 mm <sup>2</sup>	CTI 6	1
Insulated ring-cable connector 6.0 mm <sup>2</sup> / M5	LIR 6M5 V	100
Insulated ring-cable connector 6.0 mm <sup>2</sup> / M6	LIR 6M6 V	100
Insulated pin-cable connector 6.0 mm <sup>2</sup> L=14 mm	LIP 6R14 V	100
Insulated ring-cable connector 2.5 mm <sup>2</sup> / M5	LIR 2,5M5 V	100
Insulated tab-connector sleeves 2.5 mm <sup>2</sup> / 6.3x0.8	LIF 2,5F638 R	100
Insulated pin-cable connector 1.5 mm <sup>2</sup> L=12 mm	LIP 1,5R12 V	100
Insulated pin-cable connector 2.5 mm <sup>2</sup> L=12 mm	LIP 2,5R12 V	100
Insulated joint connector 6.0 mm <sup>2</sup> L=26.0 mm	LIB 6B26 VF	100
Insulated ring-cable connector 1.5 mm <sup>2</sup> / M4	LIR 1,5M4 V	100
Insulated forked-cable connector 6.0 mm <sup>2</sup> / M6	LIS 6M6 V	100
Insulated tab-connector sleeves 1.5 mm <sup>2</sup> / 6.3x0.8	LIF 1,5F638 R	100
Insulated joint connector 2.5 mm <sup>2</sup> L=24.5 mm	LIB 2,5B25 VF	100
Insulated forked-cable connector 1.5 mm <sup>2</sup> / M4	LIS 1,5M4 V	100
Insulated forked-cable connector 2.0 mm <sup>2</sup> / M5	LIS 2,5M5 V	100
Insulated ring-cable connector 1.5 mm <sup>2</sup> / M5	LIR 1,5M5 V	100
Insulated ring-cable connector 2.5 mm <sup>2</sup> / M6	LIR 2,5M6 V	100
Insert for assortment case (69x55x79) mm	EINSATZ BA8-PSC 80	1
Insulated tab-connector sleeves 1.5 mm <sup>2</sup> / 2.8x0.8	LIF 1,5F288 R	100
Insulated tab-connector sleeves 6.0 mm <sup>2</sup> / 6.3x0.8	LIF 6F638 R	100
Insulated joint connector 1.5 mm <sup>2</sup> L=24.5 mm	LIB 1,5B25 VF	100
Empty enclosure	KOFFER PSC80 PC	1

**Technical data**

Depth / Width / Height	330 / 413 / 79 mm
Weight	4796.62 GRM

**Ordering data**

Type	Qty.	Order No.
CRIMPSET CTI 6	1	9202600000

**Crimp Set PZ / CTI****Assembly**

Description of article	Type	Qty.
Stripping tool for up to 10 mm <sup>2</sup>	STRIPAX	1
Crimping tool for insulated connectors, 0.5-6 mm <sup>2</sup>	CTI 6	1
Crimping tool	PZ 6 ROTO L	1
Wire end ferrule with plastic collar, white	H0,5/14D W	500
Wire end ferrule with plastic collar, red	H1,0/14D R	500
Wire end ferrule with plastic collar, blue	H2,5/15D BL	500
Wire end ferrule with plastic collar, grey	H4,0/18D GR	500
Wire end ferrule with plastic collar, yellow	H6,0/20D GE	100
Insulated ring-cable connector 6.0 mm <sup>2</sup> / M6	LIR 6M6 V	100
Insulated pin-cable connector 6.0 mm <sup>2</sup> L=14 mm	LIP 6R14 V	100
Insulated ring-cable connector 2.5 mm <sup>2</sup> / M5	LIR 2,5M5 V	100
Insulated tab-connector sleeves 2.5 mm <sup>2</sup> / 6.3x0.8	LIF 2,5F638 R	100
Insulated pin-cable connector 1.5 mm <sup>2</sup> L=12 mm	LIP 1,5R12 V	100
Insulated pin-cable connector 2.5 mm <sup>2</sup> L=12 mm	LIP 2,5R12 V	100
Insulated joint connector 6.0 mm <sup>2</sup> L=26.0 mm	LIB 6B26 VF	100
Insulated ring-cable connector 1.5 mm <sup>2</sup> / M4	LIR 1,5M4 V	100
Insulated tab-connector sleeves 1.5 mm <sup>2</sup> / 6.3x0.8	LIF 1,5F638 R	100
Insulated joint connector 2.5 mm <sup>2</sup> L=24.5 mm	LIB 2,5B25 VF	100
Insulated ring-cable connector 1.5 mm <sup>2</sup> / M5	LIR 1,5M5 V	100
Insert for assortment case (69x55x79) mm	EINSATZ BA8-PSC 80	1
Insulated tab-connector sleeves 1.5 mm <sup>2</sup> / 2.8x0.8	LIF 1,5F288 R	100
Insulated tab-connector sleeves 6.0 mm <sup>2</sup> / 6.3x0.8	LIF 6F638 R	100
Insulated joint connector 1.5 mm <sup>2</sup> L=24.5 mm	LIB 1,5B25 VF	100
Empty enclosure	KOFFER PSC80 PC	1

**Technical data**

Depth / Width / Height	330 / 413 / 79 mm
Weight	4871.4 GRM

**Ordering data**

Type	Qty.	Order No.
CRIMPSET PZ / CTI	1	9202610000

**Crimp contact set****Assembly**

Description of article	Type	Qty.
Wire end ferrule with plastic collar, white	H0,5/14D W	500
Wire end ferrule with plastic collar, grey	H0,75/14D GR	500
Wire end ferrule with plastic collar, red	H1,0/14D R	500
Wire end ferrule with plastic collar, black	H1,5/14D SW	500
Wire end ferrule with plastic collar, blue	H2,5/15D BL	500
Wire end ferrule with plastic collar, grey	H4,0/18D GR	500
Wire end ferrule with plastic collar, yellow	H6,0/20D GE	100
Insulated ring-cable connector 6.0 mm <sup>2</sup> / M6	LIR 6M6 V	100
Insert for assortment case (47x55x79) mm	EINSATZ A8-1 CL55	100
Insert for assortment case (47x79x109) mm	EINSATZ A7-1 CL55	1
Insulated pin-cable connector 6.0 mm <sup>2</sup> L=14 mm	LIP 6R14 V	100
Insulated ring-cable connector 2.5 mm <sup>2</sup> / M5	LIR 2,5M5 V	100
Insulated tab-connector sleeves 2.5 mm <sup>2</sup> / 6.3x0.8	LIF 2,5F638 R	100
Insulated pin-cable connector 1.5 mm <sup>2</sup> L=12 mm	LIP 1,5R12 V	100
Insulated pin-cable connector 2.5 mm <sup>2</sup> L=12 mm	LIP 2,5R12 V	100
Insulated joint connector 6.0 mm <sup>2</sup> L=26.0 mm	LIB 6B26 VF	100
Insulated ring-cable connector 1.5 mm <sup>2</sup> / M4	LIR 1,5M4 V	100
Empty enclosure	KOFFER CARRY LITE 55	1
Insulated tab-connector sleeves 1.5 mm <sup>2</sup> / 6.3x0.8	LIF 1,5F638 R	100
Insulated joint connector 2.5 mm <sup>2</sup> L=24.5 mm	LIB 2,5B25 VF	100
Insulated ring-cable connector 1.5 mm <sup>2</sup> / M5	LIR 1,5M5 V	100
Insulated tab-connector sleeves 1.5 mm <sup>2</sup> / 2.8x0.8	LIF 1,5F288 R	100
Insulated tab-connector sleeves 6.0 mm <sup>2</sup> / 6.3x0.8	LIF 6F638 R	100
Insulated joint connector 1.5 mm <sup>2</sup> L=24.5 mm	LIB 1,5B25 VF	100

**Technical data**

Depth / Width / Height	330 / 413 / 57 mm
Weight	3503 GRM

**Ordering data**

Type	Qty.	Order No.
CRIMP-SET KONTAKTE	1	9202640000

**Tool Set IE-POF****Contents:**

- Assortment case PSC 80
- Kevlar scissors for aramid fibres
- Multifunction tool HTX-IE-POF
- multi-stripax® stripping tool IE-POF

**H****Assembly**

Type	Piece
HTX-IE-POF	1
MULTI-STRIPAX IE-POF	1
SCISSORS KEVLAR	1
Electrician's scissors	1

**Technical data**

Depth / Width / Height	241 / 338 / 79 mm
Weight	1833 GRM

**Ordering data**

Colour code	Type	Order No.
	TOOL SET IE-POF	1208930000

**Inserts**

Transparent, loose-packed compartment inserts for individual interior layouts.

- Resistant to oils, acids and alkalis
- Made from unbreakable polycarbonate

**A7-1 / A9-1 / A9-2**

Inserts for PSC4-01, PSC5-01, CARRYLITE 55, CARRYLITE 80





- Inserts for PSC4-01, PSC5-01, CARRYLITE 55, CARRYLITE 80

**A8-1 / A8-2**

Inserts for PSC4-01, PSC5-01, CARRYLITE 55, CARRYLITE 80



- Inserts for horizontal installation

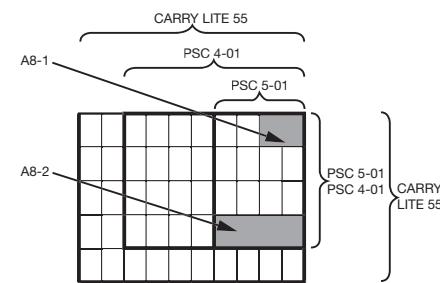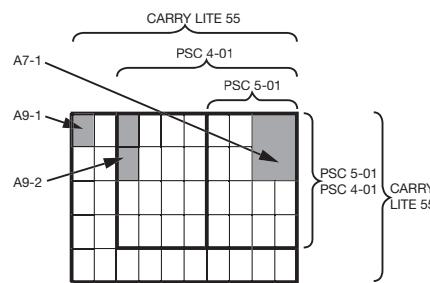**Technical data****Product data**

Colour of body  
Colour of fittings  
Cover material

Weight

**Dimensions**

Depth

Width

Height

**Note****Ordering data****Version****EINSATZ A7-1 CL55**

Natural

28 GRM

109 mm

79 mm

47 mm

**EINSATZ A9-1 CL55**

Natural

15 GRM

39 mm

47 mm

**EINSATZ A9-2 CL55**

Natural

20 GRM

109 mm

39 mm

47 mm

**EINSATZ A8-1 CL55**

Natural

15.67 GRM

79 mm

55 mm

47 mm

**EINSATZ A8-2 CL55**

Natural

27.39 GRM

157 mm

55 mm

47 mm

**Type**

EINSATZ A7-1 CL55

100

**9028460000**

**Qty.****Order No.****Type**

EINSATZ A9-1 CL55

50

**9202020000**

**Qty.****Order No.****Type**

EINSATZ A9-2 CL55

1

**9203260000**

**Qty.****Order No.**

## Inserts

Transparent, loose-packed compartment inserts for individual interior layouts.

- Resistant to oils, acids and alkalis
- Made from unbreakable polypropylene

## BA7-1 / BA8-1

## Inserts for PSC80




## BA8-1

- Divider for horizontal installation

## BA7-1

- Divider for vertical installation

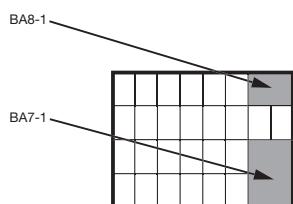

## Technical data

## Product data

Colour of body  
Colour of fittings  
Cover material  
Weight

## Dimensions

Depth  
Width  
Height

## Note

## Ordering data

## Version

## Note

## EINSATZ BA7-PSC 80

EINSATZ BA7-PSC 80	EINSATZ BA8-PSC 80
Natural	Natural
43 GRM	26 GRM
109 mm	55 mm
79 mm	79 mm
69 mm	69 mm

## Type

Type	Qty.	Order No.
EINSATZ BA7-PSC 80	1	9202320000
EINSATZ BA8-PSC 80	1	9202310000

**Assortment boxes and cases**

- Body of case made from unbreakable polypropylene
- Portable and uncluttered storage in minimum space
- With 2 sturdy sliding catches
- Assortment cases and boxes can be placed upright and can be stacked safely without any sliding
- Can be subdivided with inserts
- U-section grid in cover and base holds the inserts in position and ensures sorted contents remain sorted
- Transparent polycarbonate cover
- Excellent shock resistance!
- With ergonomic carry handle

**PSC4-01 / PSC 80**

Assortment case, empty

**CARRYLITE 55 / CARRYLITE 80**

Assortment case, empty

**Technical data****Product data**

Colour of body  
Colour of fittings

Cover material

Weight

**Dimensions**

Depth

Width

Height

**Note****Ordering data****Version****Note**

KOFFER PSC4-01	KOFFER PSC80 PC
Anthracite	Anthracite
orange	orange
Polycarbonate	Polycarbonate
548 GRM	500.72 GRM
261 mm	261 mm
338 mm	338 mm
56 mm	78 mm


KOFFER CARRY LITE 55	KOF CARRYLITE 80
Anthracite	Anthracite
orange	orange
Polycarbonate	Polycarbonate
952 GRM	1040 GRM
330 mm	330 mm
413 mm	413 mm
57 mm	79 mm

Type	Qty.	Order No.
KOFFER PSC4-01	1	9028860000
KOFFER PSC80 PC	1	9202330000

Type	Qty.	Order No.
KOFFER CARRY LITE 55	1	9202000000
KOF CARRYLITE 80	1	1309580000

**PSC 5-01**

Assortment box, empty

**H****KOFFER PSC5-01 PP**

Anthracite

orange

Polypropylene

226 GRM

195 mm

241 mm

56 mm

Type	Qty.	Order No.
KOFFER PSC5-01 PP	1	9202010000

**PUK HACKSAW****Puk hacksaw**

- Ergonomic glass ball reinforced handle
- Stepless blade tension via nut
- 65mm high saw space

**Ordering data**

Type	Qty.	Order No.
PUK HACKSAW	1	2888390000

**SPIRIT LEVEL****Spirit level**

- Unbreakable display
- V-groove for alignment on pipes
- High transparency and durability

**Ordering data**

Type	Qty.	Order No.
SPIRIT LEVEL	1	2888400000

**HAMMER****Hammer**

- C45 steel head forged according to DIN 6475
- Induction hardened and powder coated
- Handle with protective collar

**Ordering data**

Type	Qty.	Order No.
HAMMER	1	2888420000

**SOFT FACE HAMMER****Soft face hammer**

- Recoil-free for high impact power
- Wear-resistant, no chipping, low noise
- Handle vibration-damped and ergonomically shaped

**Ordering data**


Type	Qty.	Order No.
SOFT FACE HAMMER	1	2888430000

**STEEL SCALE 300MM****Steel scale**

- Made of stainless INOX spring steel
- Scale scaled on both sides
- Very good readability due to matt surface and sharp graduation image

**Ordering data**

Type	Qty.	Order No.
STEEL SCALE 300MM	1	2888440000

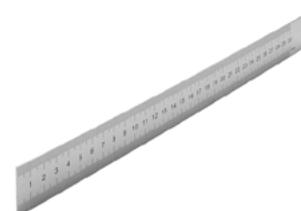**ADJUSTABLE SQUARE****Adjustable square**

- High positioning accuracy thanks to four stainless steel ball detent positions (45°, 90°, 135°, 180°)
- Foldable, easy to store
- Hardened stainless steel tongue with deep-etched scale on both sides

**Ordering data**

Type	Qty.	Order No.
ADJUSTABLE SQUARE	1	2888450000



**AUTOMATIC CENTRE PUNSH****Automatic centre punch**

- Self-impacting
- Adjustable impact force
- Replaceable tip

**Ordering data**

Type	Qty.	Order No.
AUTOMATIC CENTRE PUNSH	1	2888460000

**SCRIBER****Scriber**

- With carbide tip
- Incl. pocket clip

**Ordering data**

Type	Qty.	Order No.
SCRIBER	1	2888470000



# Automatic machines

<b>Automatic machines</b>	
Klippon® Automated RailAssembler	I.2
Klippon® Automated RailCutter	I.4
Wire Processing Center (WPC)	I.6
Introduction automatic machines	I.12
Cable cutting machines	I.18
Automatic strippers	I.19
Stripping and crimping machines	I.21

# Your advantage through innovative technologies

## The cost-effective system for fully automated terminal block assembly



### Maximum flexibility

The universal magazines can be loaded with various components due to its universal design. Hereby maximum flexibility in operation is guaranteed. The machine has a total of 48 magazine positions for components as well as 20 positions for pre cut mounting rails.

### Reliable quality

A continuous use of planning data from eCAD programs is possible through the Weidmüller Configurator (WMC). Due to the omission of the manual production steps, error potentials are minimized.

### Contour robust gripper

Due to the adaptive gripper even complex component geometries can be handled robustly. Thus, the application range of the machine is maximized.



### Optimized handling

Due to the generous storage capacity of the magazines filling processes are reduced to a minimum while also avoiding open quantities. Furthermore, the magazines already enable a fixed hold of individual components during the loading procedure. Consequently, the components cannot fall over on the magazine.

### Matching assortment

Based on the Weidmüller standard markers a suitable portfolio of the Klippon® Connect A-Series with pre-assembled markers is available. In combination with the Klippon® Automated RailLaser for fully automatic marking, the full optimization potential can be reached.

### Consistent transparency

The consistent software support during all work steps assists the operator and ensuring transparency on the order status.

Perfect for  
**200.000**  
terminal blocks  
per year



#### Technical data

Supply voltage	400V AC / 16 A / 3.25 kW
Dimensions machine (W × H × D)	2400 x 2100 x 2100 mm
Dimensions output platform (W × H × D)	2100 x 1400 x 1250 mm
Installation area (W × D)	5700 x 5700 mm
Weight	2200 + 200 kg output platform
Interfaces	USB, Ethernet
Software	Weidmüller Configurator WMC
Mounting rail length	100 - 1200 mm
Component magazine positions	48
Mounting rail magazine positions	20
Compressed air supply	6 bar / 1m³/h

#### Ordering data

Type	Order No.
RAILASSEMBLER	2738690000

More technical details and  
further labelling systems can  
be found at our website.



# Automatically, quickly and precisely cutting of mounting rails

## Klippon® Automated RailCutter


Optimal solutions for cabinet building manufacturers: With the Klippon® Automated RailCutter, time-consuming manual rail cutting is a thing of the past! This fully automatic machine cuts DIN rails with millimeter precision and, if desired, directly marks them – ensuring perfectly cut rails that fit seamlessly into the control cabinet.

The Klippon® Automated RailCutter receives all necessary data directly from the eCAD system via the Weidmüller Configurator (WMC), eliminating the need for manual operation. Each cut is executed quickly and accurately. As an extension of the Klippon® Automated RailAssembler, the RailCutter is the first and only solution for fully automated rail cutting.



### Long-term Cost Efficiency

The automated rail cutting system optimizes your efficiency in a sustainable way. With a precise, electrically driven cutting mechanism, the system reduces scrap and minimizes errors. Additionally, production volumes can be easily and flexibly scaled thanks to automation – ensuring maximum efficiency and a future-proof investment.

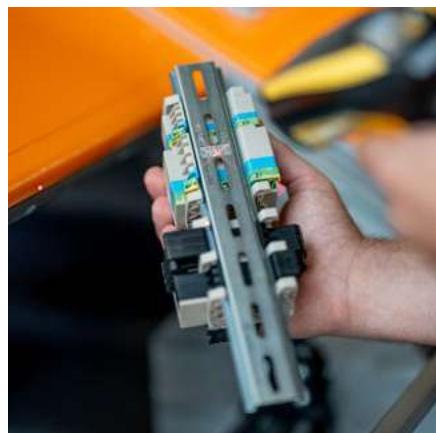

### Maximum transparency

The RailCutter applies a precise needle embossing on the backside of each DIN rail, ensuring they are always easily identifiable. This marking not only enhances traceability but also seamlessly supports further processing, such as by the Klippon® Automated RailLaser – ensuring a continuous and transparent process chain.



### Minimised set-up times

The RailCutter processes DIN rails up to 2 meters in length fully automatically, with an impressive storage capacity of up to 88 meters. Compatible with TS 35 / 7.5 and TS 35 / 15, the RailCutter ensures an efficient workflow and saves valuable setup time.



### Technical data

Supply voltage	400V AC / 6A through the RailAssembler
Machine dimensions (W x H x D)	1200 x 2000 x 2423 mm
Space requirement (W*D)	2423 x 2600 mm
Weight	885 kg
Interface	USB, Ethernet
Software	Weidmüller Configurator WMC
Permitted DIN rail types	TS 35/7,5 and TS 35/15 / 2m / Steel
DIN rail capacity	88 m
Length of cuts	100-1200 mm
Compressed air supply	6 bar / 0,025 m³/h through the RailAssembler

### Technical data

Type	Order No.
RAILASSEMBLER INCL. RAILCUTTER	2994740000
RAILCUTTER RETROFIT*	2994760000
RAILASSEMBLER INCL. RAILCUTTER US VERSION	2994750000
RAILCUTTER STANDALONE US VERSION	2994780000

\* Retrofitting to an existing RailAssembler

More technical details and further labelling systems can be found at our website.



# The Wire Processing Center in detail

## Consistent system for semi-automated cable assembly

The modular WPC combines all advantages of the individual components such as cable processing machines and industrial printers in a holistic, process-oriented approach. Thus creating significant value adding benefits for the panel builders.

The WPC can be either implemented directly as a complete systems approach or step by step - starting firstly with single individual machines - evolving to the systems approach later on.



**The compact bundling**

module gives the worker the option to easily bundle the finished conductors in a certain order for the subsequent wiring step

**Integration of several machines and printers**  
in the WPC, depending on the application – e.g., one or more CUTFIX PRO, CUTFIX PRO FEEDER, CRIMPFIX R VARIO, CA 100 DUO, or THM MultiMark

**Stand-alone function of all devices**

all machines and printers can be used in its single functionality

**Further customizing options**

thanks to the open profile system and additional connections for USB, mains and compressed air



**Handling-Video:**

Wire Processing Center

<http://www.weidmueller.com/wpc-handling>

# Wire Processing Center


The flexible all-rounder with a wide variety of possible applications for use



High flexibility with consistently high quality



Intelligent user guidance and easy operation

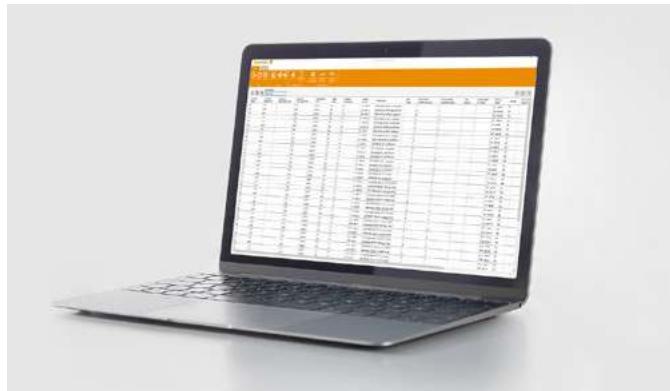

Planning software WPC tool



Customizing and stockpiling



Bundling module for finished conductors



Cable feeding wagon

The Wire Processing Center (WPC) combines the highest quality standards and efficiency gains with low cost and time expenditure. Software-controlled, semi-automated cable assembly speeds up the production process significantly and guarantees the highest quality requirements.

Consistent data consistency, including consistency checks in the WPC tool, automated processing in the one-piece flow concept on the WPC itself, as well as outstanding flexibility through the use of all individual devices in stand-alone mode are the basis for efficiency gains.



### Excellent quality

The WPC offers consistently high quality through the use of semiautomated machines.



### Effiziente Zeitsparnis

The use of automatic machines decreases processing times and thus contributes to a general increase in manufacturing process efficiency.



### High flexibility

Individual components of the WPC can be removed easily and quickly from the process sequence and used with their individual functions in stand-alone mode.



### Multiple feeding unit

Up to 12 conductors can be installed at the multiple feeding unit and bring flexibility and efficiency to the next level and thereby the overall degree of automatization.



### Bundling module



Optional bundling module to pass the finished conductors in a certain order for the subsequent wiring step.



### Cable feeding wagon



Transport wagon and storage module for up to 8 cables on roll and 4 big boxes for safe transport of the conductors to the cutting machine.





## WPC-Tool

### Planning software with integrated consistency check

The planning software WPC tool is the link between data planning and processing in production. The eCAD data can be imported into the WPC tool in different ways. In addition to manual entry, the data can also be read directly from Eplan, Zuken E3 or WSCAD. There is also the option to transfer the CSV files (also generated from other eCAD programs) to the planning software.

Weidmüller provides a suitable template with a corresponding arrangement of the individual parameters. This can also be used to process data from existing Excel files. Before the data is transferred to the WPC (via the network or a USB stick), a consistency check is carried out which checks all core parameters, such as cable length, wire end processing, number and labelling data, for completeness. This ensures reliable processing of the cable jobs on the WPC.

#### Visualisierung der Jobs am Touch Display

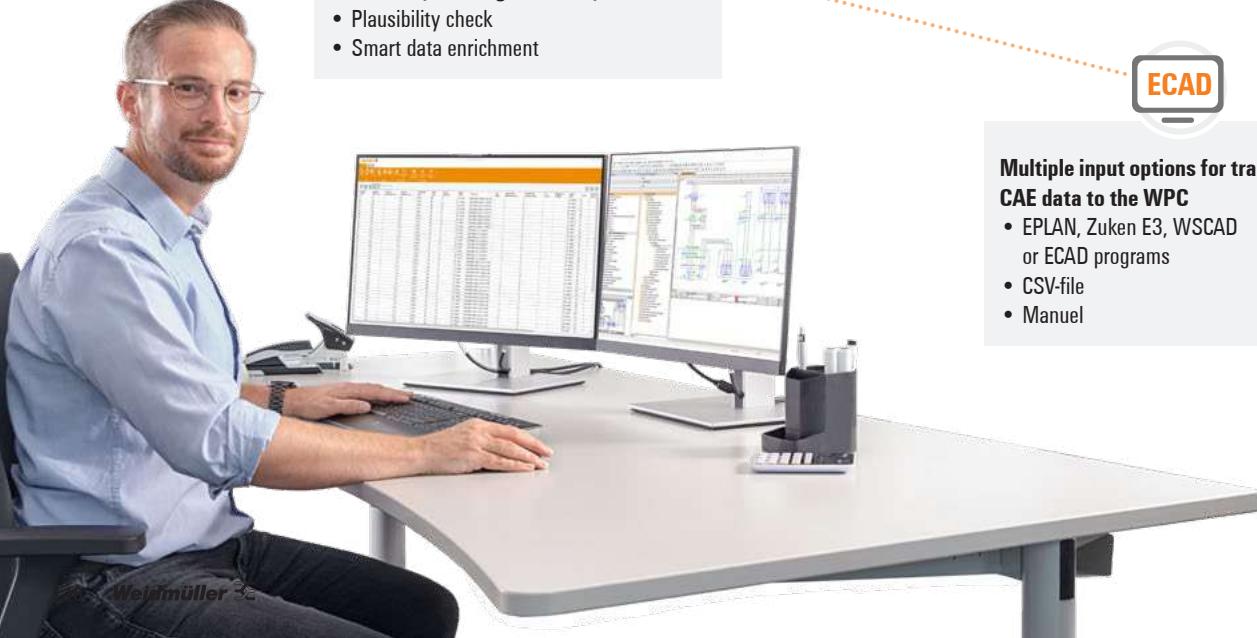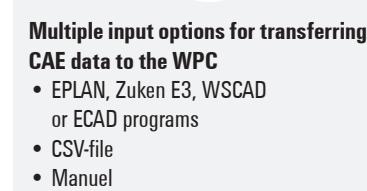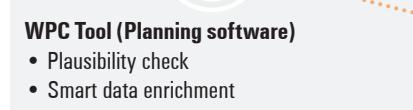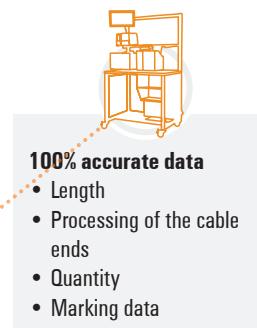

## Wire Processing Center

### Technical data

Crimping length	Cross-section range	Electrical connection	Compressed-air connection
8/10 mm	0.5 - 2.5 mm <sup>2</sup> (~AWG 20-14)	100 - 240 V / 50/60 Hz / 16 VA	5.5 bar

### Ordering data

Products	Description of article	Order No.
	Wire Processing Center (WPC) Modular system for cable assembly with integrated software (workshop trolley, Cutfix PRO, Crimpfix R VARIO, THM MultiMark), 230 V	2634120000
Wire Processing Center Feeder (WPC)	Modular system for cable assembly with integrated software (workshop trolley, Cutfix PRO FEEDER, Crimpfix R VARIO, THM MultiMark), 230 V	2816420000
Wire Processing Center (WPC) 115 V	Modular system for cable assembly with integrated software (workshop trolley, Cutfix PRO, Crimpfix R VARIO, THM MultiMark), 115 V	2728490000
Wire Processing Center Feeder (WPC) 115 V	Modular system for cable assembly with integrated software (workshop trolley, Cutfix PRO FEEDER, Crimpfix R VARIO, THM MultiMark), 115 V	2816430000

### Ordering data

Products	Description of article	Order No.
	WPC WAGON Workshop trolley (empty trolley with display, panel, shelving system for wire end ferrules and markers)	2634140000
	WPC WAGON 115V Workshop trolley (empty trolley with display, panel, shelving system for wire end ferrules and markers)	2728480000
	WPC KBZF C Cable entry Option C	3008340000
	WPC GFSN Gripper tray station	2666400000
	WPC FEEDING Cable feeding wagon for the cutting machine	2901930000
	WPC BUNDLER Bundling module for finished conductors	2901940000
	WPC CABINET Cabinet for the WPC	2883890000
	WPC DISPLAY 24" touch display for the WPC	2883900000
	WIRE FEEDER Conductor dereeler system	3064910000
	WIRE FEEDER COIL Conductor dereeler system bigger cross-sections	3064920000
	WF PLATE 1 Mounting plate 1	3064930000
	WF PLATE 2 Mounting plate 2	3064940000
	WF PLATE 3 Mounting plate 3	3064950000

More technical details and further labelling systems can be found in our online catalogue.



# Semi-automated cable assembly for simple and precise cutting to length

## CUTFIX PRO FEEDER: Fast. Flexible. Electric.

The growing demand of many customers for faster availability, increasing quality, and higher cost efficiency pose major challenges for control cabinet construction. Semi-automated solutions from Weidmüller increase speed, efficiency, and flexibility in all aspects of cable confection.

The purely electrically operated CUTFIX PRO and CUTFIX PRO FEEDER enable simple and precise cutting to length of flexible conductors in the cross-section range 0.08 to 10.00 mm<sup>2</sup> (AWG 40-8). The cutting jobs can be read in with the included software or entered quickly and easily on the display of the machine. In addition, the machine can be easily integrated into Weidmüller's modular Wire Processing Center (WPC) for even greater effectiveness.



### Special features:

- Compact automatic cutting machine in robust design.
- Touch display for easy handling and visualisation
- Optionally addable multiple feeder

#### Optional multiple feed


The CUTFIX PRO can optionally be extended with a multiple feeder to the CUTFIX PRO FEEDER. This provides additional advantages in terms of efficiency and flexibility in stand-alone operation and when integrated into the Weidmüller Wire Processing Center (WPC).



**GERMAN  
DESIGN  
AWARD  
WINNER  
2022**

**Simple operation**

The 5-inch touch display of the CUTFIX PRO makes it easy to operate and is so clear that you can keep an eye on all the machine's cutting jobs.

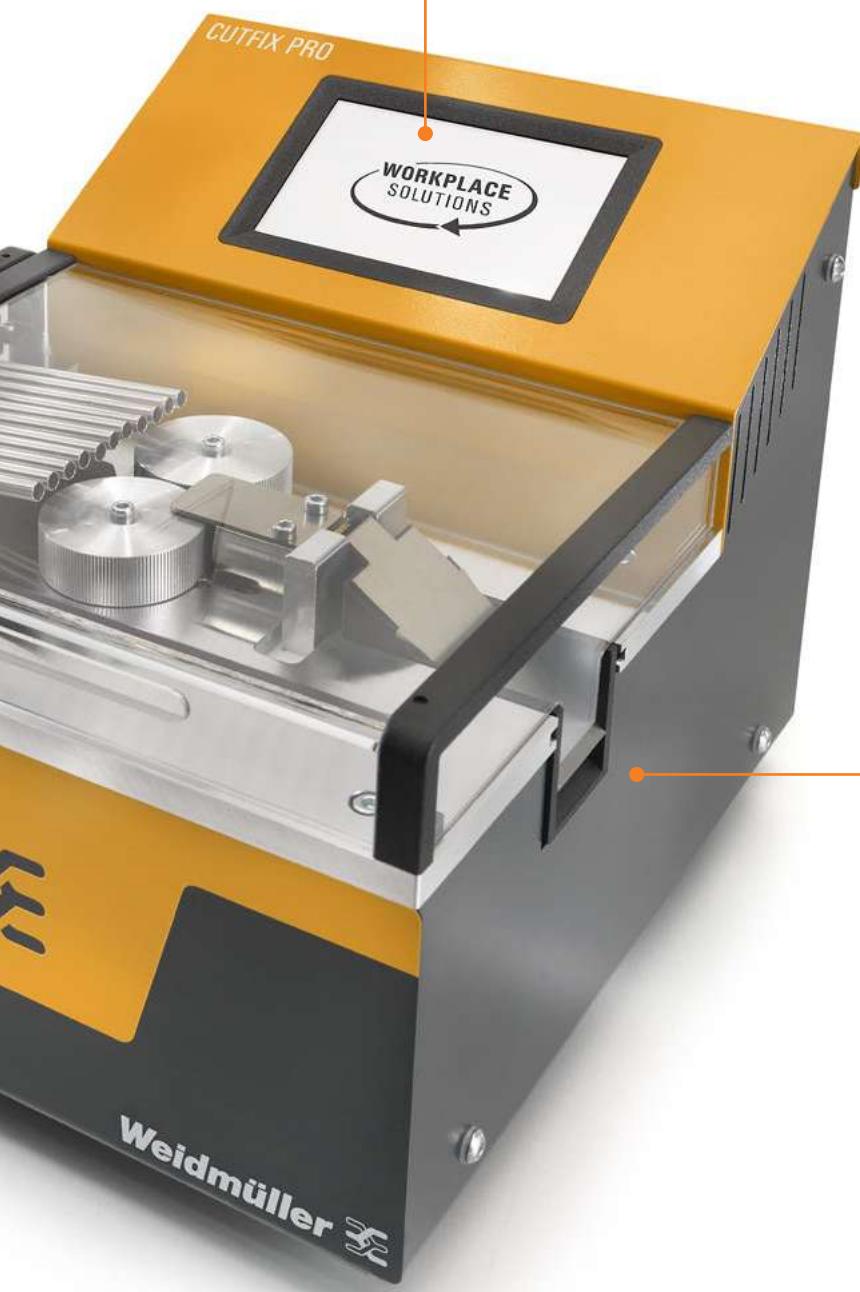**Compact design**

The extremely compact CUTFIX PRO only has the footprint of an A4 page and can therefore be used flexibly even in confined spaces. Its robust metal components ensure a long service life.

**Handling-Video:**

CUTFIX PRO FEEDER

[www.weidmueller.com/cutfix-pro-feeder-handling](http://www.weidmueller.com/cutfix-pro-feeder-handling)

# Higher level of automation for standardised stripping and crimping

The progressive automation of individual work steps and processes has now become a key factor with respect to sustainable corporate success. Shortened installation times translate into minimised production costs, enhanced added value and thus greater corporate competitiveness.

We at Weidmüller have been developing stripping, crimping and cutting machines for more than 30 years. We make sure that they satisfy ever-growing industrial requirements, with pioneering standards and innovative ideas. Our latest generation of machines are distinct in that they are especially easy to use and feature robust designs.

The new CRIMPFIX R VARIO allows for the reliable processing of wire end ferrules on reels. All cross-sections from 0.5 up to 2.5 mm<sup>2</sup> (AWG 20 – 14) have been pre-installed and allow for optimal operating convenience with changing cross-sections.



## Touchscreen display

Display of counter readings (daily, total and service counters). One-touch switching of the cross-sections on the display.



**Loading of wire end ferrules**

Simultaneous setting of all five cross-sections. Combined insert with Weidmüller wire end ferrules (standard and special collar sizes).

**Robust design**

The new more robust design extends the service life of the automatic machines as well as the maintenance intervals.

**Handling-Video:**

Crimpfix R Vario

[www.weidmueller.com/crimpfix-r-vario-handling](http://www.weidmueller.com/crimpfix-r-vario-handling)

# You are streamlining your manufacturing processes

## Our automatic machines optimise installation times

	Cutting machine	Stripping machine	Stripping and crimping machines			
	CUTFIX PRO / CUTFIX PRO FEEDER	POWERSTRIPPER 6 / POWERSTRIPPER 16	CRIMPFIX ECO	CRIMPFIX R	CRIMPFIX R VARIO	CRIMPFIX L / CRIMPFIX LS
<b>Order number</b>	<b>2797190000 / 2797200000</b>	<b>9028510000 / 9028480000</b>	<b>2833890000</b>	<b>9028500000</b>	<b>2580000000</b>	<b>9028530000 / 9028540000</b>
<b>Electrical connections</b>	100 - 240 V 50 - 60 Hz	100 - 240 V 50 - 60 Hz	100 - 240 V 50 - 60 Hz	100 - 240 V 50 - 60 Hz	100 - 240 V 50 - 60 Hz	100 - 240 V 50 - 60 Hz
<b>Cycle time</b>	max. 1.0 m / sec.	0.5 sec.	< 1,5 sec.	1.5 sec.	~ 2 sec.	1.5 sec.
<b>Insertion length</b>	-	22 mm + crimping length	35 mm	35 mm	27mm + crimping length	35mm/27mm+crimping length
<b>Pull of length</b>		3 - 20 mm				
<b>Quantity in total per year</b>	up to 200,000		up to 100,000	up to 400,000	up to 400,000	up to 400,000
	CUTFIX PRO   CF PRO FEEDER	PS 6   PS 16				
0.14 mm <sup>2</sup> / AWG 26	x	-	x	-	-	-
0.25 mm <sup>2</sup> / AWG 24	x	-	x	-	-	-
0.34 mm <sup>2</sup> / AWG 22	x	-	x	-	-	-
0.5 mm <sup>2</sup> / AWG 20	x	x	x	-	x	x
0.75 mm <sup>2</sup> / AWG 18	x	x	x	-	x	x
1.0 mm <sup>2</sup> / AWG 17	x	x	x	-	x	x
1.5 mm <sup>2</sup> / AWG 16	x	x	x	-	x	x
2.5 mm <sup>2</sup> / AWG 14	x	x	x	x	x	x
4.0 mm <sup>2</sup> / AWG 12	x	x	x	x	-	-
6.0 mm <sup>2</sup> / AWG 10	x	x	x	x	-	-
10.0 mm <sup>2</sup> / AWG 8	x	x	-	x	-	-
16.0 mm <sup>2</sup> / AWG 6	-	-	x	-	-	-
<b>Cable types</b>	PVC, MTW, THHN, MTE, AWG, UL halogen free other soft/medium and hard insulation.	PVC, MTW, THHN, MTE, AWG, UL halogen free other soft/medium and hard insulation.	PVC	PVC, MTW, THHN, MTE, AWG, UL halogen free other soft/medium and hard insulation.	PVC, MTW, THHN, MTE, AWG, UL halogen free other soft/medium and hard insulation.	PVC, MTW, THHN, MTE, AWG, UL halogen free other soft/medium and hard insulation.
<b>Ferrule type</b>	-		Ferrules on reel	Ferrules on reel	Ferrules on reel	Loose ferrules   Loose ferrules
S type with bigger plastic collar	-		-	x	x	x   x
Longer and shorter ferrules	-		-	-	x	-   x
Ferrules without plastic collar	-		-	-	-	-   -
Twin ferrules	-		-	-	-	-   -
<b>Crimping length</b>	-		Standard 8 mm	Standard 8 mm	8 and 10 mm	8 mm   6, 8 and 10 mm
<b>Wire crimp shape</b>			Trapezoidal	Trapezoidal optional PZ 3	Trapezoidal optional PZ 3	Trapezoidal optional PZ 3
<b>Air pressure</b>	Electrical driven	Electrical driven	Electrical driven	5 - 5.5 bar	5 - 5.5 bar	5 - 5.5 bar
<b>Minor customer service</b>	200,000 cycles	500,000 cycles	100,000 cycles	400,000 cycles	400,000 cycles	400,000 cycles
<b>Major customer service</b>			250,000 cycles	800,000 cycles	800,000 cycles	800,000 cycles
<b>Dimension in mm</b>	305 x 250 x 250 / 305 x 365 x 250	295 x 190 x 190 / 295 x 190 x 230	230 x 323 x 188	330 x 390 x 430	485 x 335 x 565	330 x 390 x 430
<b>Weight</b>	10 kg / 13.5 kg	8.8 kg / 11 kg	11 kg	23 kg	22 kg	31 kg
<b>Changeover ferrule size</b>	CUTFIX PRO = manually CUTFIX PRO FEEDER = Software controlled	Turn blad adjustment knob	Change reel of ferrules, mechanical changeover for cross-section change	Change reel of ferrules	No mechanical changes needed for varying cross sections. Simple touch one display. Easy adjustment for different crimping length.	Change ferrules Change oscillating conveyor Adjust single unit; LS: Adjust mechanics
<b>Other</b>	Optional retrofitting of the CUTFIX PRO to the CUTFIX PRO FEEDER possible in the WM Service Interface for integration into the Wire Processing Center available	Optional versions possible after prior evaluation: • special stripping blades • special lengths		Optional magazine for 5 rolls can be retrofitted (Order No. 2443370000)	Interface for integration into the Wire Processing Center available	Order number AEH pot: • 1440540000 (0.5 - 1.5mm <sup>2</sup> /AWG20-16) • 1440550000 (1.5 - 2.5mm <sup>2</sup> /AWG16-14)

**UL-certified crimp connection**

The UL certification for our crimped, insulated wire- end ferrules means that Weidmüller has opened up an amazing number of possible applications for use around the world. The UL approval is valid for wire- end ferrules, manual tools and crimping machines from Weidmüller, as an overall system.

**Crimping machine**

CRIMPFIX LZ	CA 100 C	CA 100 2.5/ CA 100 10	CA 100 DUO/ CA 100 DUO S	CA Indent	POWERCRIMPER 6.0	POWERCRIMPER VARIO
<b>9027310000</b>	<b>On request</b>	<b>On request</b>	<b>2740900000/ 2912430000</b>	<b>On request</b>	<b>2634310000</b>	<b>3032890000</b>
100 - 240 V	100 - 240 V	100 - 240 V	100 - 240 V /	100 - 240 V	100 - 240 V	100 - 240 V
50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 65 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
1.5 sec.	1.5 sec.	2.5 sec.	2.5 - 3 sec.	2.5 sec.	1.0 sec.	< 1.5 sec.
35 mm	16 mm + crimping length	28 mm + crimping length	28 mm + crimping length	36 mm	13 mm + crimping length	30 mm
up to 400,000	up to 1,000,000	up to 1,000,000	up to 1,000,000	up to 1,000,000	up to 400,000	up to 500,000
		CA 100 2.5   CA 100 10				
-	x	-   -	-   -	x	-	-   -
-	x	-   -	-   -	x	-	-   -
-	x	x   -	-   -	x	-	-   -
x	-	x   -	-   -	x	x	-   -
x	-	x   -	-   -	x	x	-   -
x	-	x   -	-   -	x	x	-   -
x	-	x   -	-   -	x	x	-   -
-	-	x   x	optional	x	optional	x   -
-	-	-   x	x   x	x   optional	x   x	x   x
-	-	-   x	x   optional	optional	-	-   x
-	-	-   optional	-   -	-	-	-   x
PVC, MTW, THHN, MTE, AWG, UL halogen free other soft/medium and hard insulation.	PVC, MTW, THHN, MTE, AWG, UL halogen free other soft/medium and hard insulation. Can be equipped with V-radius blades for special cables as well.	PVC, MTW, THHN, MTE, AWG, UL halogen free other soft/medium and hard insulation. Can be equipped with V-radius blades for special cables as well.	PVC, MTW, THHN, MTE, AWG, UL halogen free other soft/medium and hard insulation. Can be equipped with V-radius blades for special cables as well.	PVC, MTW, THHN, MTE, AWG, UL halogen free other soft/medium and hard insulation. Can be equipped with V-radius blades for special cables as well.	Independent of conductor insulation.	Independent of conductor insulation.
Loose ferrules	Loose ferrules	Loose ferrules	Loose ferrules	Loose ferrules	Loose ferrules	Loose ferrules
- optional	optional	-	-		x	x
- x	x	x	x		x	-
- optional	optional	optional	-		x	x
x -	optional	-	-		x	x
8 mm	6 and 8 mm	6, 8, 10, 12 mm	10, 12, 18 mm	8, 10, 12 and 18 mm	6 - 18 mm	12 mm
Trapezoidal	Trapezoidal optional PZ 3	Quadro optional Trapezoidal	Trapezoidal optional Quadro	Trapezoidal	4 Indent	Square
5 - 5.5 bar	5 - 5.5 bar	5 - 5.5 bar	5 - 5.5 bar	5 - 5.5 bar	5 - 5.5 bar	Crimping die used accordingly - CTI 6 G Crimp - PZ 16 Crimp
400,000 cycles	-	-	-	-	400,000 cycles	-
800,000 cycles	1,000,000 cycles	1,000,000 cycles	1,000,000 cycles	1,000,000 cycles	800,000 cycles	500,000
330 x 390 x 430	260 x 390 x 390	530 x 400 x 460	550 x 415 x 440	530 x 400 x 460	165 x 504 x 240	190 x 300 x 220 mm
31 kg	23 kg	40 kg	40 kg	40 kg	11.5 kg	9 kg
Change ferrules Change oscillating conveyor Adjust single unit Change filler	Change ferrules Change holding unit Change oscillating conveyor Change single unit Adjust mechanic	Different tooling changes necessary per cross section, Adjust mechanic	Different tooling changes necessary per cross section combination, Adjust mechanic	Holding unit pin and socket and wire fixing unit	Turning the setting wheel	Changing the adapters and inserts
	Order number conversion kits: • 1314530000 (0.14mm <sup>2</sup> /AWG26) • 1314520000 (0.25mm <sup>2</sup> /AWG24) • 1314510000 (0.34mm <sup>2</sup> /AWG22)	Order number AEH pot: • 1477050000 (0.5 - 1.0mm <sup>2</sup> /AWG20-17) • 1447040000 (1.5 - 2.5mm <sup>2</sup> /AWG16-14)	Order number conversion kits: • 2769020000 (4+6mm <sup>2</sup> /AWG12+10) • 2769030000 (4+10mm <sup>2</sup> /AWG12+8)	Order number conversion kits: • 2912440000 (4 - 10mm <sup>2</sup> /AWG12 - 8) • 2912450000 (6 - 10mm <sup>2</sup> /AWG10 - 8)	Further types of contacts possible after evaluation	Other contact types possible after previous testing

**CUTFIX PRO**

Cable cutting machine



The purely electrical driven CUTFIX PRO enables a simply and precise cutting of flexible conductors in the range of 0.08 - 10mm<sup>2</sup> (AWG 40-8). Cuttings jobs can be easily transmitted via the containing software or simply being added at the display of the automatic machine.

- Compact design and high robustness
- Usability and visualisation
- Optional multiple feeding unit
- Implementation into Weidmüller Wire Processing Center (WPC)

**Technical data**

CUTFIX PRO		
<b>Cutting capacity</b>		
Flexible	0.08 - 10 mm <sup>2</sup> (AWG 28-8)	
Solid	0.08 - 2.5 mm <sup>2</sup> (AWG 28-14)	
Aperture	Max. 8 mm outer Ø	
Feed rate	1.0 m/sec	
Display	5" Touch Display	
Length preselection	1 mm to 999999 mm	
Memory	For up to 9.999 cutting jobs	
Interface	USB A, USB B, Network, Serial	
Software	For data transfer to PC	
Electrical connection	100-240 V AC, 50/60 Hz	
Connected load	100 VA	
Dimensions D x W x H (mm)	250 x 300 x 250 mm	
Weight	Approx. 10 kg	

**Ordering data**

Type	Qty.	Order No.
CUTFIX PRO	1	2797190000
URS FEEDING UNIT CF PRO	1	on request

**CUTFIX PRO FEEDER**

Cable cutting machine with multiple feeding unit



The purely electrical driven CUTFIX PRO FEEDER enables a simply and precise cutting of flexible conductors in the range of 0.08 - 10mm<sup>2</sup> (AWG 40-8). Cuttings jobs can be easily transmitted via the containing software or simply being added at the display of the automatic machine. The implemented multiple feeding unit enables to process up to 12 conductors.

- Compact design and high robustness
- Usability and visualisation
- Interfaces for WPC approach

**Technical data**

CUTFIX PRO FEEDER		
<b>Cutting capacity</b>		
Flexible	0.08 - 10 mm <sup>2</sup> (AWG 28-8)	
Solid	0.08 - 2.5 mm <sup>2</sup> (AWG 28-14)	
Aperture	flexible 11x 0.5 - 2.5 mm <sup>2</sup> (AWG 20-14), 1x 4 - 10 mm <sup>2</sup> (AWG 12-8)	
Feed rate	1.0 m/sec	
Display	5" Touch Display	
Length preselection	1 mm to 999999 mm	
Memory	For up to 9.999 cutting jobs	
Interface	USB A, USB B, Network, Serial	
Software	For data transfer to PC	
Electrical connection	100-240 V AC, 50/60 Hz	
Connected load	100 VA	
Dimensions D x W x H (mm)	370 x 300 x 250 mm	
Weight	Approx. 13,5 kg	

**Ordering data**

Type	Qty.	Order No.
CUTFIX PRO FEEDER	1	2797200000

**Automatic strippers**

- Stripping of stranded wires according to DIN VDE 0295, Cl. 5
- Partial stripping; the insulation remains on the wire end.
- No need to change tools
- Electric drive
- For small and medium-sized batches
- Precise adjustment possible through touch display
- Day and total unit counter ensures production monitoring

Automatic machines are designed to process wires acc. to DIN VDE 0295/5, DIN VDE 0281/102 and DIN VDE 0281/103.

Processing of other wire types on request.

**Powerstripper 6.0**0.05 ... 6.0 mm<sup>2</sup>**Powerstripper 16.0**2.5...16.0 mm<sup>2</sup>**Powerstripper 6.0**

- Quick and easy adjustment to the respective cross-section
- Stripping length: 3...20 mm
- Min. conductor length: 22 mm + stripping length
- Max outer diameter 5mm

**Powerstripper 16.0**

- Quick and easy adjustment to the respective cross-section
- Stripping length: 3...20 mm
- Min. conductor length: 22 mm + stripping length
- Max outer diameter 8 mm

**Technical data****Specification**

Stripping range  
Conductor length, min.  
Pull-off length  
Pulse time  
Electrical connection

**Tool data**

Depth / Width / Height  
Weight

**Note****Ordering data****Version****POWERSTRIPPER 6.0**

0.05 - 6.0 mm<sup>2</sup> (~AWG 30-10)  
22 mm + stripping length  
3-20 mm  
approx. 0.5 s  
100-240 V / 50/60 Hz / 70 VA

**POWERSTRIPPER 16.0**

2.5 - 16 mm<sup>2</sup> (~AWG 14-6)  
22 mm + stripping length  
3-20 mm  
approx. 1.5 s  
100-240 V / 50/60 Hz / 100 VA

**Note****Accessories**

Spare blade

**Note**

Type	Qty.	Order No.
POWERSTRIPPER 6.0	1	9028510000

Type	Qty.	Order No.
POWERSTRIPPER 16.0	1	9028480000

Type	Qty.	Order No.
AIMESA V	1	9050180000

Type	Qty.	Order No.
AIMESA V	1	9050180000

**Automatic strippers**


- Electro-pneumatic drive
- Precise sheath stripping on conductors with various insulation types
- Very easy to use

**Powerstripper AM 12**

3.5...11.9 mm

**Powerstripper AM 12**

- Stripping a cable with an outside diameter of 3.5 ... 11.9 mm
- Use of wire cross-sections with adapted V-radius blades
- Infinitely variable adjustment of sheath stripping and pull-off lengths between 25 and 120 mm
- Low weight and compact design
- Easy blade replacement
- 4-fold star-blade for various conductor diameters, V-Radius blades in 3.49 / 4.37 / 6.20 / 7.70 mm

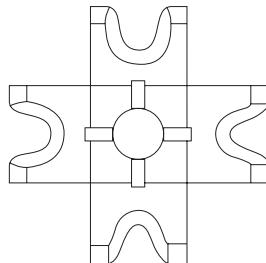**Technical data****Specification**

Insertion length	80 mm
Min./max. stripping area	3.5 mm-11.90
Min./max. stripping length	25-120
Pull-off length	20 - 120 mm
Electrical connection	100 - 240 V / 50/60 Hz / 16 VA
Compressed-air connection	5 - 5.5 bar
Pulse time	approx. 3 s

**Tool data**

Depth / Width / Height	230 / 254 / 520 mm
Weight	17 kg

**Note****Ordering data****Version****POWERSTRIPPER AM 12**

80 mm
3.5 mm-11.90
25-120
20 - 120 mm
100 - 240 V / 50/60 Hz / 16 VA
5 - 5.5 bar
approx. 3 s

**Note****Accessories****Note****Type****Qty.****Order No.**

POWERSTRIPPER AM 12 1 1534740000

**Type****Qty.****Order No.**

4-FOLD BLADE PS AM 12 1 2819820000

For POWERSTRIPPER AM 12 from serial number 2019.

**Crimping machines****Powercrimper 6.0:**

- Powercrimper 6.0 is an automatic crimping machine for the crimping range 0.5 - 6 mm<sup>2</sup> (AWG 20 - 10)

**Powercrimper 6.0**0.5...6 mm<sup>2</sup>**Powercrimper 6.0**

- Flexible applications in wire-end ferrule processing
- Short pulse times and easy handling
- Robust and a long service life
- Ferrules with and without plastic collar 0.5 - 6 mm<sup>2</sup> (AWG 20-10)
- Twin ferrules 0.5 - 6 mm<sup>2</sup> (AWG 20-10)
- Air pressure necessary

**Powercrimper Vario**0.5...2.5 mm<sup>2</sup>**Powercrimper Vario**

- Purely electrical driven crimping machine
- Different inserts for insulated connectors up to 6 mm<sup>2</sup> (AWG10) or optional wire end ferrules 6-16 mm<sup>2</sup> (AWG10-6)
- Short cycle times (approx. 1.0 s)
- Simple, intuitive and user-friendly operation
- Compact design
- Robustness and longevity

**Technical data****Specification**

Stripping range
Crimping length
Pulse time
Cross-section range
Electrical connection
Compressed-air connection

**Tool data**

Depth / Width / Height
Weight

**Note****Ordering data****Version****POWERCRIMPER 6.0**

0.5-6 mm <sup>2</sup> (AWG 20-AWG 10)
6 - 18 mm
approx. 1 s
0.5...6 mm <sup>2</sup>
100 - 240 V / 50/60 Hz / 16 VA
5 - 5.5 bar

**POWERCRIMPER VARIO**

0.5-6 mm <sup>2</sup> (AWG 10-AWG 6)
12 mm
approx. 1 s
0.5...6 mm <sup>2</sup>
100-240 V / 50/60 Hz / 100 VA

**Note****Accessories**

Gripping tray
Adapter for dies of the HTO series
Crimp die wire end ferrules 6 - 16 mm <sup>2</sup>
Note

**Type****Qty.****Order No.**

POWERCRIMPER 6.0

1

2634310000

**Type****Qty.****Order No.**

POWERCRIMPER VARIO

1

3032890000

**Type****Qty.****Order No.**

STORAGEBOX PCV

1

3043810000

ADAPTER PCV HTO

1

3064900000

EINSATZPAAR PZ 16E

1

9012640000

**Stripping and crimping machines****CRIMPFIX ECO:**

- Purely electrically driven for processing harmonised PVC conductors
- Crimping range of 0.5 - 2.5 mm<sup>2</sup> (AWG 20 - 14)
- Weidmüller wire-end ferrules on reel
- Adjustable stripping blades
- Integrated day, total and service counter
- No tool change required when changing the cross-section range
- Simple modification of the machine parameters for the entire crimping range

**CRIMPFIX ECO****CRIMPFIX ECO**

- Pure electrical driven crimping machine for harmonized PVC cables
- Crimping range 0.5 - 2.5 mm<sup>2</sup> / AWG20 - 14
- WM ferrules on reel (L2 = 8 mm)
- Crimp shape: trapezoidal
- 5 crimp stations with aligned stripping parameters
- Implemented daily, total and service counter (250.000 cycles)
- No change of components necessary for varying cross-sections
- Simple changes of machine parameters for different cross-sections

**Technical data****Specification**

Stripping range	0.5 - 2.5 mm <sup>2</sup> (~ AWG 20-14)
Crimping length	8 mm
Pulse time	approx. 1.5 s
Cross-section range	0.5...2.5 mm <sup>2</sup>
Electrical connection	100-240 V / 50/60 Hz / 100 VA
Compressed-air connection	

**Tool data**

Depth / Width / Height	323 / 230 / 188 mm
Weight	12496 g

**Note****Ordering data****Version****CRIMPFIX ECO**

0.5 - 2.5 mm <sup>2</sup> (~ AWG 20-14)
8 mm
approx. 1.5 s
0.5...2.5 mm <sup>2</sup>

Type	Qty.	Order No.
CRIMPFIX ECO	1	2833890000

**Note**

You can find wire end ferrules in chapter J

## Stripping and crimping machines

- For wire end ferrules with plastic collar on reel
- Conductor stripping and crimping in one step
- Quick adjustment to the required cross-section range
- Change of tools not necessary, therefore efficient and time-saving processing

Automatic machines are designed to process wires according to DIN VDE 0295/5, DIN VDE 0281/102 and DIN VDE 0281/103.

Processing of other wire types on request.

### CRIMPFIX R

0.5...2.5 mm<sup>2</sup>



### CRIMPFIX R

- 0.5 - 2.5 mm<sup>2</sup> / AWG 20-14
- Variable processing of wire end ferrules on reel with standard collar and special size
- Crimping length 8 mm
- Crimping shape PZ 3 optional
- No tool-change required
- 5-fold magazine accessoire available



CRIMPFIX MAGAZINE

### CRIMPFIX R VARIO

0.5...2.5 mm<sup>2</sup>



### CRIMPFIX R VARIO

- 0.5 - 2.5 mm<sup>2</sup> / AWG 20-14
- Variable processing of wire end ferrules on reel with standard collar and special size
- Crimping length 8-10 mm
- Crimping shape PZ 3 optional
- Very simple and uncomplicated operation via touch display
- Magazine filling with 23,000 wire-end ferrules for direct processing

## Technical data

### Specification

Stripping range	0.5 - 2.5 mm <sup>2</sup> (~ AWG 20-14)
Crimping length	8 mm
Pulse time	approx. 1 s
Cross-section range	0.5...2.5 mm <sup>2</sup>
Electrical connection	100-240 V / 50/60 Hz / 25 VA
Compressed-air connection	5 - 5.5 bar

### Tool data

Depth / Width / Height	330 / 390 / 430 mm
Weight	23 kg

### Note

## Ordering data

### Version

### CRIMPFIX R

Type	Qty.	Order No.
CRIMPFIX R	1	9028500000
CRIMPFIX MAGAZIN	1	2443370000

You can find wire end ferrules in chapter J

### CRIMPFIX R VARIO

Type	Qty.	Order No.
CRIMPFIX R VARIO	1	2580000000
CRIMPFIX R VARIO PZ3	1	2912420000

You can find wire end ferrules in chapter J

**Stripping and crimping machines**

- For loose-packed wire-end ferrules with plastic collar
- Conductor stripping and crimping in one step
- Oscillating conveyor for grabbing free wire-end ferrules
- Quick adjustment to the required cross-section range
- Change of tools not necessary, therefore efficient and time-saving processing

Automatic machines are designed to process wires according to DIN VDE 0295/5, DIN VDE 0281/102 and DIN VDE 0281/103.

Processing of other wire types on request.

**CRIMPFIX L / CRIMPFIX LS**0.5...2.5 mm<sup>2</sup>**CRIMPFIX L/LS**

- Change of tools not necessary
- Short pulse times
- Processing also of special wire-end ferrules with a large plastic collar
- Crimp shape: trapezoidal; optional PZ3 crimp
- Crimping length: CRIMPFIX L: 8 mm, CRIMPFIX LS: 6, 8 and 10 mm
- Electric/pneumatic drive
- Fully electronic control
- For medium-sized batches

**CRIMPFIX LZ**2 x 0.5...2 x 1.5 mm<sup>2</sup>**CRIMPFIX LZ****For twin wire-end ferrules**

- Crimping quality in accordance with DIN 46228
- Change of tools not necessary
- Short pulse times
- Crimping length 8 mm
- Electric/pneumatic drive
- Fully electronic control
- For medium-sized batches

**Technical data****Specification**

Stripping range	0.5 - 2.5 mm <sup>2</sup> (~AWG 20-14)
Crimping length	0.5 - 2.5 mm <sup>2</sup> (~AWG 20-14)
Pulse time	8 mm
Cross-section range	approx. 1 s
Electrical connection	0.5...2.5 mm <sup>2</sup>
Compressed-air connection	100-240 V / 50/60 Hz / 110 VA
Tool data	5 - 5.5 bar
Depth / Width / Height	330 / 390 / 460 mm
Weight	31 kg
Note	

**Ordering data****Version****CRIMPFIX L**

0.5 - 2.5 mm <sup>2</sup> (~AWG 20-14)	0.5 - 2.5 mm <sup>2</sup> (~AWG 20-14)
8 mm	6/8/10 mm
approx. 1 s	approx. 1 s
0.5...2.5 mm <sup>2</sup>	0.5...2.5 mm <sup>2</sup>
100-240 V / 50/60 Hz / 110 VA	100-240 V / 50/60 Hz / 110 VA
5 - 5.5 bar	5 - 5.5 bar

**CRIMPFIX LS**

0.5 - 2.5 mm <sup>2</sup> (~AWG 20-14)	0.5 - 2.5 mm <sup>2</sup> (~AWG 20-14)
8 mm	6/8/10 mm
approx. 1 s	approx. 1 s
0.5...1.5 mm <sup>2</sup>	0.5...1.5 mm <sup>2</sup>
100-240 V / 50/60 Hz / 110 VA	100-240 V / 50/60 Hz / 110 VA
5 - 5.5 bar	5 - 5.5 bar

**CRIMPFIX LZ**2 x 0.5...2 x 1.5 mm<sup>2</sup> (~AWG 2x20 - 2x16)

8 mm	approx. 1 s
0.5...1.5 mm <sup>2</sup>	0.5...1.5 mm <sup>2</sup>
100-240 V / 50/60 Hz / 110 VA	100-240 V / 50/60 Hz / 110 VA
5 - 5.5 bar	5 - 5.5 bar
330 / 390 / 460 mm	330 / 390 / 460 mm
31 kg	31 kg

**Type**

CRIMPFIX LZ

1 9027310000

You can find wire end ferrules in chapter J

**Note****Type**

CRIMPFIX L

1 9028530000

CRIMPFIX L PZ3

1 1243790000

CRIMPFIX LS

1 9028540000

CRIMPFIX LS PZ3

1 9025300000

You can find wire end ferrules in chapter J

## Stripping and crimping machines

- For loose-packed wire-end ferrules with plastic collar
- Conductor stripping and crimping in one step
- Oscillating conveyor for grabbing free wire-end ferrules
- Quick adjustment to the required cross-section range via touch display

Automatic machines are designed to process wires according to DIN VDE 0295/5, DIN VDE 0281/102 and DIN VDE 0281/103.

Processing of other wire types on request.

### CA 100 DUO

6-10 mm<sup>2</sup>



- Processing range from 6 to 10 mm<sup>2</sup> (optional 4 mm<sup>2</sup>) in one work step
- Processing of WM wire-end ferrules of various crimping lengths (L2 = 8, 10, 12 und 18 mm)
- Change of tools not necessary
- Selection of the cross section via touch display

### CA 100 DUO S

4-6 mm<sup>2</sup>



- Processing range from 4 to 6 mm<sup>2</sup> (optional 10 mm<sup>2</sup>) in one work step
- Processing of WM wire-end ferrules of various crimping lengths (L2 = 8, 10, 12 und 18 mm)
- Change of tools not necessary
- Selection of the cross section via touch display

## Technical data

### Specification

Stripping range

Crimping length

Pulse time

Electrical connection

Compressed-air connection

### Tool data

Depth / Width / Height

Weight

### Note

## Ordering data

### Version

### CA 100 DUO

6 - 10 mm<sup>2</sup> (4 mm<sup>2</sup> opt.) / AWG 10-8 (AWG 12 opt.)

8 - 18 mm

approx. 3 s

100-240 V / 50/60 Hz / 100 VA

5 - 5.5 bar

550 / 415 / 440 mm

40 kg

### Accessories

Adjustment Set  
Adjustment Set

### Note

### Type Qty. Order No.

CA 100 DUO 1 2740900000

You can find wire end ferrules in chapter J

### CA 100 DUO S

4 - 6 mm<sup>2</sup> (10 mm<sup>2</sup> opt.) / AWG 12-10 (AWG 8 opt.)

6 - 18 mm

approx. 3 s

100-240 V / 50/60 Hz / 100 VA

5 - 5.5 bar

550 / 415 / 440 mm

40 kg

### Type Qty. Order No.

CA 100 DUO S 1 2912430000

You can find wire end ferrules in chapter J

### Type Qty. Order No.

URS CA 100 DUO 4-6MM<sup>2</sup> 1 2769020000

URS CA 100 DUO 4-10MM<sup>2</sup> 1 2769030000

**CA 100 C**0.14...0.34 mm<sup>2</sup>

The CA 100 C ("Compact") is an electro-pneumatic, modular crimping machine used to efficiently process unconnected (bulk-packed) ferrules with plastic collars. It is used for wires with small cross-sections of 0.14 to 0.34 mm<sup>2</sup> (AWG 26 to 22).

- For processing small cross-sections from 0.14 to 0.34 mm<sup>2</sup> (AWG 26 to 22), with 6/8 mm crimping lengths
- The removable control panel makes it convenient to operate and adjust.
- Simple, user-friendly menu navigation and touch-screen display
- Daily piece-part counter
- Short insertion length: 22 mm
- Tool is easy to change
- Quick setup and re-tooling
- Short cycle times: 1.5 s
- Compact design
- Electro-pneumatic
- Optional processing of wire end ferrules without plastic collar possible
- in processing range of 0.14 – 0.75 mm<sup>2</sup> \* (AWG 26 – 18) possible
- Crimping shape trapezoidal

**CA 100/2.5**0.34...4 mm<sup>2</sup>

The CA 100/2.5 is an electro-pneumatic-driven automatic stripper and crimper for time-saving and efficient processing of loose-packed wire end ferrules. It is designed for stationary preparation of medium-sized batches of conductors. The machine is characterised by rapid and simple operation.

- Stripping and crimping in one operation
- Electro-pneumatic drive
- Stripping and crimping range 0.34 ... 4 mm<sup>2</sup> (AWG 22 to 12)
- Processes ferrules of various lengths
- Rapid and easy conversion
- Vibration feeder takes loose ferrules
- Optional processing of wire end ferrules without plastic collar possible
- Crimping shape quadro

**Technical data**

<b>CA 100 C</b>	
Crimping range	0.14 ... 0.34 mm <sup>2</sup> (AWG 26...22)
Crimping lengths	6 ... 8 mm
Connection	100 - 240 V / 50 - 60 Hz / 100 VA
Drive	pneumatic
Compressed air connection	5 - 5.5 bar
Processing time	1.5 s
Size W x D x H	260 x 390 x 390
Weight	23 kg

**Technical data**

<b>CA 100/2.5</b>	
Crimping range	0.34 ... 4 mm <sup>2</sup> (AWG 22...12) (using respective tool)
Crimping lengths	6 ... 12 mm
Connection	100 - 240 V / 50 - 60 Hz / 100 VA
Drive	pneumatic
Compressed air connection	5 - 5.5 bar
Processing time	approx. 2.5 s
Crimping	Quadrocrimp
Size W x D x H	530 x 400 x 460
Weight	40 kg
Options	Trapezoidal crimp tool

**Ordering data**

Type	Qty.	Order No.
CA 100 C	1	on request

**Note on ordering**

In order to precisely determine the required conversion tool, you will need the exact specifications for both the wire end ferrules being processed and the conductors being processed.

Detailed quotation available on request. You can find wire end ferrules in chapter J

**Ordering data**

Type	Qty.	Order No.
CA 100/2.5	1	on request

**Note on ordering**

In order to precisely determine the required conversion tool, you will need the exact specifications for both the wire end ferrules being processed and the conductors being processed.

Detailed quotation available on request. You can find wire end ferrules in chapter J

**CA 100/10**4...10 mm<sup>2</sup>

The CA 100/10 is an electropneumatic powered automatic stripper and crimper for time-saving and rational processing of loose wire end ferrules. It has been developed for the assembly of medium series cables in stationary areas. The automatic machines feature quick and easy handling.

- Stripping and crimping in one operation
- Electropneumatic drive
- Stripping and crimping in a range of 4 to 10 mm<sup>2</sup> (AWG 12 - 8)
- Processing of wire end ferrules of various crimping length
- Quick and easy retooling
- Oscillating conveyor to hold loose wire end ferrules
- Optional processing of wire end ferrules without plastic collar possible

**CA Indent**0.14...2.5 mm<sup>2</sup>

The CA Indent is an electro-pneumatic-driven automatic stripper and crimper for processing loose-packed, turned male and female contacts. The contacts are fed automatically via an oscillating conveyor set-up. Conductors and contacts in the 0.34 ... 2.5 mm<sup>2</sup> range (AWG 22 to 14) can be crimped normally with an indent crimp shape, in compliance with MIL C-22520/1-01. The settings for stripping and crimp depth are motor-driven. The values can be saved in 50 different programs. The keyboard is used for configuration and programming. Important data, functions and errors are shown on the LCD display. With the help of the appropriate tools, the automatic crimper may be converted to various contacts and/or conductors.

- Stripping and crimping in one operation
- Electro-pneumatic drive
- Strips and crimps 0.14 - 2.5 mm<sup>2</sup> (AWG 26-14)
- Processes loose twisted pin and socket contacts
- Weidmüller HDC-C-HD/HE contacts further contacts on request
- Rapid and simple change-over
- Vibration-feeder takes 500 loose machined contacts
- Indent crimp conforms with MIL C-22520/1-01
- Program memory for 50 contact variations
- Stripping and crimping dimensions adjusted by means of electric motor

**Technical data**

<b>CA 100/10</b>	
Crimping range	4 ... 10 mm <sup>2</sup> (AWG 12...8) (with usage of the respective tool set)
Crimping lengths	6...18 mm
Connection	100 - 240 V / 50 - 60 Hz / 100 VA
Drive	Electropneumatic
Compressed-air connection	5 - 5.5 bar
Pulse time	approx. 2.5 sec.
Crimping	Trapezoidal crimp
Dimensions W x D x H (mm)	530 x 400 x 460
Weight	40 kg
Options	Quadrocrimp tool: for a perfectly square four-sided crimp

**Ordering data**

Type	Qty.	Order No.
CA 100/10	1	on request

**Note on ordering**

In order to precisely determine the required conversion tool, you will need the exact specifications for both the wire end ferrules being processed and the cables being processed.

We can send you a detailed offer upon request. You can find wire end ferrules in chapter J

**Technical data**

<b>CA Indent</b>	
Stripping range	0.14 ... 2.5 mm <sup>2</sup> / (AWG 26-14)
Connection	100 - 240 V / 50 - 60 Hz / 185 VA
Drive	pneumatic
Compressed air connection	5 - 5.5 bar
Processing time	approx. 2.5 s
Size W x D x H	450 x 490 x 420
Weight	40 kg

**Ordering data**

Type	Qty.	Order No.
CA Indent	1	on request

**Note on ordering**

The machine is set up using sample contacts to suit the user's requirements. For this we need the name of the manufacturer, the type designation and the cross-sections of the contacts.

Detailed quotation available on request. Additional accessories can be found in our Heavy-Duty Connectors Catalogue.



# Wire end ferrules and insulated connectors

<b>Wire end ferrules and insulated connectors</b>	
Introduction	J.2
Wire end ferrules with plastic collars	J.4
Twin wire end ferrules with plastic collars	J.7
Wire end ferrules for short-circuit-proof and earth-fault-proof cables	J.9
Wire end ferrules with plastic collars, special sizes	J.10
Wire end ferrules without plastic collar	J.12
Assortment of wire end ferrules	J.13
Introduction to the insulated connectors	J.16
Insulated connectors with flared isolation	J.17

# Wire end ferrules and insulated connectors

Weidmüller stocks a comprehensive range of wire end ferrules and insulated cable lugs for immediate supply.

## Wire end ferrules

Wire end ferrules ensure the long-term quality of electrical connections. Another advantage is their usefulness during installation. The wide range of products embraces wire end ferrules with or without plastic collars and twin wire end ferrules in all the colours normally required by users.



## Insulated cable lugs

Insulated cable lugs ensure the long-term quality of electrical connections. Most of the products in the range (apart from the butt connectors) have a conical inlet. This guarantees optimum entry of the conductor as the strands are automatically centred.



## CSA - US certification

The following wire end ferrules are CSA-US certified:



- Unconnected wire end ferrules (bulk-packaged) from 0.14 mm<sup>2</sup> to 50 mm<sup>2</sup> (~ AWG 26 – 1)
- Twin wire end ferrules from 2 x 0.5 mm<sup>2</sup> to 2 x 16 mm<sup>2</sup> (~ AWG 20 – 6)
- Special wire end ferrules for use in small wire chambers and with AWG wires
- Tape-packaged wire end ferrules on reels, or on belt, from 0.5 mm<sup>2</sup> to 2.5 mm<sup>2</sup> (~ AWG 20 – 14)
- Un-insulated wire end ferrules from 0.14 mm<sup>2</sup> to 50 mm<sup>2</sup>

## UL certification

The following ferrules have a UL certification in conjunction with our hand tools and automatic machines:



- Unconnected wire end ferrules (bulk packaged) from 0.14 mm<sup>2</sup> to 50 mm<sup>2</sup> (~ AWG 26 – 1)

## Tools

### Tools for insulated cable lugs

Tool	Order No.	0.5 - 1.5	Type of contact 1.5 - 2.5	4.0 - 6.0
CTI 6	9006120000	●	●	●
CTI 6 G	9202850000	●	●	●
HTI 15	9014400000	●	●	
Station		red	blue	yellow

### Crimping tools for ferrules

	PZ 2.5 S	stripax® plus 2.5	PZ 3	PZ 4	PZ 6 Roto ADJ	PZ 6 Roto L	PZ 6 Roto	PZ 6/5	PZ 10 HEX	PZ 10 SQR	PZ 16	PZ 50
	Order No.											
<b>Ferrule mm<sup>2</sup></b>												
H 0.14	●				●	●	●					
H 0.25	●				●	●	●					
H 0.34	●				●	●	●					
H 0.5	●	● <sup>1</sup>	●	●	●	●	●					
H 0.75	●	● <sup>1</sup>	●	●	●	●	●					
H 1.0	●	● <sup>1</sup>	●	●	●	●	●					
H 1.5	●	● <sup>1</sup>	●	●	●	●	●					
H 2.5	●	● <sup>1</sup>	●	●	●	●	●					
H 4.0			●	●	●	●	●					
H 6.0		●		●	●	●	●					
H 10.0									●	●	●	
H 16.0											●	
H 25.0												●
H 35.0												●
H 50.0												●

●<sup>1</sup> = ferrules in strip form only

### Twin wire end ferrules are to be crimped according to the following table:

Tool	Order No.	H 0.34	H 0.5	H 0.75	H 1.0	H 1.5	Ferrules H 2.5	H 4.0	H 6.0	H 10.0	H 16.0
PZ 2.5 S	9005990000	●	●	●	●	●					
PZ 3	0567300000	●	●	●	●	●	●				
PZ 4	9012500000	●	●	●	●	●	●				
PZ 6 Roto ADJ	2831380000	●	●	●	●	●	●	●			
PZ 6 Roto	9014350000	●	●	●	●	●	●	●	●		
PZ 6 Roto L	1444050000	●	●	●	●	●	●	●	●		
PZ 6/5	9011460000			●	●	●	●	●	●		
Station		1,5 mm <sup>2</sup>	1,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	4 mm <sup>2</sup>	6 mm <sup>2</sup>				
PZ 10 HEX	1445070000	●	●	●	●	●	●	●	●		
PZ 10 SQR	1445080000	●	●	●	●	●	●	●	●		
PZ ZH 16	9013600000							●	●	●	



## Packed loose




- Polypropylene conical entry funnel
- Heat-resistant up to 105°C

For conductors from 0.25-150 mm<sup>2</sup> (AWG 24-300MCM)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

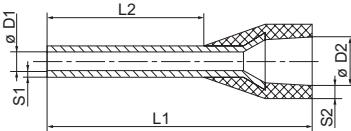

Type	Ø mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Qty.	Weidmüller colour code Order No.	VG*	DIN colour code Order No.	Other colour code Order No.
H0,25/10	0.25	AWG 24	10.00	6	0.8	1.8	0.15	0.25	8	500	● 9025740000			● 9021010000
H0,25/12	0.25	AWG 24	12.00	8	0.8	1.8	0.15	0.25	10	500	● 9025760000			● 9021020000
H0,34/10	0.34	AWG 22	10.00	6	0.8	2	0.15	0.25	8	500	● 9025750000			
H0,34/12	0.34	AWG 22	12.00	8	0.8	2	0.15	0.25	10	500	● 9025770000			
H0,5/12	0.5	AWG 20	12.00	6	1	2.6	0.15	0.25	8	500	● 0409500000	T 20A 001 A ○	9019000000	○ 9019000000
H0,5/14	0.5	AWG 20	14.00	8	1	2.6	0.15	0.25	10	500	● 0690700000	T 20A 002 A ○	9019010000	○ 9019010000
H0,5/14 SP	0.5	AWG 20	14.00	8	1	2.6	0.15	0.25	10	100	● 1476230000	T 20A 002 A ○	1476300000	○ 1476300000
H0,5/16	0.5	AWG 20	16.00	10	1	2.6	0.15	0.25	12	500	● 9025870000	T 20A 003 A ○	9019020000	○ 9019020000
H0,5/18	0.5	AWG 20	18.00	12	1	2.6	0.15	0.25	14	500	● 1076980000	T 20A 003 A ○	1076990000	○ 1076990000
H0,75/12	0.75	AWG 18	12.00	6	1.2	2.8	0.15	0.25	8	500	○ 0409600000	T 20A 004 A ●	9019030000	● 9021030000
H0,75/14	0.75	AWG 18	14.00	8	1.2	2.8	0.15	0.25	10	500	○ 0462900000	T 20A 004 A ●	9019040000	● 9021040000
H0,75/14 SP	0.75	AWG 18	14.00	8	1.2	2.8	0.15	0.25	10	100	○ 1476240000	● 1476310000		
H0,75/16	0.75	AWG 18	16.00	10	1.2	2.8	0.15	0.25	12	500	○ 9025860000	T 20A 006 A ●	9019050000	● 9021050000
H0,75/18	0.75	AWG 18	18.00	12	1.2	2.8	0.15	0.25	14	500	○ 9025910000	T 20A 007 A ●	9019060000	● 9021060000
H1,0/12	1	AWG 17	12.00	6	1.4	3	0.15	0.25	8	500	● 0409700000	T 20A 008 A ●	9019070000	● 9019070000
H1,0/14	1	AWG 17	14.00	8	1.4	3	0.15	0.25	10	500	● 0463000000	T 20A 009 A ●	9019080000	● 9019080000
H1,0/14 SP	1	AWG 17	14.00	8	1.4	3	0.15	0.25	10	100	● 1476250000	T 20A 009 A ●	1476320000	● 1476320000
H1,0/16	1	AWG 17	16.00	10	1.4	3	0.15	0.25	12	500	● 9025950000	T 20A 010 A ●	9019100000	● 9019100000
H1,0/18	1	AWG 17	18.00	12	1.4	3	0.15	0.25	15	500	● 9025930000	T 20A 011 A ●	9019110000	● 9019110000
H1,5/14 SP	1.5	AWG 16	14.00	8	1.7	3.5	0.15	0.25	10	100	● 1476270000	T 20A 012 A ●	1476330000	● 1476330000
H1,5/16	1.5	AWG 16	16.00	10	1.7	3.5	0.15	0.25	12	500	● 0635100000	T 20A 013 A ●	9019130000	● 9019130000
H1,5/24	1.5	AWG 16	24.00	18	1.7	3.5	0.15	0.25	20	500	● 0565600000	● 9019150000	● 9019150000	
H1,5/14	1.5	AWG 16	14.00	8	1.7	3.5	0.15	0.25	10	500	● 0463100000	T 20A 012 A ●	9019120000	● 9019120000
H1,5/18	1.5	AWG 16	18.00	12	1.7	3.5	0.15	0.25	15	500		T 20A 014 A ●	9019140000	● 9019140000
H2,5/15	2.5	AWG 14	15.00	8	2.2	4.2	0.15	0.25	10	500	● 9019160000	T 20A 017 A ●	9019160000	● 9021070000
H2,5/15 SP	2.5	AWG 14	15.00	8	2.2	4.2	0.15	0.25	10	100	● 1476280000	T 20A 017 A ●	1476280000	
H2,5/19	2.5	AWG 14	19.00	12	2.2	4.2	0.15	0.25	14	500	● 9019170000	T 20A 017 A ●	9019170000	● 9021080000
H2,5/25	2.5	AWG 14	25.00	18	2.2	4.2	0.15	0.25	20	500	● 9019180000	T 20A 018 A ●	9019180000	● 9021090000
H4,0/18	4	AWG 12	18.00	10	2.8	4.8	0.2	0.3	12	500	● 9019190000	T 20A 019 A ●	9019190000	● 9021100000
H4,0/18 SP	4	AWG 12	18.00	10	2.8	4.8	0.2	0.3	12	100	● 1476290000	● 1476290000		
H4,0/20	4	AWG 12	20.00	12	2.8	4.8	0.2	0.3	14	500	● 9019200000	T 20A 020 A ●	9019200000	● 9021110000
H4,0/26	4	AWG 12	26.00	18	2.8	4.8	0.2	0.3	20	100	● 9019210000	T 20A 021 A ●	9019210000	● 9021120000
H6,0/26	6	AWG 10	26.00	18	3.5	6.3	0.2	0.3	20	100	● 0565700000	T 20A 023 A ●	9019230000	● 9021140000
H6,0/20	6	AWG 10	20.00	12	3.5	6.3	0.2	0.3	14	100	● 0533500000	T 20A 022 A ●	9019220000	● 9021130000
H10,0/22	10	AWG 8	22.00	12	4.5	7.6	0.2	0.4	15	100	● 0534200000	T 20A 024 A ●	9019240000	● 9021150000
H10,0/28	10	AWG 8	28.00	18	4.5	7.6	0.2	0.4	21	100	● 0565800000	T 20A 025 A ●	9019250000	● 9021160000
H16,0/22	16	AWG 6	22.00	12	5.8	8.8	0.2	0.4	15	100	● 0565900000	T 20A 026 A ●	9019260000	● 9021170000
H16,0/28	16	AWG 6	28.00	18	5.8	8.8	0.2	0.4	21	100	● 0566000000	T 20A 027 A ●	9019270000	● 9021180000
H25,0/30	25	AWG 3	30.00	16	7.3	11.2	0.2	0.4	18	50	● 0317000000	T 20A 028 A ●	9019280000	● 9021190000
H25,0/36	25	AWG 3	36.00	22	7.3	11.2	0.2	0.4	24	50	● 0317100000	T 20A 030 A ●	9019300000	● 9021200000
H35,0/30	35	AWG 2	30.00	16	8.3	12.7	0.2	0.4	19	50	● 0317200000	T 20A 031 A ●	9019310000	
H35,0/32	35	AWG 2	32.00	18	8.3	12.7	0.2	0.4	19	50		T 20A 032 A ●	9019320000	
H35,0/39	35	AWG 2	39.00	25	8.3	12.7	0.2	0.4	28	50	● 0317300000	T 20A 033 A ●	9019330000	
H50,0/36	50	AWG 1	36.00	20	10.3	15	0.3	0.5	26	50	● 0444200000	T 20A 034 A ●	9019340000	
H50,0/41	50	AWG 1	41.00	25	10.3	15	0.3	0.5	31	50		T 20A 035 A ●	9019350000	
H70,0/37	70	AWG 2/0	37.00	21	12.7	16	0.35	0.6	26	25	● 9028200000			
H95,0/44	95	AWG 3/0	44.00	25	14.7	18	0.35	0.6	31	25	● 9028210000			
H120,0/5	120	AWG 4/0	50.00	30	16.5	21	0.5	0.7	36	25	● 9028220000			
H150,0/5	150	AWG 300 MCM	54.00	32	18.5	23.5	0.5	0.75	38	25	● 9028230000			

Note




## In multi-pack bag



- Polypropylene conical entry funnel
- Heat-resistant up to 105°C

For conductors from 0.14-4 mm<sup>2</sup> (AWG 26-12)  
Material E-Cu, electro-galvanised  
Dimensional tolerance acc. to DIN 46228 Part 4

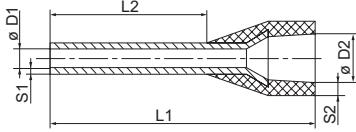

Type	Ø mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Qty.	Weidmüller colour code Order No.	DIN colour code Order No.	Other colour code Order No.
											VG*		
H0,14/10	0.14	AWG 26	10.00	6	0.6	1.5	0.15	0.25	8	500	● 9005180000		● 9028250000
H0,14/12	0.14	AWG 26	12.00	8	0.6	1.5	0.15	0.25	10	500	● 9028240000		
H0,25/10	0.25	AWG 24	10.00	6	0.8	1.8	0.15	0.25	8	500	● 9026050000	● 9021210000	
H0,25/12	0.25	AWG 24	12.00	8	0.8	1.8	0.15	0.25	10	500	● 9025780000	● 9021220000	
H0,34/10	0.34	AWG 22	10.00	6	0.8	2	0.15	0.25	8	500	● 9026030000		
H0,34/12	0.34	AWG 22	12.00	8	0.8	2	0.15	0.25	10	500	● 9025790000		
H0,5/12	0.5	AWG 20	12.00	6	1	2.6	0.15	0.25	8	500	● 9028260000		
H0,5/14	0.5	AWG 20	14.00	8	1	2.6	0.15	0.25	10	500	● 9026060000	T 20A 002 A ○ 9019400000	○ 9019400000
H0,5/16	0.5	AWG 20	16.00	10	1	2.6	0.15	0.25	12	500	● 9028270000		
H0,75/12	0.75	AWG 18	12.00	6	1.2	2.8	0.15	0.25	8	500	● 9028280000		
H0,75/14	0.75	AWG 18	14.00	8	1.2	2.8	0.15	0.25	10	500	● 9026070000	T 20A 005 A ● 9019410000	● 9021230000
H0,75/16	0.75	AWG 18	16.00	10	1.2	2.8	0.15	0.25	12	500	● 9028290000		
H0,75/18	0.75	AWG 18	18.00	12	1.2	2.8	0.15	0.25	14	500	● 9028300000		
H1,0/12	1	AWG 17	12.00	6	1.4	3	0.15	0.25	8	500	● 9028310000		
H1,0/14	1	AWG 17	14.00	8	1.4	3	0.15	0.25	10	500	● 9026080000	T 20A 009 A ● 9019420000	● 9019420000
H1,0/16	1	AWG 17	16.00	10	1.4	3	0.15	0.25	12	500	● 9028320000		
H1,0/18	1	AWG 17	18.00	12	1.4	3	0.15	0.25	15	500	● 9028340000		
H1,5/14	1.5	AWG 16	14.00	8	1.7	3.5	0.15	0.25	10	500	● 9026090000	T 20A 012 A ● 9019430000	● 9019430000
H1,5/16	1.5	AWG 16	16.00	10	1.7	3.5	0.15	0.25	12	500	● 9028350000		
H2,5/15	2.5	AWG 14	15.00	8	2.2	4.4	0.15	0.25	10	500	● 9026100000	T 20A 017 A ● 9026100000	
H2,5/15	2.5	AWG 14	15.00	8	2.2	4.2	0.15	0.25	10	500			● 9021240000
H4,0/18	4	AWG 12	18.00	10	2.8	4.8	0.2	0.3	12	250	● 9026010000	T 20A 019 A ● 9026010000	● 9021250000


## Note

## Strips of linked wire end ferrules



- Polypropylene conical entry funnel
- Heat-resistant up to 105°C

For conductors from 0.14-4 mm<sup>2</sup> (AWG 26-12)  
Material E-Cu, electro-galvanised  
Dimensional tolerance acc. to DIN 46228 Part 4

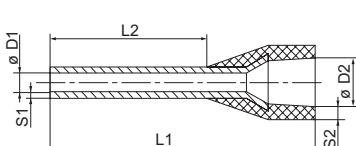

Type	Ø mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Qty.	Weidmüller colour code Order No.	DIN colour code Order No.	Other colour code Order No.
											VG*		
H0,5/14	0.5	AWG 20	14.00	8	1	2.6	0.15	0.25	10	500	● 9004270000	T 20A 002 A ○ 9004280000	○ 9004280000
H0,75/14	0.75	AWG 18	14.00	8	1.2	2.8	0.15	0.25	10	500	● 9004290000	T 20A 005 A ● 9004300000	● 9004310000
H1,0/14	1	AWG 17	14.00	8	1.4	3	0.15	0.25	10	500	● 9004320000	T 20A 009 A ● 9004330000	● 9004330000
H1,5/14	1.5	AWG 16	14.00	8	1.7	3.2	0.15	0.25	10	500	● 9004340000	T 20A 012 A ● 9004350000	● 9004350000
H2,5/14	2.5	AWG 14	14.00	8	2.2	4.2	0.15	0.25	10	500	● 9004360000	T 20A 017 A ● 9004360000	● 9004370000

## Note



## Reel of linked wire end ferrules




- Polypropylene conical entry funnel
- Heat-resistant up to 105°C

For conductors from 0.14-4 mm<sup>2</sup> (AWG 26-12)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

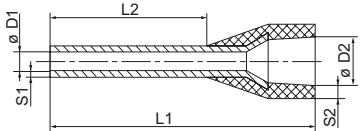

Type	Ø mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Qty.	Weidmüller colour code Order No.	DIN colour code Order No.	Other colour code Order No.
											VG*		
H0,5/14	0.5	AWG 20	14.00	8	1	2.6	0.15	0.25	10	5000	● 9005810000	○ 9005860000	○ 9005860000
H0,5/16	0.5	AWG 20	16.00	10	1	2.6	0.15	0.25	12	5000	● 1476010000	○ 1476070000	○ 1476070000
H0,75/14	0.75	AWG 18	14.00	8	1.2	2.8	0.15	0.25	10	5000	○ 9005820000	● 9005870000	● 9005900000
H0,75/16	0.75	AWG 18	16.00	10	1.2	2.8	0.15	0.25	12	5000	○ 1476030000	● 1476080000	● 1476110000
H1,0/14	1	AWG 17	14.00	8	1.4	3	0.15	0.25	10	5000	● 9005830000	● 9005880000	● 9005880000
H1,0/16	1	AWG 17	16.00	10	1.4	3	0.15	0.25	12	5000	● 1476040000	● 1476090000	● 1476090000
H1,5/14	1.5	AWG 16	14.00	8	1.7	3.5	0.15	0.25	10	5000	● 9005840000	● 9005890000	● 9005890000
H1,5/16	1.5	AWG 16	16.00	10	1.7	3.5	0.15	0.25	12	5000	● 1476050000	● 1476100000	● 1476100000
H2,5/14	2.5	AWG 14	14.00	8	2.2	4.2	0.15	0.25	10	3000	● 9005850000	● 9005850000	● 9005910000
H2,5/16	2.5	AWG 14	16.00	10	2.2	4.2	0.15	0.25	12	3000	● 1476060000	● 1476060000	● 1476120000

Note


**Packed loose**

- Polypropylene conical entry funnel
- Heat-resistant up to 105°C

For conductors of 2 x 0.34-2 x 16 mm<sup>2</sup> (2 x AWG 22-2 x AWG6)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

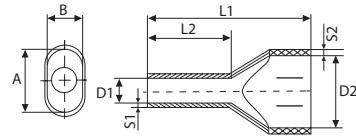

Type	Ø mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Qty.	Weidmüller colour code Order No.	DIN colour code Order No.	Other colour code Order No.
											VG*		
H0,34/15	0.34	AWG 22	15.00	8	1.2		0.15	0.25	11	500	● 9139070000		
H0,5/14	0.5	AWG 20	14.00	8	1.4		0.15	0.3	11	500	● 9037200000	○ 9037380000	○ 9037380000
H0,5/16	0.5	AWG 20	16.00	10	1.4		0.15	0.3	13	500	● 9037210000	○ 9037390000	○ 9037390000
H0,5/18	0.5	AWG 20	18.00	12	1.4		0.15	0.3	15	500	● 9037220000	○ 9037400000	○ 9037400000
H0,75/14	0.75	AWG 18	14.00	8	1.7		0.15	0.3	11	500	○ 9037230000	● 9037410000	● 9037610000
H0,75/16	0.75	AWG 18	16.00	10	1.7		0.15	0.3	13	500	○ 9037240000	● 9037420000	● 9037620000
H0,75/19	0.75	AWG 18	19.00	12	1.7		0.15	0.3	15	500	○ 9202820000	● 9202830000	● 9202840000
H0,75/24	0.75	AWG 18	24.00	18	1.7		0.15	0.3	21	500	○ 9037250000	● 9037430000	● 9037630000
H1,0/15	1	AWG 17	15.00	8	2		0.15	0.3	11	500	● 9037260000	● 9037440000	● 9037440000
H1,0/15S	1	AWG 17	15.00	8	2.3		0.15	0.3	12	500	● 9018690000		
H1,0/19	1	AWG 17	19.00	12	2		0.15	0.3	16	500	● 9037270000	● 9037450000	● 9037450000
H1,0/22	1	AWG 17	22.00	14	2		0.15	0.3	21	500		● 9036330000	● 9036330000
H1,0/25	1	AWG 17	25.00	18	2		0.15	0.3	22	500	● 9037280000	● 9037460000	● 9037460000
H1,5/16	1.5	AWG 16	16.00	8	2.2		0.15	0.3	11	500	● 9037290000	● 9037470000	● 9037470000
H1,5/20	1.5	AWG 16	20.00	12	2.2		0.15	0.3	15	500	● 9037300000	● 9037480000	● 9037480000
H1,5/26	1.5	AWG 16	26.00	18	2.2		0.15	0.3	21	100	● 9037310000	● 9037490000	● 9037490000
H2,5/19	2.5	AWG 14	19.00	10	2.8		0.15	0.4	13	500	● 9037500000	● 9037500000	● 9037640000
H2,5/21	2.5	AWG 14	21.00	12	2.8		0.15	0.4	15	100	● 9037510000	● 9037510000	● 9037650000
H2,5/27	2.5	AWG 14	27.00	18	2.8		0.15	0.4	21	100	● 9037520000	● 9037520000	● 9037660000
H4,0/22	4	AWG 12	22.00	12	3.5		0.2	0.5	15	100	● 9037530000	● 9037530000	● 9037670000
H4,0/28	4	AWG 12	28.00	18	3.5		0.2	0.5	21	100	● 9037540000	● 9037540000	● 9037680000
H6,0/23	6	AWG 10	23.00	12	4.5		0.2	0.5	20	100	● 9037320000	● 9037550000	● 9037690000
H6,0/29	6	AWG 10	29.00	18	4.5		0.2	0.5	24	100	● 9037330000	● 9037560000	● 9037700000
H10,0/24	10	AWG 8	24.00	12	5.8		0.2	0.5	17	100	● 9037340000	● 9037570000	● 9037710000
H10,0/30	10	AWG 8	30.00	18	5.8		0.2	0.5	23	100	● 9037350000	● 9037580000	● 9037720000
H16,0/29	16	AWG 6	29.00	16	8.3		0.3	0.6	20	50	● 9037360000	● 9037590000	● 9037730000
H16,0/38	16	AWG 6	38.00	25	8.3		0.3	0.6	29	50	● 9037370000	● 9037600000	● 9037740000

**Note**

In multi-pack bag




- Polypropylene conical entry funnel
- Heat-resistant up to 105°C

For conductors of 2 x 0.34-2 x 16 mm<sup>2</sup> (2 x AWG 22-2 x AWG6)


Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

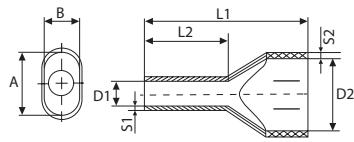

Type	Ø mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Qty.	Weidmüller colour code	DIN colour code	Other colour code
											Order No.	Order No.	Order No.
H0,5/14	0.5	AWG 20	14.00	8	1.4		0.15	0.3	11	500	● 9004440000	○ 9004780000	○ 9004780000
H0,75/14	0.75	AWG 18	14.00	8	1.7		0.15	0.3	11	500	○ 9018510000	● 9018520000	● 9018570000
H0,75/15	0.75	AWG 18	15.00	8	1.7		0.15	0.3	11	500		● 9004900000	● 9004770000
H0,75/16	0.75	AWG 18	16.00	10	1.7		0.15	0.3	13	500	○ 9018530000	● 9004770000	● 9005140000
H1,0/15	1	AWG 17	15.00	8	2.2		0.15	0.3	12	500	● 9018540000	● 9018540000	● 9018540000
H1,0/15S	1	AWG 17	15.00	8	2.2		0.15	0.3	12	500	● 9018650000		
H1,0/19	1	AWG 17	19.00	12	2		0.15	0.3	16	500	● 9004910000	● 9004760000	● 9004760000
H1,5/16	1.5	AWG 16	16.00	8	2.2		0.15	0.3	11	500	● 9004410000	● 9004420000	● 9004420000
H1,5/20	1.5	AWG 16	20.00	12	2.2		0.15	0.3	15	500	● 9004920000	● 9004750000	● 9004750000
H2,5/19	2.5	AWG 14	19.00	10	2.8		0.15	0.4	13	250	● 9004430000	● 9004430000	● 9018580000
H2,5/21	2.5	AWG 14	21.00	12	2.8		0.15	0.4	15	250	● 9004740000	● 9004740000	● 9005150000
H4,0/22	4	AWG 12	22.00	12	3.5		0.2	0.5	15	100	● 9004730000	● 9004730000	● 9018590000
H6,0/23	6	AWG 10	23.00	12	4.5		0.2	0.5	20	100	● 9004930000	● 9004720000	● 9005160000
H10,0/24	10	AWG 8	24.00	12	5.8		0.2	0.5	17	100	● 9004940000		
H10,0/26	10	AWG 8	26.00	12	5.8		0.2	0.5	17	100		● 9004710000	● 9005170000

Note

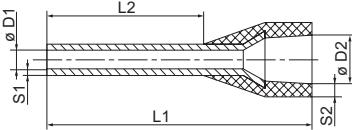

- Polypropylene conical entry funnel
- Heat-resistant up to 105 °C

For conductors from 1.5-16 mm<sup>2</sup> (AWG 26-250MCM)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4



### Weidmüller colour code

Packed loose




Type	$\varnothing$ mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Colour	Qty.	Order No.
H1,5/24 XS SW	1.5	AWG 16	24.00	14.5	1.8	6.8	0.15	0.3	18	● black	100	9202870000
H2,5/24 XS BL	2.5	AWG 14	24.00	14.5	2.3	7.6	0.15	0.3	18	● blue	100	9202880000

### Weidmüller colour code

In multi-pack bag



Type	$\varnothing$ mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Colour	Qty.	Order No.
H1,5/17,5X SW SV	1.5	AWG 16	17.50	8	1.8	7.0	0.15	0.3	13	● black	100	9006590000
H1,5/19,5X SW SV	1.5	AWG 16	19.50	10	1.8	7.0	0.15	0.3	15	● black	100	9006630000
H2,5/17,5X BL SV	2.5	AWG 14	17.50	8	2.3	7.9	0.15	0.3	14	● blue	100	9006670000
H2,5/21,5X BL SV	2.5	AWG 14	21.50	12	2.3	7.9	0.15	0.3	17	● blue	100	9006710000
H4,0/19,5X GR SV	4	AWG 12	19.50	10	2.9	7.9	0.2	0.3	14	● grey	100	9006750000
H6,0/23X GE SV	6	AWG 10	23.00	12	3.6	8.8	0.2	0.3	17	● yellow	100	9006790000
H10,0/24,0X R SV	10	AWG 8	24.00	12	4.6	9.8	0.2	0.3	17	● red	100	9006830000
H16,0/25,5X BL SV	16	AWG 6	25.50	12	6	12.1	0.2	0.3	26	● blue	100	9006870000

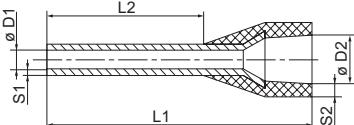

- Polypropylene conical entry funnel
- Heat-resistant up to 105°C

For conductors from 0.34-35 mm<sup>2</sup> Material E-Cu, electro-galvanised  
Dimensional tolerance acc. to DIN 46228 Part 4



### Special size

#### Packed loose



Type	$\varnothing$ mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Colour	Qty.	Order No.
H0,34/11 S TK	0.34	AWG 22	11.00	6	0.85	2.6	0.15	0.25	6	turquoise	500	9204090000
H0,5/14S OR	0.5	AWG 20	14.00	8	1	2.9	0.15	0.25	10	orange	500	9004560000
H0,5/14S W	0.5	AWG 20	14.00	8	1	2.9	0.15	0.25	10	white	500	9004590000
H0,5/16 DS W	0.5	AWG 20	16.00	10	1	2.9	0.15	0.25	12	white	500	9202910000
H0,5/16S OR	0.5	AWG 20	16.00	10	1	2.9	0.15	0.25	12	orange	500	9202900000
H0,75/14DS GR	0.75	AWG 18	14.00	8	1.2	3.4	0.15	0.25	10	grey	500	9028580000
H0,75/14S W	0.75	AWG 18	14.00	8	1.2	3.4	0.15	0.25	10	white	500	9025960000
H0,75/14TS HBL	0.75	AWG 18	14.00	8	1.2	3.4	0.15	0.25	10	light blue	500	9018550000
H0,75/15S W	0.75	AWG 18	15.00	9	1.2	2.8	0.15	0.25	10	white	500	9204240000
H0,75/16DS GR	0.75	AWG 18	16.00	10	1.2	3.4	0.15	0.3	12	grey	500	2091010000
H1,0/14S GE	1	AWG 17	14.00	8	1.4	3.5	0.15	0.25	10	yellow	500	9025970000
H1,0/14S R	1	AWG 17	14.00	8	1.4	3.5	0.15	0.25	10	red	500	9018560000
H1,0/16 DS R	1	AWG 17	16.00	10	1.4	3.5	0.15	0.3	12	red	500	2092480000
H1,5/12S R	1.5	AWG 16	12.00	6	1.7	4	0.15	0.25	8	red	500	9025690000
H1,5/14S R	1.5	AWG 16	14.00	8	1.7	4	0.15	0.25	10	red	500	9025980000
H1,5/14DS SW	1.5	AWG 16	14.00	8	1.7	4	0.15	0.25	10	black	500	9025240000
H1,5/16 DS SW	1.5	AWG 16	16.00	10	1.7	4	0.15	0.25	12	black	500	2092490000
H2,5/12DS BL	2.5	AWG 14	12.00	6	2.2	4.2	0.15	0.25	8	blue	500	9028490000
H2,5/12TS GR	2.5	AWG 14	12.00	6	2.2	4.2	0.15	0.25	8	grey	500	9036200000
H2,5/14DS BL	2.5	AWG 14	14.00	8	2.2	4	0.15	0.25	10	blue	500	1333100000
H2,5/14TS GR	2.5	AWG 14	14.00	8	2.2	4	0.15	0.25	10	grey	500	9426770000
H2,5/16DS BL	2.5	AWG 14	16.00	10	2.2	4.2	0.15	0.25	13	blue	500	9036220000
H4,0/20DS GR	4	AWG 12	20.00	12	2.9	4.7	0.2	0.5	15	grey	500	9203630000
H10,0/22S EB	10	AWG 8	22.00	12	4.6	7.1	0.2	0.6	15	ivory	100	9203620000
H10,0/28S SW	10	AWG 8	27.50	18	4.6	7.4	0.2	0.3	21	black	100	1462590000
H35,0/30 DS RT	35	AWG 2	30.00	16	8.3	12.7	0.2	0.4	19	red	50	1418020000
H35,0/30 S BE	35	AWG 2	30.00	16	8.3	12.7	0.2	0.4	19	beige	50	1418030000
H35,0/32 DS RT	35	AWG 2	32.00	18	8.3	12.7	0.2	0.4	21	red	50	1418330000
H35,0/32 S BE	35	AWG 2	32.00	18	8.3	12.7	0.2	0.4	21	beige	50	1418340000

### Special size

#### In multi-pack bag




Type	$\varnothing$ mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Colour	Qty.	Order No.
H0,75/14S W SV	0.75	AWG 18	14.00	8	1.2	3.4	0.15	0.25	10	white	500	9025700000
H1,0/14S GE SV	1	AWG 17	14.00	8	1.4	3.5	0.15	0.25	10	yellow	500	9025710000
H1,5/14DS SW SV	1.5	AWG 16	14.00	8	1.7	4	0.15	0.25	10	black	500	9028360000
H1,5/14S R SV	1.5	AWG 16	14.00	8	1.7	4	0.15	0.25	10	red	500	9025720000
H2,5/14S BL SV	2.5	AWG 14	14.00	8	2.2	4	0.15	0.25	10	blue	500	9046230000

### Special size

#### Reel of linked wire end ferrules



Type	$\varnothing$ mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Colour	Qty.	Order No.
H0,5/14DS W BD GSP	0.5	AWG 20	14.00	8	1	2.9	0.15	0.25	10	white	4000	2528590000
H0,5/16DS W BD GSP	0.5	AWG 20	16.00	10	1	2.9	0.15	0.25	12	white	4000	2604630000
H0,5/14S OR BD GSP	0.5	AWG 20	14.00	8	1	2.9	0.15	0.25	10	orange	4000	2528550000
H0,5/16S OR BD GSP	0.5	AWG 20	16.00	10	1	2.9	0.15	0.25	12	orange	4000	2604620000
H0,75/14DS GR BD GSP	0.75	AWG 18	14.00	8	1.2	3.4	0.15	0.25	10	grey	4000	2528600000
H0,75/16DS GR BD GSP	0.75	AWG 18	16.00	10	1.2	3.4	0.15	0.25	12	grey	4000	2604650000
H0,75/14S W BD GSP	0.75	AWG 18	14.00	8	1.2	3.4	0.15	0.25	10	white	4000	2528560000
H0,75/16S W BD GSP	0.75	AWG 18	16.00	10	1.2	3.4	0.15	0.25	12	white	4000	2604640000
H0,75/14TS HB BD GSP	0.75	AWG 18	14.00	8	1.2	3.4	0.15	0.25	10	light blue	4000	2528630000
H0,75/16TS HB BD GSP	0.75	AWG 18	16.00	10	1.2	3.4	0.15	0.25	12	light blue	4000	2604660000
H1,0/14DS R BD GSP	1	AWG 18	14.00	8	1.4	3.5	0.15	0.25	10	red	4000	2528610000
H1,0/16DS R BD GSP	1	AWG 18	16.00	10	1.4	3.5	0.15	0.25	12	red	4000	2604690000
H1,0/14S GE BD GSP	1	AWG 18	14.00	8	1.4	3.5	0.15	0.25	10	yellow	4000	2528570000
H1,0/16S GE BD GSP	1	AWG 18	16.00	10	1.4	3.5	0.15	0.25	12	yellow	4000	2604680000
H1,5/14DS SW BD GSP	1.5	AWG 16	14.00	8	1.7	3.9	0.15	0.25	10	black	4000	2528620000
H1,5/16DS SW BD GSP	1.5	AWG 16	16.00	10	1.7	3.9	0.15	0.25	12	black	4000	2604710000
H1,5/14S R BD GSP	1.5	AWG 16	14.00	8	1.7	3.9	0.15	0.25	10	red	4000	2528580000
H1,5/16S R BD GSP	1.5	AWG 16	16.00	10	1.7	3.9	0.15	0.25	12	red	4000	2604700000

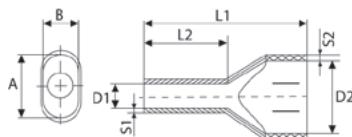

- Polypropylene conical entry funnel
- Heat-resistant up to 105°C

For conductors of 2 x 10 mm<sup>2</sup> (2 x AWG 8)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4




### Twin wire end ferrules Special size

Packed loose



Type	$\varnothing$ mm <sup>2</sup>	AWG	L1	L2	D1	S1	S2	A	B	Stripping length	Colour	Qty.	Order No.
H10,0/24DS ZH R	10	AWG 8	24.00	12	6.5	0.2	0.5	13.4	7.6	17	red	100	9018880000
H10,0/30DS ZH R	10	AWG 8	30.00	18	6.5	0.2	0.5	13.4	7.6	23	red	100	9018890000
H10,0/24S ZH EB	10	AWG 8	24.00	12	6.5	0.2	0.5	13.4	7.6	17	ivory	100	9018860000
H10,0/30S ZH EB	10	AWG 8	30.00	18	6.5	0.2	0.5	13.4	7.6	23	ivory	100	9018870000

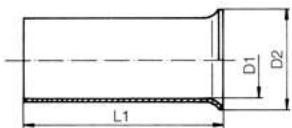

For conductors 0.25-150 mm² (AWG 24-300MCM)

Material: tin-plated copper

Dimensional tolerances to DIN 46228 part 1

**Without plastic collar****Packed loose**

Type	$\varnothing$ mm <sup>2</sup>	AWG	L1	L2	D1	D2	S1	S2	Stripping length	Qty.	Order No.
H0,25/5	0.25	AWG 24	5.00	5	0.8	1.6	5			1000	9018910000
H0,25/7	0.25	AWG 24	7.00	7	0.75	1.7	7			1000	2919620000
H0,34/5	0.34	AWG 22	5.00	5	0.85	1.8	5			1000	1475640000
H0,34/7	0.34	AWG 22	7.00	7	0.85	1.8	7			1000	2919630000
H0,5/6	0.5	AWG 20	6.00	6	1	2.1	6			1000	0282600000
H0,5/7	0.5	AWG 20	7.00	7	1	2.1	7			1000	2919640000
H0,5/8	0.5	AWG 20	8.00	8	1	2.1	8			1000	2984690000
H0,5/10	0.5	AWG 20	10.00	10	1	2.1	10			1000	9004050000
H0,75/6	0.75	AWG 18	6.00	6	1.2	2.3	6			1000	0282700000
H0,75/10	0.75	AWG 18	10.00	10	1.2	2.3	10			1000	0542500000
H1,0/6	1	AWG 17	6.00	6	1.4	2.5	6			1000	0372600000
H1,0/8	1	AWG 18	8.00	8	1.4	2.5	8			1000	2874610000
H1,0/10	1	AWG 17	10.00	10	1.4	2.5	10			1000	0282800000
H1,0/12	1	AWG 18	12.00	12	1.4	2.5	12			1000	2874620000
H1,5/7	1.5	AWG 16	7.00	7	1.7	2.8	7			1000	0372700000
H1,5/10	1.5	AWG 16	10.00	10	1.7	2.8	10			1000	0186500000
H1,5/12	1.5	AWG 16	12.00	12	1.7	2.8	12			1000	9004060000
H1,5/18	1.5	AWG 16	18.00	18	1.7	2.8	18			1000	9004070000
H2,5/7	2.5	AWG 14	7.00	7	2.2	3.4	7			1000	0373000000
H2,5/10	2.5	AWG 14	10.00	10	2.2	3.4	10			1000	9004080000
H2,5/12	2.5	AWG 14	12.00	12	2.2	3.4	12			1000	0186100000
H2,5/18	2.5	AWG 14	18.00	18	2.2	3.4	18			1000	9004090000
H4,0/9	4	AWG 12	9.00	9	2.8	4	9			500	0373100000
H4,0/12	4	AWG 12	12.00	12	2.8	4	12			1000	0244100000
H4,0/15	4	AWG 12	15.00	15	2.8	4	15			500	9004100000
H4,0/18	4	AWG 12	18.00	18	2.8	4	18			500	9004110000
H6,0/10	6	AWG 10	10.00	10	3.5	4.7	10			500	9004120000
H6,0/12	6	AWG 10	12.00	12	3.5	4.7	12			500	0191900000
H6,0/15	6	AWG 10	15.00	15	3.5	4.7	15			500	0124700000
H6,0/18	6	AWG 10	18.00	18	3.5	4.7	18			500	9004130000
H10,0/12	10	AWG 8	12.00	12	4.5	5.8	12			500	0282900000
H10,0/15	10	AWG 8	15.00	15	4.5	5.8	15			500	0124800000
H10,0/18	10	AWG 8	18.00	18	4.5	5.8	18			500	0379300000
H16,0/12	16	AWG 6	12.00	12	5.8	7.5	12			500	0492500000
H16,0/15	16	AWG 6	15.00	15	5.8	7.5	15			500	0124300000
H16,0/18	16	AWG 6	18.00	18	5.8	7.5	18			100	0375200000
H16,0/25	16	AWG 6	25.00	25	5.8	7.5	25			100	9004150000
H16,0/32	16	AWG 6	32.00	32	5.8	7.5	32			100	9004160000
H25,0/15	25	AWG 3	15.00	15	7.3	9.5	15			250	0124400000
H25,0/18	25	AWG 3	18.00	18	7.3	9.5	18			100	0375300000
H25,0/25	25	AWG 3	25.00	25	7.3	9.5	25			250	9004170000
H25,0/32	25	AWG 3	32.00	32	7.3	9.5	32			100	9004180000
H35,0/18	35	AWG 2	18.00	18	8.3	11	18			100	0368900000
H35,0/25	35	AWG 2	25.00	25	8.3	11	25			100	9004190000
H35,0/30S	35	AWG 2	30.00	30	8.3	11	30			100	9451000000
H35,0/32	35	AWG 2	32.00	32	8.3	11	32			100	9004200000
H50,0/18	50	AWG 1	18.00	18	10.3	13	18			100	9004210000
H50,0/22S	50	AWG 1	22.00	22	10.3	13	22			100	9025880000
H50,0/32	50	AWG 1	32.00	32	10.3	13	32			100	9004220000
H70,0/25	70	AWG 2/0	25.00	25	12.5	15	25			50	9004230000
H70,0/32	70	AWG 2/0	32.00	32	12.5	15	32			50	9004240000
H95,0/25	95	AWG 3/0	25.00	25	14.5	17	25			50	9004250000
H95,0/32	95	AWG 3/0	32.00	32	14.5	17	32			50	9004260000
H120,0/32	120	AWG 4/0	32.00	32	16.5	19	32			25	9036240000
H150,0/32	150	AWG 300 MCM	32.00	32	18.5	21	32			25	9036250000
H185,0/32	185	AWG 350 MCM	32.00	32	20	23.5	32			25	9036260000

The products H70,0/25, H70,0/32, H95,0/25, H95,0/32, H120,0/32 and H150,0/32 are not UL tested

**0.14...0.75 mm<sup>2</sup>**

Box filled with wire-end ferrules with plastic collar:

- in Weidmüller colour code

**0.5...2.5 mm<sup>2</sup>**

Box filled with wire-end ferrules with plastic collar:

- in Weidmüller colour code

**0.5...2.5 mm<sup>2</sup>**

Box filled with wire-end ferrules with plastic collar:

- DIN colour code

Illustration similar

**Assembly**

Colour	Piece
grey	H0,14/10 GR SV
Light Blue	H0,25/10 HBL
Turquoise	H0,34/10 TK
orange	H0,5/14 OR
white	H0,75/14 W

**Assembly**

Colour	Piece
orange	H0,5/14 OR
white	H0,75/14 W
yellow	H1,0/14 GE
red	H1,5/14 R
blue	H2,5/15D BL

**Assembly**

Colour	Piece
white	H0,5/14D W
grey	H0,75/14D GR
red	H1,0/14D R
black	H1,5/14D SW
blue	H2,5/15D BL

**Technical data**

Diameter / Height	92 mm / 25 mm
Weight	93 g

**Technical data**

Diameter / Height	92 mm / 40 mm
Weight	93 g

**Technical data**

Diameter / Height	92 mm / 40 mm
Weight	93 g

**Ordering data**

Colour code	Type	Order No.
Weidmüller	H-BOX 0,14-0,75QMM	<b>9025410000</b>

**Ordering data**

Colour code	Type	Order No.
Weidmüller	H-BOX 0,5-2,5QMM	<b>9025900000</b>

**Ordering data**

Colour code	Type	Order No.
DIN	H-BOX 0,5-2,5QMM DIN	<b>9025430000</b>

**Assortment of wire end ferrules**

www.nortecnica.pt

**0.5...2.5 mm<sup>2</sup>**

Illustration similar

Box filled with wire-end ferrules with plastic collar:

- Other colour code

**ZH 0.5...2.5 mm<sup>2</sup>**

Box filled with twin wire-end ferrules with plastic collars:

- in Weidmüller colour code

**4.0...16 mm<sup>2</sup>**

Box filled with wire-end ferrules with plastic collars:

- in Weidmüller colour code

**Assembly**

Colour	Piece
white	H0,5/14D W
Light Blue	H0,75/14T HBL
red	H1,0/14D R
black	H1,5/14D SW
grey	H2,5/15T GR
	50

**Assembly**

Colour	Piece
orange	H0,5/14 ZH OR
white	H0,75/14 ZH W
yellow	H1,0/15 ZH GE
red	H1,5/16 ZH R
blue	H2,5/19D ZH BL
	50

**Assembly**

Colour	Piece
grey	H4,0/18D GR
black	H6,0/20 SW
Ivory	H10,0/22 EB
green	H16,0/22 GN
	10

**Technical data**

Diameter / Height	92 mm / 40 mm
Weight	93 g

**Technical data**

Diameter / Height	92 mm / 40 mm
Weight	93 g

**Technical data**

Diameter / Height	92 mm / 40 mm
Weight	93 g

**Ordering data**

Colour code	Type	Order No.
Miscellaneous	H-BOX 0.5-2.5QMM T	<b>9023090000</b>

**Ordering data**

Colour code	Type	Order No.
Weidmüller	ZH-BOX 0,5-2,5QMM	<b>9025390000</b>

**Ordering data**

Colour code	Type	Order No.
Weidmüller	H-BOX 4,0-16,0QMM	<b>9025920000</b>

**4.0...16 mm<sup>2</sup>**

Illustration similar

Box filled with wire-end ferrules with plastic collars:

- DIN colour code

**Empty box**

Empty box for wire-end ferrules with

- 4 dividers
- 5 dividers
- 5 coloured inserts

**Assembly**

Colour	Piece
grey	H4,0/18D GR 50
yellow	H6,0/20D GE 20
red	H10,0/22D R 20
blue	H16,0/22D BL 10

**Technical data**

Diameter / Height	92 mm / 40 mm
Weight	93 g

**Ordering data**

Colour code	Type	Order No.
DIN	H-BOX 4,0-16,0QMM DIN	<b>9025400000</b>

**Technical data**

Diameter / Height	92 mm / 40 mm
Weight	43 g

**Ordering data**

Colour code	Type	Order No.
Empty box	H-LEERBOX 4 TRENNSTEGE	<b>9025420000</b>
Empty box	H-LEERBOX 5 EINSAETZE	<b>9025940000</b>
Empty box	H-LEERBOX 5 TRENNSTEGE	<b>9025680000</b>


# Insulated connectors

## Colour of insulation

cross section mm <sup>2</sup>	colour
0.1 - 0.5	yellow
0.5 - 1	red
1.5 - 2.5	blue
4 - 6	yellow
10	red
16	blue
25	yellow
35	red
50	blue
70	yellow
95	red
120	blue
150	yellow

J

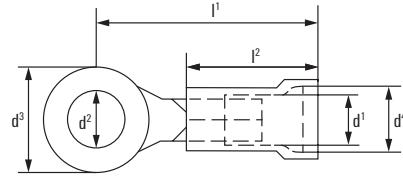

**Ring terminal****Technical data**

Material:	Cu
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	600 V

**Ordering data**

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	Dimensions in mm	Qty.	Order No.	Tool recommendation	
LIR 1.5M3 V	0.5 - 1.5	●	M 3	1.7	3.2 5.5 4.0	16.05 11.3 0.75	100 9200070000	H11/16
LIR 1.5M3.5 V	0.5 - 1.5	●	M 3.5	1.7	3.7 5.5 4.0	16.05 11.3 0.75	100 9200080000	H11/16
LIR 1.5M4 V	0.5 - 1.5	●	M 4	1.7	4.3 8.0 4.0	18.3 11.3 0.75	100 9200090000	H11/16
LIR 1.5M5 V	0.5 - 1.5	●	M 5	1.7	5.3 8.0 4.0	18.3 11.3 0.75	100 9200100000	H11/16
LIR 1.5M6 V	0.5 - 1.5	●	M 6	1.7	6.4 11.6 4.0	21.0 11.3 0.75	100 9200110000	H11/16
LIR 1.5M8 V	0.5 - 1.5	●	M 8	1.7	8.4 11.6 4.0	21.0 11.3 0.75	100 9200120000	H11/16
IR 1.5M10 V	0.15 - 1.5	●	M 10	1.7	10.5 14.0 4.0	23.3 11.3 0.75	100 2792000000	C11/16 + C11/66
LIR 2.5M3 V	1.5 - 2.5	●	M 3	2.3	3.2 6.4 4.5	15.6 11.3 0.8	100 9200150000	H11/16
LIR 2.5M3.5 V	1.5 - 2.5	●	M 3.5	2.3	3.7 6.4 4.5	15.6 11.3 0.8	100 9200160000	H11/16
LIR 2.5M4 V	1.5 - 2.5	●	M 4	2.3	4.3 8.5 4.5	19.05 11.3 0.8	100 9200170000	H11/16
LIR 2.5M5 V	1.5 - 2.5	●	M 5	2.3	5.3 8.5 4.5	19.05 11.3 0.8	100 9200180000	H11/16
LIR 2.5M6 V	1.5 - 2.5	●	M 6	2.3	6.4 12.0 4.5	22.3 11.3 0.8	100 9200190000	H11/16
LIR 2.5M8 V	1.5 - 2.5	●	M 8	2.3	8.4 12.0 4.5	22.3 11.3 0.8	100 9200200000	H11/16
LIR 2.5M10 V	1.5 - 2.5	●	M 10	2.3	10.5 14.0 4.5	23.3 11.3 0.8	100 9200210000	H11/16
LIR 6.0M4 V	4 - 6	●	M 4	3.4	4.3 9.5 6.4	22.75 14.15 1	100 9200230000	H11/16
LIR 6M5 V	4 - 6	●	M 5	3.4	5.3 9.5 6.4	22.75 14.15 1	100 9200240000	H11/16
LIR 6M6 V	4 - 6	●	M 6	3.4	6.5 12.0 6.4	25 14.15 1	100 9200250000	H11/16
LIR 6M8 V	4 - 6	●	M 8	3.4	8.4 15.0 6.4	28 14.15 1	100 9200260000	H11/16
LIR 6.0M10 V	4 - 6	●	M 10	3.4	10.5 15.0 6.4	28 14.15 1	100 9200270000	H11/16


S1\* = Connection density


**Ring terminal  
DIN 46237****Technical data**

Material:	Cu-ETP
Insulation:	PC
or	
* Insulation:	PA
Surface:	tin plated
S = small palm	
Temperature resistance:	-55 °C to +100 °C (0.1 - 0.5 mm <sup>2</sup> ) or -40 °C to +100 °C (0.5 - 6 mm <sup>2</sup> )
Volt max.:	600 V

**Ordering data**

Type	Cross-section mm <sup>2</sup>	Flat hole M	Colour	Dimensions	Dimensions in mm	Qty.	Order No.	Tool recommendation
KQI-M2/-0.5	0.1 - 0.5	2	●	1	2.2 5 2.3	14	100 1492090000*	H11/16
KQI-M3/-0.5	0.1 - 0.5	3	●	1	3.2 5 2.3	14	100 1492100000*	H11/16
KQI-M4/-0.5	0.1 - 0.5	4	●	1	4.3 6.5 2.3	16	100 1492110000*	H11/16
KQI-M5/-0.5	0.1 - 0.5	5	●	1	5.3 8 2.3	16	100 1492120000*	H11/16
KQI-M2/-1	0.5 - 1	2	●	1.6	2.2 6 4	17	100 1492140000	H11/16
KQI-M2.5/-1	0.5 - 1	2.5	●	1.6	2.7 6 4	17	100 1492150000	H11/16
KQI-M3/-1	0.5 - 1	3	●	1.6	3.2 6 4	17	100 1492170000	H11/16
KQI-M3.5/-1	0.5 - 1	3.5	●	1.6	3.7 6 4	17	100 1492180000	H11/16
KQI-M4/S/-1	0.5 - 1	4/S	●	1.6	4.3 7 4	17.5	100 1492190000	H11/16
KQI-M4/-1	0.5 - 1	4	●	1.6	4.3 8 4	18	100 1492200000	H11/16
KQI-M5/S/-1	0.5 - 1	5/S	●	1.6	5.3 8 4	18.5	100 1492210000	H11/16
KQI-M5/-1	0.5 - 1	5	●	1.6	5.3 10 4	19	100 1492220000	H11/16
KQI-M6/-1	0.5 - 1	6	●	1.6	6.5 10 4	19	100 1492230000	H11/16
KQI-M8/-1	0.5 - 1	8	●	1.6	8.4 14 4	23	100 1492240000	H11/16
KQI-M10/-1	0.5 - 1	10	●	1.6	10.5 18 4	25	100 1492130000	H11/16
KQI-M2.5/-2.5	1.5 - 2.5	3	●	2.3	3.2 6 4.4	17	100 1492250000	H11/16
KQI-M3.5/2.5	1.5 - 2.5	3.5	●	2.3	3.7 6 4.4	17	100 1492270000	H11/16
KQI-M4/S/2.5	1.5 - 2.5	4/S	●	2.3	4.3 6.8 4.4	17.6	100 1492280000	H11/16
KQI-M4/2.5	1.5 - 2.5	4	●	2.3	4.3 8 4.4	18	100 1492290000	H11/16
KQI-M5/S/2.5	1.5 - 2.5	5/S	●	2.3	5.3 8 4.4	19.5	100 1492300000	H11/16
KQI-M5/2.5	1.5 - 2.5	5	●	2.3	5.3 10 4.4	20	100 1492310000	H11/16
KQI-M6/2.5	1.5 - 2.5	6	●	2.3	6.5 11 4.4	22	100 1492320000	H11/16
KQI-M8/2.5	1.5 - 2.5	8	●	2.3	8.4 14 4.4	23	100 1492330000	H11/16
KQI-M10/2.5	1.5 - 2.5	10	●	2.3	10.5 18 4.4	25.6	100 1492340000	H11/16
KQI-M12/2.5	1.5 - 2.5	12	●	2.3	13 18 4.4	26	100 1492350000	H11/16
KQI-M4/6	4 - 6	4	●	3.6	4.3 8 6.4	21	100 1492370000	H11/16
KQI-M5/6	4 - 6	5	●	3.6	5.3 10 6.4	22	100 1492380000	H11/16
KQI-M6/6	4 - 6	6	●	3.6	6.5 11 6.4	23	100 1492390000	H11/16
KQI-M8/6	4 - 6	8	●	3.6	8.4 14 6.4	26	100 1492400000	H11/16
KQI-M10/6	4 - 6	10	●	3.6	10.5 18 6.4	28	100 1492410000	H11/16
KQI-M12/6	4 - 6	12	●	3.6	13 18 6.4	28	100 1492420000	H11/16

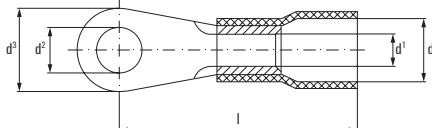

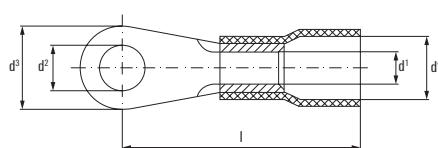**Ring terminal****Technical data**

Material:	Cu-ETP
Insulation:	PA
Surface:	tin plated
Temperature resistance:	-55 °C to +100 °C
Volt max.:	600 V

**Ordering data**

Type	Cross-section mm <sup>2</sup>	Flat hole M	Colour	Dimensions in mm	Qty.	Order No.	Tool recommendation
KQI-M5/10	10	5	●	4.5 5.3 10 8 24.5	50	1492430000	EPP 60 + HBG 60
KQI-M6/10	10	6	●	4.5 6.5 11 8 25.5	50	1492440000	
KQI-M8/10	10	8	●	4.5 8.4 14 8 28.5	50	1492450000	
KQI-M10/10	10	10	●	4.5 10.5 18 8 29.5	50	1492470000	
KQI-M5/16	16	5	●	5.8 5.3 11 10.5 31.5	50	1492480000	
KQI-M6/16	16	6	●	5.8 6.5 11 10.5 31.5	50	1492490000	
KQI-M8/16	16	8	●	5.8 8.4 14 10.5 33.5	50	1492500000	
KQI-M10/16	16	10	●	5.8 10.5 18 10.5 35.5	50	1492510000	


**Spade terminal****Technical data**


Material:	Cu
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	600 V

**Ordering data**

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	Dimensions in mm	Qty.	Order No.	Tool recommendation
LIS 1.5M3 V	0.5 - 1.5	●	M 3	1.7 3.2 5.7 4.0	17.8 11.3 0.75 100	9200290000	HBT 15
LIS 1.5M3.5 V	0.5 - 1.5	●	M 3.5	1.7 3.7 6.4 4.0	17.8 11.3 0.75 100	9200300000	
LIS 1.5M4 V	0.5 - 1.5	●	M 4	1.7 4.3 7.2 4.0	17.8 11.3 0.75 100	9200310000	
LIS 1.5M5 V	0.5 - 1.5	●	M 5	1.7 5.3 8.1 4.0	17.8 11.3 0.75 100	9200320000	
LIS 1.5M6 V	0.5 - 1.5	●	M 6	1.7 6.4 11.0 4.0	21.3 11.3 0.75 100	9200330000	
LIS 2.5M3 V	1.5 - 2.5	●	M 3	2.3 3.2 5.7 4.5	17.8 11.3 0.8 100	9200350000	
LIS 2.5M3.5 V	1.5 - 2.5	●	M 3.5	2.3 3.7 6.4 4.5	17.8 11.3 0.8 100	9200360000	
LIS 2.5M4 V	1.5 - 2.5	●	M 4	2.3 4.3 7.2 4.5	17.8 11.3 0.8 100	9200370000	
LIS 2.5M5 V	1.5 - 2.5	●	M 5	2.3 5.3 8.1 4.5	17.8 11.3 0.8 100	9200380000	
LIS 2.5M6 V	1.5 - 2.5	●	M 6	2.3 6.4 11.0 4.5	21.3 11.3 0.8 100	9200390000	
LIS 6.0M4 V	4 - 6	●	M 4	3.4 4.3 9.0 6.4	21.35 14.15 1 100	9200410000	
LIS 6.0M5 V	4 - 6	●	M 5	3.4 5.3 9.0 6.4	21.35 14.15 1 100	9200420000	
LIS 6.0M6 V	4 - 6	●	M 6	3.4 6.4 12.0 6.4	25.15 14.15 1 100	9200430000	
LIS 6.0M8 V	4 - 6	●	M 8	3.4 8.4 15 6.4	28 14.15 1 100	9200440000	
LIS 6.0M10 V	4 - 6	●	M 10	3.4 10.5 15 6.4	28 14.15 1 100	9200450000	

S1\* = Connection density

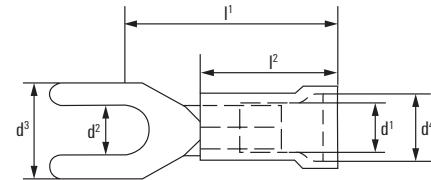

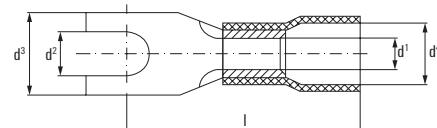

## Spade terminal


### Technical data

Material: Cu-ETP  
Insulation: PC or \* Insulation: PA  
Surface: tin plated S = small palm  
Temperature resistance: -40 °C to +100 °C (0.5 - 6 mm<sup>2</sup>) or -55 °C to +100 °C (10 - 16 mm<sup>2</sup>)  
Volt max.: 600 V



### Ordering data

Type	Cross-section mm <sup>2</sup>	Flat hole M	Colour	Dimensions in mm					Qty.	Order No.	Tool recommendation
KQIG-M3/1	0.5 - 1	C 3	●	d <sup>1</sup>	d <sup>2</sup>	d <sup>3</sup>	d <sup>4</sup>	l'	100	1492520000	HHT 15
KQIG-M3.5/1	0.5 - 1	C 3.5	●	1.6	3.7	6	4	17	100	1492530000	
KQIG-M4/S-1	0.5 - 1	C 4/S	●	1.6	4.3	6.8	4	18	100	1492540000	
KQIG-M4/1	0.5 - 1	C 4	●	1.6	4.3	8	4	18.1	100	1492550000	
KQIG-M5/1	0.5 - 1	C 5	●	1.6	5.3	10	4	19	100	1492580000	
KQIG-M6/1	0.5 - 1	C 6	●	1.6	6.5	11	4	21	100	1492590000	
KQIG-M3/2.5	1.5 - 2.5	C 3	●	2.3	3.2	5.5	4.5	19	100	1492600000	
KQIG-M3.5/2.5	1.5 - 2.5	C 3.5	●	2.3	3.7	6	4.5	17	100	1492610000	
KQIG-M4/S-2.5	1.5 - 2.5	C 4/S	●	2.3	4.3	6.8	4.5	18.7	100	1492620000	
KQIG-M4/2.5	1.5 - 2.5	C 4	●	2.3	4.3	8	4.5	18	100	1492630000	
KQIG-M5/2.5	1.5 - 2.5	C 5	●	2.3	5.3	10	4.5	20	100	1492640000	
KQIG-M6/2.5	1.5 - 2.5	C 6	●	2.3	6.5	11	4.5	22	100	1491260000	
KQIG-M4/6	4 - 6	C 4	●	3.6	4.3	8	6.4	21	100	1491270000	
KQIG-M5/6	4 - 6	C 5	●	3.6	5.3	10	6.4	22	100	1491280000	
KQIG-M6/6	4 - 6	C 6	●	3.6	6.5	11	6.4	23	100	1491290000	
KQIG-M8/6	4 - 6	C 8	●	3.6	8.4	14	6.4	26	100	1491310000	
KQIG-M10/6	4 - 6	C 10	●	3.6	10.5	18	6.4	28	100	1491320000	
KQIG-M5/10	10	C 5	●	4.5	5.3	10.5	8	24.1	50	1491330000*	
KQIG-M6/10	10	C 6	●	4.5	6.5	10.8	8	24.6	50	1491340000*	
KQIG-M6/16	16	C 6	●	5.8	6.5	11	11	32.2	50	1491350000*	
KQIG-M8/16	16	C 8	●	5.8	8.4	13.8	11	32.2	50	1491360000*	

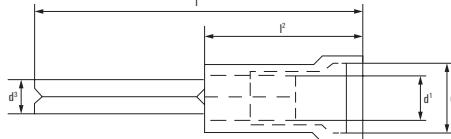

## Pin terminal


### Technical data

Material: Cu  
Insulation: PVC  
Surface: tin plated  
Temperature resistance: -10 °C to +70 °C  
Volt max.: 600 V



### Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions in mm					Qty.	Order No.	Tool recommendation
			d <sup>1</sup>	d <sup>3</sup>	d <sup>4</sup>	l	l'			
LIP 1.5R12 V	0.5 - 1.5	●	1.9	1.9	4	23.3	11.3	100	9200460000	HHT 15
LIP 2.5 R12 V	1.5 - 2.5	●	2.6	1.9	4.5	23.3	11.3	100	9200470000	
LIP 6.0R14 V	4 - 6	●	3.6	2.7	6.4	28.15	14.15	100	9200480000	

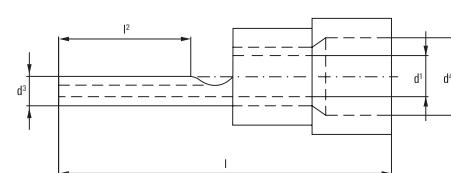

### Pin terminal DIN 46231



#### Technical data

Material:	Cu-HCP (0.1 - 0.5 mm <sup>2</sup> ) or Cu-ETP (0.5 - 35 mm <sup>2</sup> )
Insulation:	PC (or *PA)
Surface:	tin plated
Temperature resistance:	-40 °C to +100 °C (0.5 - 6 mm <sup>2</sup> ) or -55 °C to +100 °C (0.1 - 0.5 mm <sup>2</sup> ; 10 - 16 mm <sup>2</sup> )
Volt max.:	600 V

#### Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions in mm	d <sup>1</sup>	d <sup>3</sup>	d <sup>4</sup>	l	l <sup>2</sup>	Qty.	Order No.	Tool recommendation
KSI/0.1-0.5	0.1 - 0.5	●	1	1.2		2.2	18	9	100	1491370000*	H115
KSI/0.5-1.0	0.5 - 1	●	1.7	1.9		4	22.8	11	100	1491380000	
KSI/1.5-2.5	1.5 - 2.5	●	2.3	1.9		4.5	22.8	11	100	1491390000	
KSI/1.5-2.5	1.5 - 2.5	●	2.3	1.9		4.5	27	14	100	1491410000	
KSI/4-0.6-0	4 - 6	●	3.6	2.8		6.4	27	11	100	1491420000	
KSI/-10	10	●	4.5	2.4 x 4.3		7.8	34	12	50	1491430000*	
KSI/-16	16	●	5.8	2.5 x 5.6		9.1	40.7	13.5	50	1491440000*	

Ergonomic design

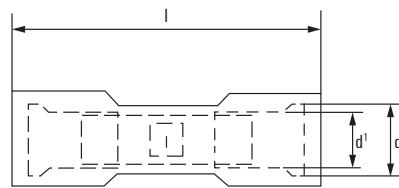

### Butt splice

#### Technical data

Material:	Cu
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	300 V



#### Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	d <sup>1</sup>	d <sup>4</sup>	l	Qty.	Order No.	Tool recommendation
LIB 1.5B25 VF	0.5 - 1.5	●	24.5	1.8	3.8	26	100	9200490000	H115
LIB 2.5B25 VF	1.5 - 2.5	●	24.5	2.4	4.3	26	100	9200500000	
LIB 6.0B26 VF	4 - 6	●	26.0	3.5	6	26	100	9200510000	

### Butt splice

#### Technical data



Material:	Cu-HCP (0.1 - 0.5 mm <sup>2</sup> ) or Cu-ETP (0.5 - 6 mm <sup>2</sup> )
Insulation:	PC (or *PA)
Surface:	tin plated
Temperature resistance:	-55 °C to +100 °C (0.1 - 0.5 mm <sup>2</sup> ) or -40 °C to +100 °C (0.5 - 6 mm <sup>2</sup> )
Volt max.:	600 V

Ergonomic design



#### Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions in mm	d <sup>1</sup>	d <sup>4</sup>	l	l <sup>2</sup>	Qty.	Order No.	Tool recommendation
VSTI/0.1-0.5	0.1 - 0.5	●	1.2	2		12	5	100	1491540000*	H115
VSTI/0.5-1.0	0.5 - 1	●	1.7	3.2		17	7	100	1491550000	
VSTI/1.5-2.5	1.5 - 2.5	●	2.3	4		17	7	100	1491560000	
VSTI/4-0.2.5	4 - 6	●	3.6	5.4		21.2	7	100	1491570000	

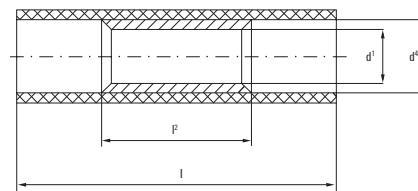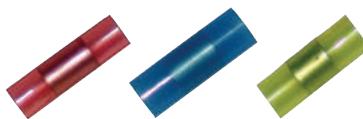**Butt splice****Technical data**

Material:	Cu-HCP
Insulation:	PA
Surface:	tin plated
Temperature resistance:	-55 °C to +100 °C
Volt max.:	600 V

**Ordering data**



Type	Cross-section mm <sup>2</sup>	Colour	Dimensions in mm	d <sup>1</sup>	d <sup>4</sup>	l	l <sup>2</sup>	Qty.	Order No.	Tool recommendation
VPL/0.1-0.5	0.1 - 0.5	Yellow	1.2 2	12	5			100	1491450000	HHT 16
VPL/0.5-1.0	0.5 - 1	Red	1.6 3.2	17	7			100	1491460000	
VPL/1.5-2.5	1.5 - 2.5	Blue	2.3 4	17	7			100	1491470000	
VPL/4.0-6.0	4 - 6	Yellow	3.6 5.4	21.2	7			100	1491480000	

**Female disconnector****Technical data**

Material:	Cu
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	600 V

**Ordering data**


Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	d <sup>1</sup>	d <sup>4</sup>	l	l <sup>2</sup>	w	Qty.	Order No.	Tool recommendation
LIF 1.5F288 R	0.5 - 1.5	Red	2.8 x 0.8	1.9	4.2	18.7	9.5	3.8	100	9200520000	HHT 16
LIF 1.5F488 R	0.5 - 1.5	Red	4.8 x 0.8	1.9	4.2	19.2	9.5	5.7	100	9200530000	
LIF 1.5F638 R	0.5 - 1.5	Red	6.3 x 0.8	1.9	4.2	20.3	10.0	7.4	100	9200540000	
LIF 2.5F488 R	1.5 - 2.5	Blue	4.8 x 0.8	2.6	5.0	19.2	9.5	5.7	100	9200550000	
LIF 2.5F638 R	1.5 - 2.5	Blue	6.3 x 0.8	2.6	5.0	20.3	10.0	7.4	100	9200560000	
LIF 6.0F638 R	4 - 6	Yellow	6.3 x 0.8	3.6	6.5	23.8	13.5	7.4	100	9200570000	

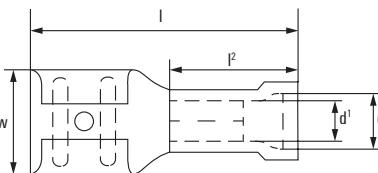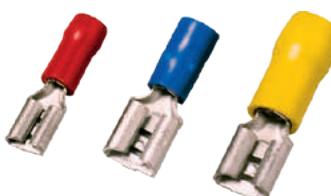**Female disconnector****Technical data**

Material:	Ms
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	300 V (0.5 - 1.5 mm <sup>2</sup> ) 600 V (1.5 - 6 mm <sup>2</sup> )


**Ordering data**

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	Dimensions in mm	Qty.	Order No.	Tool recommendation
VFSKHI/0.1-0.5/285	0.2 - 0.5	Yellow	2.8 x 0.5	16 6.4	100	1491620000	HHT 16
VFSKHI/0.1-0.5/288	0.2 - 0.5	Yellow	2.8 x 0.8	16 6.4	100	1491630000	
VFSKHI/0.5-1.0/285	0.5 - 1	Red	2.8 x 0.5	19 6.5	100	1491640000	
VFSKHI/0.5-1.0/288	0.5 - 1	Red	2.8 x 0.8	19 6.5	100	1491650000	
VFSKHI/0.5-1.0/485	0.5 - 1	Red	4.8 x 0.5	19.4 6.4	100	1491660000	
VFSKHI/0.5-1.0/488	0.5 - 1	Red	4.8 x 0.8	19.4 6.4	100	1491670000	
VFSKHI/0.5-1.0/638	0.5 - 1	Red	6.3 x 0.8	20.8 7.5	100	1491680000	
VFSKHI/1.5-2.5/285	1.5 - 2.5	Blue	2.8 x 0.5	19 6.5	100	1491730000	
VFSKHI/1.5-2.5/288	1.5 - 2.5	Blue	2.8 x 0.8	19 6.5	100	1491740000	
VFSKHI/1.5-2.5/485	1.5 - 2.5	Blue	4.8 x 0.5	19.4 6.4	100	1491690000	
VFSKHI/1.5-2.5/488	1.5 - 2.5	Blue	4.8 x 0.8	19.4 6.4	100	1491710000	
VFSKHI/1.5-2.5/638	1.5 - 2.5	Blue	6.3 x 0.8	20.8 7.3	100	1491720000	
VFSKHI/4.0-6.0/638	4 - 6	Yellow	6.3 x 0.8	23.3 7.3	100	1491750000	
VFSKHI/4.0-6.0/9512	4 - 6	Yellow	9.5 x 1.2	28.6 12	100	1491760000	

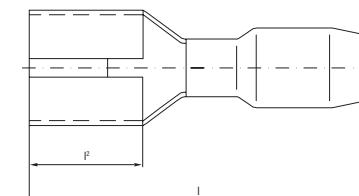

## Insulated connectors with flared isolation

www.nortecnica.pt

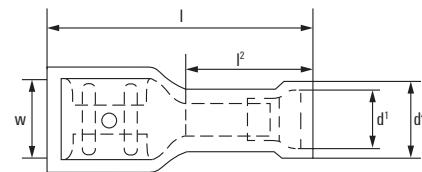Female disconnector  
full insulation

## Technical data

Material:	Cu
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	300 V



## Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	Dimensions in mm	Qty.	Order No.	Tool recommendation
LIF 1.5F638 RF	0.5 - 1.5	●	6.3 x 0.8	d <sup>1</sup> 1.9, d <sup>4</sup> 4.0, l 22.0, l <sup>2</sup> 10.5, w 6.6	100	9200640000	HHT15
LIF 2.5F638 RF	1.5 - 2.5	●	6.3 x 0.8	d <sup>1</sup> 2.6, d <sup>4</sup> 5.0, l 22.0, l <sup>2</sup> 10.5, w 6.6	100	9200650000	
LIF 6.0F638 RF	4 - 6	●	6.3 x 0.8	d <sup>1</sup> 3.6, d <sup>4</sup> 6.8, l 24.5, l <sup>2</sup> 13.0, w 6.6	100	9200660000	CTI6 + CTI6G

Female disconnector  
full insulation


## Technical data

Material:	Ms
Insulation:	PA
Surface:	tin plated
Temperature resistance:	-55 °C to +100 °C
Volt max.:	600 V



## Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	Dimensions in mm	Qty.	Order No.	Tool recommendation
VFSKHV/0.5-1.0/285	0.5 - 1	●	2.8 x 0.5	l 19.2, d <sup>1</sup> 6.4	100	1491860000	HHT15
VFSKHV/0.5-1.0/288	0.5 - 1	●	2.8 x 0.8	l 19.2, d <sup>1</sup> 6.4	100	1491870000	
VFSKHV/0.5-1.0/485	0.5 - 1	●	4.8 x 0.5	l 20.2, d <sup>1</sup> 6.4	100	1491880000	
VFSKHV/0.5-1.0/488	0.5 - 1	●	4.8 x 0.8	l 20.2, d <sup>1</sup> 6.4	100	1491890000	
VFSKHV/0.5-1.0/638	0.5 - 1	●	6.3 x 0.8	l 21.5, d <sup>1</sup> 7.3	100	1491910000	
VFSKHV/1.5-2.5/485	1.5 - 2.5	●	4.8 x 0.5	l 20.2, d <sup>1</sup> 6.5	100	1491920000	
VFSKHV/1.5-2.5/488	1.5 - 2.5	●	4.8 x 0.8	l 20.2, d <sup>1</sup> 6.5	100	1491930000	
VFSKHV/1.5-2.5/638	1.5 - 2.5	●	6.3 x 0.8	l 21.5, d <sup>1</sup> 7.3	100	1491940000	
VFSKHV/4.0-6.0/638	4 - 6	●	6.3 x 0.8	l 24.2, d <sup>1</sup> 7.3	100	1491950000	

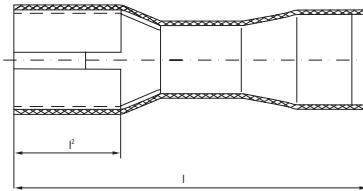

## Male disconnector


## Technical data

Material:	Cu
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	600 V



## Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	Dimensions in mm	Qty.	Order No.	Tool recommendation
LIF 1.5M638 R	0.5 - 1.5	●	6.3 x 0.8	d <sup>1</sup> 1.9, d <sup>4</sup> 4.2, l 20.8, l <sup>2</sup> 10.0, w 6.3	100	9200580000	HHT15
LIF 2.5M638 R	1.5 - 2.5	●	6.3 x 0.8	d <sup>1</sup> 2.6, d <sup>4</sup> 5.0, l 20.8, l <sup>2</sup> 9.5, w 6.3	100	9200590000	
LIF 6.0M638 R	4 - 6	●	6.3 x 0.8	d <sup>1</sup> 3.6, d <sup>4</sup> 6.5, l 23.8, l <sup>2</sup> 13.0, w 6.3	100	9200600000	CTI6 + CTI6G

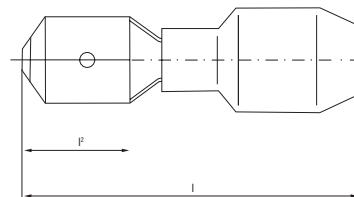

### Male disconnector

#### Technical data

Material:	Ms
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	600 V



#### Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	Dimensions in mm	Qty.	Order No.	Tool recommendation
FSKI/0.5-1.0/288	0.5	●	2.8 x 0.8	19.2 6.5	100	1491790000	HHT 15
FSKI/0.5-1.0/488	0.5	●	4.8 x 0.8	19.8 6.7	100	1491810000	CT16 + CT16
FSKI/0.5-1.0/638	0.5	●	6.3 x 0.8	21.8 7.7	100	1491820000	
FSKI/1.5-2.5/488	1.5 - 2.5	●	4.8 x 0.8	19.8 6.7	100	1491850000	
FSKI/1.5-2.5/638	1.5 - 2.5	●	6.3 x 0.8	21.8 7.7	100	1491830000	
FSKI/4.0-6.0/638	4 - 6	●	6.3 x 0.8	24 7.7	100	1491840000	

### Piggy back disconnector



#### Technical data

Material:	Cu
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	600 V



#### Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	Dimensions in mm	Qty.	Order No.	Tool recommendation
LIF 1.5T638 R	0.5 - 1.5	●	6.3 x 0.8	d <sup>4</sup> 22 10.0 6.6	100	9200610000	HHT 15
LIF 2.5T638 R	1.5 - 2.5	●	6.3 x 0.8	5 2 10.0 6.6	100	9200620000	CT16 + CT16
LIF 6.0T638 R	4 - 6	●	6.3 x 0.8	6.5 3.5 13.5 6.6	100	9200630000	CT16 + CT16

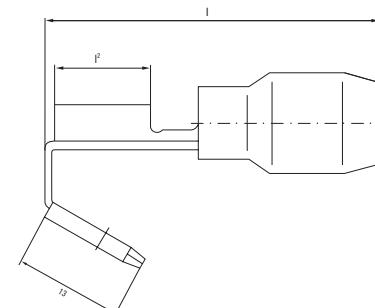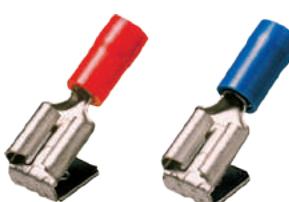

### Piggy back disconnector

#### Technical data

Material:	Ms
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	600 V




#### Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions	Dimensions in mm	Qty.	Order No.	Tool recommendation
VSTVI/0.5-1.0	0.5 - 1	●	6.3 x 0.8	23.9 8 8.2	100	1491770000	HHT 15
VSTVI/1.5-2.5	1.5 - 2.5	●	6.3 x 0.8	23 8 8.2	100	1491780000	CT16 + CT16

## Insulated connectors with flared isolation

www.nortecnica.pt

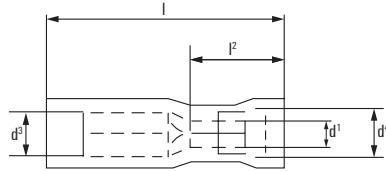

## Female bullet disconnector

## Technical data

Material:	Cu
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	300 V



## Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Pin Ø	Dimensions in mm	Qty.	Order No.	Tool recommendation
LID 1.5F4 RF	0.5 - 1.5	●	4	1.9 3.86 4.2 23.0 10.5	100	9200700000	H1115
LID 2.5F5 RF	1.5 - 2.5	●	5	2.6 4.85 5.0 24 10.5	100	9200710000	C116 + C116
LID 6.0F5 RF	4 - 6	●	5	3.6 4.85 6.5 27.4 11	100	9200720000	

## Male bullet disconnector


## Technical data

Material:	Cu
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	300 V



## Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Pin Ø	Dimensions in mm	Qty.	Order No.	Tool recommendation
LID 1.5M4 R	0.5 - 1.5	●	4	1.9 3.96 4.2 20.8 10.0	100	9200670000	H1115
LID 2.5M5 R	1.5 - 2.5	●	5	2.6 4.95 5.0 21.1 11.3	100	9200680000	C116 + C116
LID 6.0M5 R	4 - 6	●	5	3.6 4.95 6.5 23.8 13.0	100	9200690000	

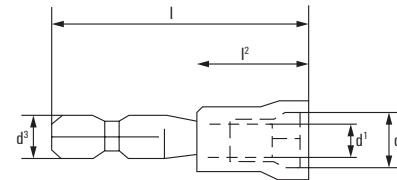

## Female bullet disconnector


## Technical data



Material:	Mn
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	600 V



## Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Pin Ø	Dimensions in mm	Qty.	Order No.	Tool recommendation
VRSHV/0.5-1.0	0.5 - 1	●	4	23.3	100	1491980000	H1115
VRSHVI/1.5-2.5	1.5 - 2.5	●	5	23.3	100	1491990000	
VRSHVI/4.0-6.0	4 - 6	●	5	25.1	100	1492010000	C116 + C116

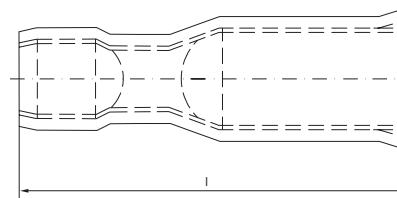

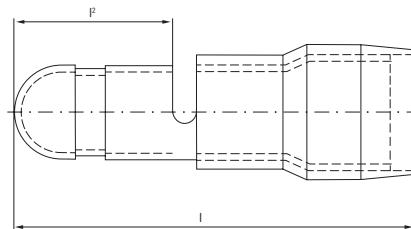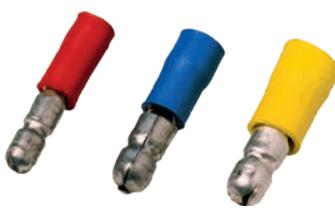

### Male bullet disconnector

#### Technical data

Material:	Ms
Insulation:	PVC
Surface:	tin plated
Temperature resistance:	-10 °C to +70 °C
Volt max.:	600 V

#### Ordering data


Type	Cross-section mm <sup>2</sup>	Colour	Dimensions in mm	Qty.	Order No.	Tool recommendation	
VRSTI/0.5-1.0	0.5 - 1	●	Pin Ø 4, I 21.5, I <sup>2</sup> 8.5	100	1492040000	H116	
VRSTI/1.5-2.5	1.5 - 2.5	●	5	21.2	8.5	1492050000	G116
VRSTI/4.0-6.0	4 - 6	●	5	24	8.5	1492060000	C116 + C116



### Female bullet disconnector completely insulated

#### Technical data

Material:	Ms
Insulation:	PA
Surface:	tin plated
Temperature resistance:	-55 °C to +100 °C
Volt max.:	600 V

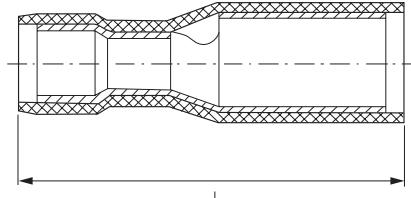

#### Ordering data


Type	Cross-section mm <sup>2</sup>	Colour	Dimensions in mm	Qty.	Order No.	Tool recommendation	
VRSHVI/0.5-1.0	0.5 - 1	●	Pin Ø 4, I 25.2	100	1492020000	H116	
VRSHVI/1.5-2.5	1.5 - 2.5	●	4	25.2	100	1492030000	G116 + C116



### Male bullet disconnector completely insulated

#### Technical data

Material:	Ms
Surface:	PA
Temperature resistance:	-55 °C to +100 °C
Volt max.:	600 V

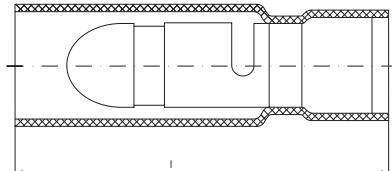


#### Ordering data

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions in mm	Qty.	Order No.	Tool recommendation	
VRSTI/0.5-1.0	0.5 - 1	●	Pin Ø 4, I 27	100	1492070000	H116	
VRSTI/1.5-2.5	1.5 - 2.5	●	4	27	100	1492080000	G116 + C116



## Insulated connectors with flared isolation

www.nortecnica.pt

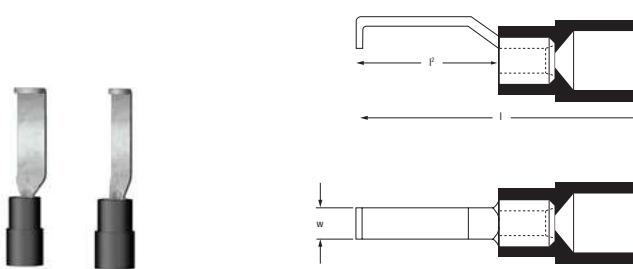**Hooked blade connector**

to ESI 50-18 part 2

## Technical data

Material:	Cu
Insulation:	PVC
Surface:	tin plated

Temperature resistance: -10 °C to +70 °C

**Ordering data**



Type	Cross-section mm <sup>2</sup>	Colour	Dimensions in mm	Qty.	Order No.	Tool recommendation
HB 1-17	0.25 - 1.5	●	27.2 16.75 4.6	100	9036290000	H115
HB 1-13	1.0 - 2.5	●	27.2 16.75 3.0	100	9036300000	CT16

**Hooked blade connector**

Technical data	
Material:	Cu
Insulation:	PC
Surface:	tin plated

**Ordering data**

Type	Cross-section mm <sup>2</sup>	Colour	Dimensions in mm	Qty.	Order No.	Tool recommendation
HBT 1.5 - 4.6 RT	0.5 - 1.5	●	4 28.4 17.4 2.1	100	1233340000	H115
HBT 1.5 - 3.0 RT	0.5 - 1.5	●	4 28.4 17.4 2.1	100	1312440000	
HBT 2.5 - 4.6 BL	1.5 - 2.5	●	4.5 28.2 17.4 2.1	100	1233330000	
HBT 2.5 - 3.0 BL	1.5 - 2.5	●	4.5 28.2 17.4 2.1	100	1312450000	
HBT 6.0 - 3.0 GE	4.0 - 6.0	●	6.4 30.2 17.2 2.8	100	1312470000	
HBT 6.0 - 4.6 GE	4.0 - 6.0	●	6.4 30.2 17.2 2.8	100	1216230000	

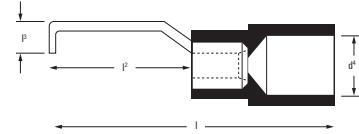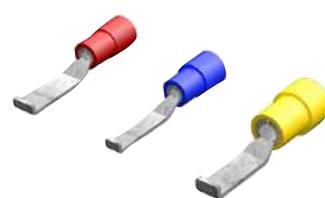

# Cable lugs

<b>Cable lugs</b>	Technical data / general notes	K.2
Tubular cable lugs, copper, euro-series		K.8
Tubular cable lugs with angle, copper, euro-series		K.12
Joint connector, copper, euro-series		K.15
Crimp cable lugs, copper, DIN 46235		K.16
Tubular compression connectors, copper, DIN 46267 part 1		K.20
Terminals ring and fork-type, noninsulated		K.22
Pin cable lugs DIN 46230, noninsulated		K.26
Parallel connectors and joint connector, noninsulated		K.27

# Cable lugs

## Technical data / general information

### Conductor cross section comparison

comparable ISO-cross section in (mm <sup>2</sup> )	AWG	AWG/ MCM
0.14	26	0.128
0.2	24	0.205
0.34	22	0.325
0.5	20	0.519
0.75	18	0.823
1	-	-
1.5	16	1.31
2.5	14	2.08
4	12	3.31
6	10	5.27
10	8	8.35
16	6	13.3
25	4	21.2
35	2	33.6
-	1	42.4
50	0	53.4
70	00	67.5
95	000	85.0
-	0000	107.2
120	250 MCM	127
150	300 MCM	152
185	350 MCM	177
240	500 MCM	253
300	600 MCM	304
400	800 MCM	405.36

## Electrical characteristics

Maximum allowable current load of cable lugs and connectors  
in conjunction with insulated conductors (at ambient temperature +30 °C)

nominal cross section (mm <sup>2</sup> )	Single core cable	Multicore cables + cords, excl. home- and portable apparatus	Multicore heavy duty rubber cables
	- rubber insulated - PVC insulated - TPE insulated - heat resistant	- rubber insulated - PVC insulated - TPE insulated - heat resistant	min. 0.6 / 1kV
0.75	15	12	-
1	19	15	-
1.5	24	18	23
2.5	32	26	30
4	42	34	41
6	54	44	53
10	73	61	74
16	98	82	99
25	129	108	131
35	158	135	162
50	198	168	202
70	245	207	250
95	292	250	301
120	344	292	-
150	391	335	-
185	448	382	-
240	528	453	-
300	608	523	-

sources of current ratings:  
DIN VDE 0298-4:2013-06  
Table 11, columnne 2

DIN VDE 0298-4:2013-06  
Table 11, columnne 5

DIN VDE 0298-4:2013-06  
Table 15, columnne 4+2

### Note:

Design of these tables deviates from VDE 0298-4 design.

In case of doubt, appliance of the current issue of the DIN VDE 0298-4 is obligatory.



Above Table values have to be taken into consideration of further applicable converting / derating factors:

- other ambient temperatures: DIN VDE 0298-4
- pay attention to the maximum electric current of the used equipment
- pay attention to the maximum current load of the used cable under consideration of the laying procedure

# Assembly of cable lugs and connectors

## general

1. Take the measurements of the cable lugs / connectors and their allocation of cross section out of this catalogue.
2. Cut the cable right-angled to the conductor. Strip off the insulation of the cable. The part to be stripped off has to be as long as the sleeve (measurement a) of the cable lug / connector + about 10 %.
3. Before crimping clean the conductor with a wire brush in order to remove dirt and oxidation. Sectorshaped conductors must be rounded before crimping!
4. Insert the noninsulated conductor into the compression sleeve until it reaches the wire stop.
5. Before starting to crimp please check whether conductor and cable lug respectively connector have the same cross section and do fit to each other according to our catalogue.
6. Please check whether crimping tool and crimping dies are suitable for the cable lugs/connectors you want to crimp. You can take this information for each series and cross section from the manufacturer's catalogue or the operating instructions of the tool.
7. The crimping process is evaluated, on the cable lug and connector, from the cable end to the end of the sleeve.(see illustration).

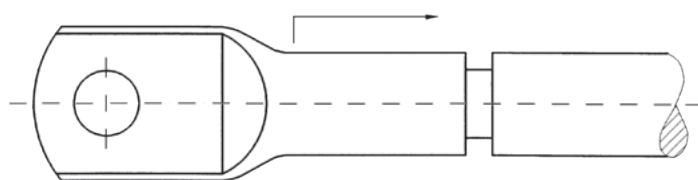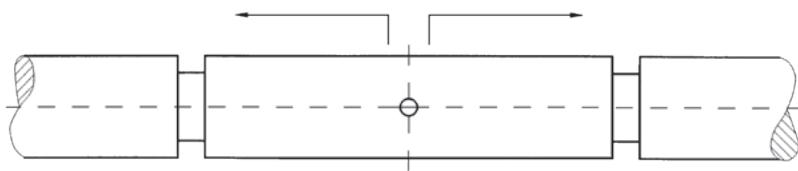

For the quantity of crimpings take notice of the preceding charts.  
(These you are able to find on the following page)

# Tensile forces – min. specified value

## Tensile forces during mechanical testing for crimp and press connection

Cross section mm <sup>2</sup>	Values for crimpings up to 10 mm <sup>2</sup> (except end ferrules) (DIN EN 60352-2 release 2014-4) and (IEC 61210 edition 2.0 release 2010-8)			Additional information from the standards for electrical tests:		
	AWG	Extract values > [N]	Extract values > [N]			
0.22	24	28				
0.25		32				
0.34	22	40				
0.5	20	60				
0.75		85				
0.82	18	90				
1		108				
1.3	16	135				
1.5		150				
2.1	14	200				
2.5		230				
3.3	12	275				
4		310				
5.3	10	355				
6		360				
8.4	8	370				
10		380				
Values for crimp connections up to 2.5-1200 mm <sup>2</sup> (except ferrules) (DIN IEC 61238-2 (up to 1 kV)-3 (1 kV up to 36 kV) release 2019-11)						
Class 1			Class 2			
Extract values Set value [N]	Extract values -5% [N]	Extract values +5% [N]	Extract values Set value [N]	Extract values -5% [N]	Extract values +5% [N]	
2.5	150	142.5	157.5	150	142.5	157.5
4	240	228	252	240	228	252
6	360	342	378	360	342	378
10	600	570	630	600	570	630
16	960	912	1008	960	912	1008
25	1500	1425	1575	1500	1425	1575
35	2100	1995	2205	2100	1995	2205
50	3000	2850	3150	3000	2850	3150
70	4200	3990	4410	4200	3990	4410
95	5700	5415	5985	5700	5415	5985
120	7200	6840	7560	7200	6840	7560
150	9000	8550	9450	9000	8550	9450
185	11100	10545	11655	11100	10545	11655
240	14400	13680	15120	14400	13680	15120
300	18000	17100	18900	18000	17100	18900
400	20000	19000	21000	24000	22800	25200
500	20000	19000	21000	30000	28500	31500
625	20000	19000	21000	37500	35625	39375
800	20000	19000	21000	48000	45600	50400
1000	20000	19000	21000	60000	57000	63000
1200	20000	19000	21000	72000	68400	75600

**Note** Values refer to conductors according to IEC 60228 (solid, stranded, fine and superfine).  
The test is carried out on 3 samples  
According to the standard, the ladder may slip < 3 mm at 100% test load, we recommend no slipping during the test  
We recommend checking the values according to DIN EN 60352-2 for the cross-sections 2.5 and 4 mm<sup>2</sup>

# Crimping instructions for euro-series

## Crimping instructions

Minimum necessary crimping quantity of cable lugs and connectors for euro-series. (WM-crimping):

## Crimping tools and order numbers

Cross section in mm	crimping quantity x width	PZ RK 6/70 1500440000	PZRK 10/120 1500450000	EPG 45 1500830000	EPG 60 2453810000	HPG 60 2453820000	APG 80 1502390000
6	1 x 5 mm 1 x 7 mm						
10	1 x 5 mm 1 x 7 mm						
16	2 x 5 mm 1 x 7 mm						
25	2 x 5 mm 1 x 12 mm						
35	2 x 5 mm 1 x 10 mm 1 x 12 mm						
50	2 x 5 mm 1 x 12 mm						
70	2 x 5 mm 1 x 12 mm						
95	2 x 5 mm 1 x 12 mm						
120	3 x 5 mm 1 x 10 mm						
150	3 x 5 mm						
185	3 x 5 mm 2 x 10 mm						
240	3 x 5 mm 3 x 7 mm						
300	4 x 5 mm 3 x 7 mm						
400	4 x 7 mm						

# Crimping instructions for DIN 46235-series and DIN 46267-series

## Crimping instructions

Minimum necessary crimping quantity of cable lugs and connectors  
for DIN 46235-series and DIN 46267-series (Hexagonal-shape-crimping):


## Crimping tools and order numbers

cross section in mm <sup>2</sup>	die code	crimping quantity x width	PZ PK 6/70 1500470000	PZ PK 10/120 1500480000	EPG 45 1500830000	EPG 60 2453810000	HPG 60 2453820000	APG 80 1502390000
6	5	1 x 5 mm 1 x 7 mm						
10	6	1 x 5 mm 1 x 7 mm						
16	8	2 x 5 mm 1 x 12 mm						
25	10	2 x 5 mm 1 x 12 mm						
35	12	2 x 5 mm 1 x 10 mm 1 x 12 mm						
50	14	3 x 5 mm 1 x 12 mm						
70	16	3 x 5 mm 1 x 12 mm						
95	18	4 x 5 mm 2 x 10 mm						
120	20	4 x 5 mm 2 x 10 mm						
150	22	4 x 5 mm 2 x 10 mm						
185	25	4 x 5 mm 2 x 10 mm						
240	28	4 x 5 mm 2 x 13 mm						
300	32	4 x 5 mm 4 x 7 mm						

## Tubular cable lugs and connectors, copper euro-series

K

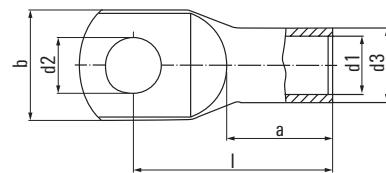

**Tubular cable lugs 0.5 – 25 mm<sup>2</sup>,****euro-series****Technical data**

Material: Cu according to DIN EN 13600  
Surface: tin plated  
Approvals:

**Ordering data**


	Cross-section mm <sup>2</sup>	flat hole M	d1	d3	d2	b	l	a	Qty. (pcs.)	Order No.	Tool recommendation
KRN-M3/-0,75	0.5 - 0.75	3	1.4	3	3.2	6.5	12.5	6	100	1495010000*	HZN 21
KRN-M4/-0,75		4			4.3	8.5	14		100	1495020000*	
KRN-M5/-0,75		5			5.3	10	15		100	1495030000*	
KRN-M3/-1,5	1.0 - 1.5	3	1.9	3.9	3.2	6.5	14	6	100	1495040000*	
KRN-M4/-1,5		4			4.3	8.5	15		100	1495050000*	
KRN-M5/-1,5		5			5.3	10	16		100	1495070000*	
KRN-M6/-1,5		6			6.4	11	18		100	1495080000*	
KRN-M4/-2,5	2.5	4	2.4	4.4	4.3	8.5	15	6.5	100	1495090000*	
KRN-M5/-2,5		5			5.3	10	16		100	1495100000*	
KRN-M6/-2,5		6			6.4	11	18		100	1495110000*	
KRN-M8/-2,5		8			8.4	13	20		100	1495120000*	
KRN-M4/-4	4	4	3	5	4.3	8.5	17	8	100	1495130000*	
KRN-M5/-4		5			5.3	10	18		100	1495140000*	
KRN-M6/-4		6			6.4	11	20		100	1495150000*	
KRN-M8/-4		8			8.4	14	22		100	1495170000*	
KRN-M4/-6	6	4	3.5	6.5	4.3	10	19	9	100	1497150000	
KRN-M5/-6		5			5.3	10	20		100	1497170000	
KRN-M6/-6		6			6.4	11	21.5		100	1497180000	
KRN-M8/-6		8			8.4	15	24		100	1497190000	
KRN-M10/-6		10			10.5	18	26		100	1497200000	
KRN-M12/-6		12			13	19	27.5		100	1497210000	
KRN-M4/-10	10	4	4.5	7	4.3	12	20	10	100	1496900000	
KRN-M5/-10		5			5.3	12	21		100	1496910000	
KRN-M6/-10		6			6.4	12	22.5		100	1496920000	
KRN-M8/-10		8			8.4	15	25		100	1496930000	
KRN-M10/-10		10			10.5	18	27		100	1496940000	
KRN-M12/-10		12			13	20	28.5		100	1496950000	
KRN-M5/-16	16	5	5.5	8.5	5.3	12	25	13	100	1496970000	
KRN-M6/-16		6			6.4	12	26.5		100	1496980000	
KRN-M8/-16		8			8.4	15	29		100	1496990000	
KRN-M10/-16		10			10.5	18	31		100	1497000000	
KRN-M12/-16		12			13	19	32		100	1497010000	
KRN-M5/-25	25	5	7	10	5.3	15	33.5	15	100	1495830000	
KRN-M6/-25		6			6.4	15	31.5		100	1496490000	
KRN-M8/-25		8			8.4	16	33		100	1496500000	
KRN-M10/-25		10			10.5	18	34.5		100	1496510000	
KRN-M12/-25		12			13	20	36		100	1496520000	
KRN-M14/-25		14			15	22	39		100	1496530000	

\* UL not tested

## Tubular cable lugs 35 – 300 mm<sup>2</sup>, euro-series

### Technical data


Material: Cu according to DIN EN 13600  
Surface: tin plated  
Approvals:

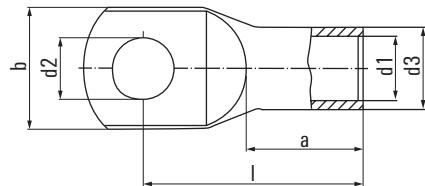

### Ordering data

Type	Cross section mm <sup>2</sup>	flat hole M	d1	d3	d2	b	l	a	weight 100 pcs./kg	Qty (pcs.)	Order No.	Tool recommendation
KRN-M6/35	35	6	8.5	12	6.4	17	33	17	2.07	100	1496540000	PZK 6/70
KRN-M8/35		8			8.4	17	34		2.18	100	1496550000	
KRN-M10/35		10			10.5	20	36.5		2.19	100	1496570000	
KRN-M12/35		12			13	22	37.5		2.33	100	1496580000	
KRN-M6/-50	50	6	10	14	6.4	20	37	19	3.01	100	1496590000	APG 80
KRN-M8/-50		8			8.4	20	39		3.04	100	1496600000	
KRN-M10/-50		10			10.5	20	40.5		3.13	100	1496610000	
KRN-M12/-50		12			13	23	42		3.13	100	1496620000	
KRN-M14/-50		14			15	23	44		3.51	100	1495750000	
KRN-M16/-50		16			17	27	46		3.55	100	1496630000	
KRN-M20/-50		20			21	30.5	52.5		3.89	100	1495840000	
KRN-M6/-70	70	6	12	16.5	6.4	24	40.5	21	4.11	25	1496640000	
KRN-M8/-70		8			8.4	24	42.5		4.46	25	1496650000	
KRN-M10/-70		10			10.5	24	43.5		4.64	25	1496670000	
KRN-M12/-70		12			13	24	45		4.73	25	1495570000	
KRN-M14/-70		14			15	25	46		4.91	25	1495770000	
KRN-M16/-70		16			17	28	48.5		4.96	25	1495580000	
KRN-M20/-70		20			21	29	52		5.29	25	1495590000	
KRN-M6/-95	95	6	13.5	18	6.4	26	43	23	4.95	25	1495820000	
KRN-M8/-95		8			8.4	26	46		5.36	25	1495600000	
KRN-M10/-95		10			10.5	26	47		5.51	25	1495610000	
KRN-M12/-95		12			13	26	48		5.51	25	1495620000	
KRN-M14/-95		14			15	26	51.5		5.89	25	1495780000	
KRN-M16/-95		16			17	28	51		5.85	25	1495630000	
KRN-M20/-95		20			21	30	55		6.13	25	1495640000	
KRN-M8/-120	120	8	15	20	8.4	29	49.5	26	6.88	25	1495790000	
KRN-M10/-120		10			10.5	29	52		7.99	25	1495650000	
KRN-M12/-120		12			13	29	51.5		7.84	25	1495670000	
KRN-M14/-120		14			15	30	53		7.86	25	1495800000	
KRN-M16/-120		16			17	30	55		8.07	25	1495680000	
KRN-M20/-120		20			21	35	60		8.90	25	1495690000	
KRN-M8/-150	150	8	16.8	21.3	8.4	31	55.5	29	7.89	25	1495700000	
KRN-M10/-150		10			10.5	31	56.5		8.37	25	1495710000	
KRN-M12/-150		12			13	31	56		8.07	25	1495720000	
KRN-M14/-150		14			15	31	57		8.30	25	1495810000	
KRN-M16/-150		16			17	31	58		8.36	25	1495730000	
KRN-M20/-150		20			21	35	63		8.75	25	1495740000	
KRN-M8/-185	185	8	19	24	8.4	35	58	30	10.37	25	1497290000*	
KRN-M10/-185		10			10.5	35	59		10.61	25	1495430000	
KRN-M12/-185		12			13	35	58.5		10.60	25	1495440000	
KRN-M14/-185		14			15	35	61		10.72	25	1497250000	
KRN-M16/-185		16			17	35	63		10.86	25	1495450000	
KRN-M20/-185		20			21	35	66		11.33	25	1495470000	
KRN-M8/-240	240	8	21	26	8.4	38	67	35	12.40	25	1495480000*	
KRN-M10/-240		10			10.5	38	67		12.97	25	1495490000	
KRN-M12/-240		12			13	38	67		13.02	25	1495500000	
KRN-M14/-240		14			15	38	69		13.36	25	1497270000	
KRN-M16/-240		16			17	38	69.5		13.56	25	1495510000	
KRN-M20/-240		20			21	38	71		13.80	25	1495520000	
KRN-M10/-300	300	10	24	30	10.5	44	79.5	42	20.45	20	1495530000*	
KRN-M12/-300		12			13	44	82		21.18	20	1495540000	
KRN-M14/-300		14			15	44	84		22.19	20	1497280000	
KRN-M16/-300		16			17	44	85		21.94	20	1495550000	
KRN-M20/-300		20			21	44	85		22.40	20	1497240000	
KRN-M10/-400	400	10	27.5	33.5	10.5	49	92	47	27.9	15	2578020000	
KRN-M12/-400		12			13	49	92		27.85	15	2578030000	
KRN-M16/-400		16			17	49	92		27.65	15	2578040000	
KRN-M20/-400		20			21	49	92		26.61	15	2578050000	

\* UL not tested

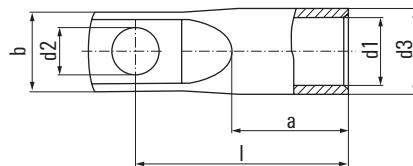

## Tubular cable lugs 35 – 300 mm<sup>2</sup>, euro-series, with narrow flange

### Technical data

Material: Cu according to DIN EN 13600  
Surface: tin plated

Approvals:




### Ordering data

Type	Cross section mm <sup>2</sup>	flat hole M	dimensions in mm					weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
			d1	d3	d2	b	l				
KRN-M6/35 S	35	6	8.5	12	6.4	15	33	17	1.93	25	1494790000
KRN-M8/35 S		8			8.4	15	35		1.90	25	1494810000*
KRN-M6/50 S	50	6	10	14	6.4	15	37	19	2.69	25	1494820000
KRN-M8/50 S		8			8.4	17	39		2.79	25	1494830000
KRN-M10/50 S		10			10.5	17	41		2.99	25	1494840000
KRN-M6/70 S	70	6	11.8	16.5	6.4	17	41	21	3.99	25	1494850000
KRN-M8/70 S		8			8.4	17	43		4.38	25	1494860000
KRN-M10/70 S		10			10.5	17	45		4.40	25	1494870000
KRN-M12/70 S		12			13	19	46		4.48	25	1494880000
KRN-M6/95 S	95	6	13.5	18	6.4	19	43	23	4.67	25	1494430000
KRN-M8/95 S		8			8.4	19	45		4.90	25	1494890000
KRN-M10/95 S		10			10.5	19	47		5.10	25	1494900000
KRN-M12/95 S		12			13	19	48		5.20	25	1494910000
KRN-M6/120 S	120	6	14.7	20	6.4	20	49	26	6.43	10	1494410000
KRN-M8/120 S		8			8.4	20	51		7.12	10	1494420000
KRN-M10/120 S		10			10.5	20	53		6.70	10	1494920000
KRN-M12/120 S		12			13	20	54		7.12	10	1494930000
KRN-M6/150 S	150	6	16.3	21.3	6.4	19	53	29	7.01	10	1494440000
KRN-M8/150 S		8			8.4	19	55		7.31	10	1494940000
KRN-M10/150 S		10			10.5	19	56		7.63	10	1494950000
KRN-M12/150 S		12			13	22	59		7.63	10	1494970000
KRN-M10/185 S	185	10	18.7	24	10.5	26	60	30	10.47	10	1494980000
KRN-M12/185 S		12			13	26	59.5		10.27	10	1494990000
KRN-M16/185 S		16			17	26	64		10.81	10	1495000000
KRN-M10/240 S	240	10	21	26	10.5	30	65	35	12.80	5	1494340000
KRN-M12/240 S		12			13	30	65		11.71	5	1494350000
KRN-M16/240 S		16			17	30	68		12.11	5	1494370000
KRN-M10/300 S	300	10	23.5	30	10.5	30	76	42	19.66	5	1494380000*
KRN-M12/300 S		12			13	30	79		20.08	5	1494390000*
KRN-M16/300 S		16			17	30	81		20.60	5	1494400000*

\* UL not tested


**Tubular cable lugs with 90° angle,  
0.5 – 35 mm<sup>2</sup>, euro-series**
**Technical data**

Material: Cu according to DIN EN 13600  
 Surface: tin plated  
 Approvals:

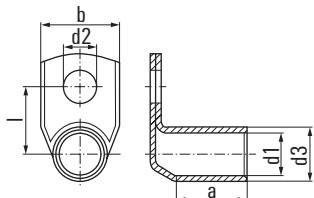**Ordering data**

Type	Cross-section mm <sup>2</sup>	flat hole M	dimensions in mm	weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
KWN-M3/0,75 90	0.5 - 0.75	3	1.4 3 3.2 6.5 7.5 5	0.09	100	1495180000*	HFM 21
KWN-M4/0,75 90		4	4.3 8.5 8.5	0.10	100	1495190000*	
KWN-M5/0,75 90		5	5.3 10 9.5	0.10	100	1495200000*	
KWN-M3/1,5 90	1.0 - 1.5	3	1.9 3.9 3.2 6.5 8 5	0.16	100	1495210000*	
KWN-M4/1,5 90		4	4.3 8.5 9	0.16	100	1495220000*	
KWN-M5/1,5 90		5	5.3 10 10	0.16	100	1495230000*	
KWN-M6/1,5 90		6	6.4 11 12	0.15	100	1495240000*	
KWN-M4/2,5 90	2.5	4	2.4 4.4 4.3 8.5 9.2 5.5	0.18	100	1495250000*	
KWN-M5/2,5 90		5	5.3 10 10.2	0.18	100	1495270000*	
KWN-M6/2,5 90		6	6.4 11 12.2	0.22	100	1495280000*	
KWN-M8/2,5 90		8	8.4 14 14.2	0.23	100	1495290000*	
KWN-M4/4 90	4	4	3 5 4.3 8.5 9.5 7	0.25	100	1495300000*	
KWN-M5/4 90		5	5.3 10 10.5	0.24	100	1495310000*	
KWN-M6/4 90		6	6.4 11 12.5	0.29	100	1495320000*	
KWN-M8/4 90		8	8.4 14 14.5	0.30	100	1495330000*	
KWN-M4/6 90	6	4	3.5 6.5 4.3 10 10.3 8	0.52	100	1497220000	
KWN-M5/6 90		5	5.3 11 11.2	0.56	100	1496120000	
KWN-M6/6 90		6	6.4 11 13.3	0.62	100	1496130000	
KWN-M8/6 90		8	8.4 15 15.3	0.64	100	1496140000	
KWN-M10/6 90		10	10.5 18 17.2	0.68	100	1496150000	
KWN-M12/6 90		12	13 20 18.2	0.66	100	1496170000	
KWN-M5/10 90	10	5	4.5 7 5.3 12 11.5 9	0.54	100	1497020000	
KWN-M6/10 90		6	6.4 12 12.5	0.59	100	1497030000	
KWN-M8/10 90		8	8.4 15 15.5	0.67	100	1497040000	
KWN-M10/10 90		10	10.5 18 17.5	0.70	100	1497050000	
KWN-M12/10 90		12	13 20 18.5	0.70	100	1497070000	
KWN-M5/16 90	16	5	5.5 8.5 5.3 12 13 12	1.07	100	1497080000	
KWN-M6/16 90		6	6.4 12 14.3	1.15	100	1497090000	
KWN-M8/16 90		8	8.4 15 16.3	1.20	100	1497100000	
KWN-M10/16 90		10	10.5 18 18.3	1.23	100	1497110000	
KWN-M12/16 90		12	13 20 19.3	1.23	100	1497120000	
KWN-M6/25 90	25	6	7 10 6.4 15 15.5 14	1.35	100	1495850000	
KWN-M8/25 90		8	8.4 16 17.5	1.43	100	1495870000	
KWN-M10/25 90		10	10.5 18 19.5	1.57	100	1495880000	
KWN-M12/25 90		12	13 20 20.5	1.51	100	1495890000	
KWN-M14/25 90		14	15 22 22.5	1.69	100	1495900000	
KWN-M6/35 90	35	6	8.5 12 6.4 17 16.5 16	2.10	100	1495910000	
KWN-M8/35 90		8	8.4 17 18.5	2.31	100	1495920000	
KWN-M10/35 90		10	10.5 20 20.5	2.36	100	1495930000	
KWN-M12/35 90		12	13 22 21.5	2.37	100	1495940000	
KWN-M14/35 90		14	15 23 23.5	2.48	100	1494640000	
KWN-M16/35 90		16	17 28 24.5	2.48	100	1494690000	

\* UL not tested

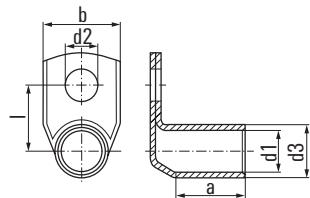

**Tubular cable lugs with 90° angle,  
50 – 300 mm<sup>2</sup>, euro-series**

**Technical data**


Material: Cu according to DIN EN 13600  
Surface: tin plated  
Approvals:



**Ordering data**

Type	Cross-section mm <sup>2</sup>	flat hole M	dimensions in mm				weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation			
KWN-M6/50 90	50	6	10	14	6.4	20	17.5	18	3.00	100	1495950000	PZPK 6/7/0	APG 88
KWN-M8/50 90		8			8.4	20	19.5		3.22	100	1495970000		
KWN-M10/50 90		10			10.5	20	21.5		3.32	100	1495980000		
KWN-M12/50 90		12			13	23	22.5		3.28	100	1495990000		
KWN-M14/50 90		14			15	23	24.5		3.37	100	1494650000		
KWN-M16/50 90		16			17	27	28.5		3.63	100	1496000000		
KWN-M20/50 90		20			21	30	32.5		3.89	100	1494710000		
KWN-M6/70 90	70	6	12	16.5	6.4	24	18.8	20	4.41	25	1496010000		
KWN-M8/70 90		8			8.4	24	20.8		4.86	25	1496020000		
KWN-M10/70 90		10			10.5	24	22.8		5.06	25	1496030000		
KWN-M12/70 90		12			13	24	23.8		4.94	25	1496040000		
KWN-M14/70 90		14			15	25	25.8		5.19	25	1494660000		
KWN-M16/70 90		16			17	28	26.8		5.11	25	1496050000		
KWN-M20/70 90		20			21	29	30.8		5.26	25	1496070000		
KWN-M8/95 90	95	8	13.5	18	8.4	26	21.5	22	5.33	25	1496080000		
KWN-M10/95 90		10			10.5	26	23.5		5.59	25	1496090000		
KWN-M12/95 90		12			13	26	24.5		5.66	25	1496100000		
KWN-M14/95 90		14			15	26	26.5		5.89	25	1494670000		
KWN-M16/95 90		16			17	28	27.5		6.00	25	1496110000		
KWN-M8/120 90	120	8	15	20	8.4	29	22.5	25	7.63	25	1494680000		
KWN-M10/120 90		10			10.5	29	24.5		8.07	25	1494450000		
KWN-M12/120 90		12			13	29	25.5		7.99	25	1494470000		
KWN-M16/120 90		16			17	30	28.5		8.46	25	1494480000		
KWN-M8/150 90	150	8	16.8	21.3	8.4	31	25.7	28	8.03	25	1494490000		
KWN-M10/150 90		10			10.5	31	25.7		8.07	25	1494500000		
KWN-M12/150 90		12			13	31	26.7		8.29	25	1494510000		
KWN-M16/150 90		16			17	31	29.7		8.50	25	1494520000		
KWN-M20/150 90		20			21	35	33.7		8.89	25	1494530000		
KWN-M10/185 90	185	10	19	24	10.5	35	27	29	11.41	25	1494540000		
KWN-M12/185 90		12			13	35	28		12.04	25	1494550000		
KWN-M16/185 90		16			17	35	31		12.48	25	1494570000		
KWN-M20/185 90		20			21	35	35		12.70	25	1494580000		
KWN-M10/240 90	240	10	21	26	10.5	38	28	34	13.32	25	1494590000		
KWN-M12/240 90		12			13	38	29		13.40	25	1494610000		
KWN-M16/240 90		16			17	38	32		13.76	25	1494620000		
KWN-M20/240 90		20			21	38	36		14.23	25	1494630000		
KWN-M12/300 90	300	12	24	30	13	43	31	41	19.92	20	1497300000		
KWN-M16/300 90		16			17	43	34		20.90	20	1497310000		
KWN-M20/300 90		20			21	43	38		21.81	20	1497320000		

**Tubular cable lugs with 45° angle,  
10 – 240 mm<sup>2</sup>, euro-series**



## Technical data


Material: Cu according to DIN EN 13600  
Surface: tin plated  
Approvals:



## Ordering data

Type	Cross-section mm <sup>2</sup>	flat hole M	d1	d3	d2	b	a	weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
KWN-M5/10 45	10	5	4.5	7	5.3	12	9	0.55	100	1496810000	PZPK 6/70
KWN-M6/10 45			6		6.4	12		0.58	100	1496820000	
KWN-M8/10 45			8		8.4	15		0.65	100	1496830000	
KWN-M10/10 45			10		10.5	18		0.66	100	1496840000*	
KWN-M5/16 45	16	5	5.5	8.5	5.3	12	12	0.95	100	1496850000	PZPK 10/120
KWN-M6/16 45		6			6.4	12		1.02	100	1496870000	
KWN-M8/16 45		8			8.4	15		1.17	100	1496880000	
KWN-M10/16 45		10			10.5	18		1.17	100	1496890000	
KWN-M6/25 45	25	6	7	10	6.4	15	14	1.39	100	1496180000	
KWN-M8/25 45		8			8.4	16		1.51	100	1496190000	
KWN-M10/25 45		10			10.5	18		1.66	100	1496200000	
KWN-M12/25 45		12			13	20		1.70	100	1496210000	
KWN-M6/35 45	35	6	8.5	12	6.4	17	16	2.17	50	1496220000	
KWN-M8/35 45		8			8.4	17		2.23	50	1496230000	
KWN-M10/35 45		10			10.5	20		2.34	50	1496240000	
KWN-M12/35 45		12			13	22		2.40	50	1496250000	
KWN-M6/50 45	50	6	10	14	6.4	20	18	2.94	50	1496270000*	
KWN-M8/50 45		8			8.4	20		3.34	50	1496280000	
KWN-M10/50 45		10			10.5	20		3.65	50	1496290000	
KWN-M12/50 45		12			13	23		3.65	50	1496300000	
KWN-M8/70 45	70	8	12	16.5	8.4	24	20	4.90	25	1496310000	
KWN-M10/70 45		10			10.5	24		5.23	25	1496320000	
KWN-M12/70 45		12			13	24		5.34	25	1496330000	
KWN-M8/95 45	95	8	13.5	18	8.4	26	22	6.18	25	1496340000	
KWN-M10/95 45		10			10.5	26		6.20	25	1496350000	
KWN-M12/95 45		12			13	26		6.20	25	1496370000	
KWN-M16/95 45		16			17	28		6.80	25	1496380000*	
KWN-M8/120 45	120	8	15	20	8.4	29	25	7.80	25	1496390000	
KWN-M10/120 45		10			10.5	29		8.90	25	1496400000	
KWN-M12/120 45		12			13	29		8.91	25	1496410000	
KWN-M16/120 45		16			17	30		9.31	25	1496420000	
KWN-M8/150 45	150	8	16.8	21.3	8.4	31	28	11.31	25	1496430000*	
KWN-M10/150 45		10			10.5	31		9.80	25	1496440000	
KWN-M12/150 45		12			13	31		9.68	25	1496450000	
KWN-M16/150 45		16			17	31		10.12	25	1496470000	
KWN-M20/150 45		20			21	35		10.12	25	1496480000*	
KWN-M10/185 45	185	10	19	24	10.5	35	29	12.35	20	1495340000	
KWN-M12/185 45		12			13	35		12.24	20	1495350000	
KWN-M16/185 45		16			17	35		12.84	20	1495370000	
KWN-M20/185 45		20			21	35		13.99	20	1495380000	
KWN-M12/240 45	240	12	21	26	13	38	34	15.46	15	1495400000	
KWN-M16/240 45		16			17	38		16.51	15	1495410000	
KWN-M20/240 45		20			21	38		17.04	15	1495420000	

\* UL not tested

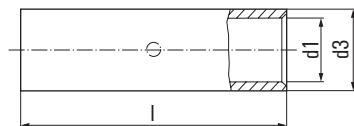**Joint connector 0.5 – 240 mm<sup>2</sup>****euro-series****Technical data**


Material: Cu according to DIN EN 13600  
Surface: tin plated  
Type: with wirestop

**Ordering data**

Type	Cross-section mm <sup>2</sup>	dimensions in mm			weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
VSTN-M0,5/0,75	0.5 - 0.75	d1	d3	I		100	1497330000	HFN 21
VSTN-M1/-1,5	1.0 - 1.5	1.9	3.9	15	0.12	100	1497340000	
VSTN/-2,5	2.5	2.4	4.4	16	0.15	100	1497350000	
VSTN/-4	4	3	5	19	0.21	100	1497370000	
VSTN/-6	6	3.5	6.5	25	0.51	100	1494720000	
VSTN/-10	10	4.5	7	30	0.60	50	1497130000	
VSTN/-16	16	5.5	8.5	35	1.00	50	1497140000	
VSTN/-25	25	7	10	40	1.41	50	1494730000	
VSTN/-35	35	8.5	12	45	2.16	50	1494740000	
VSTN/-50	50	10	14	50	3.32	50	1494750000	
VSTN/-70	70	12	16.5	55	4.91	50	1494760000	
VSTN/-95	95	13.5	18	60	6.09	50	1494770000	
VSTN/-120	120	15	20	65	7.88	25	1494780000	
VSTN/-150	150	16.8	21.3	70	8.68	25	1497380000	
VSTN/-185	185	19	24	75	11.63	25	1497390000	
VSTN/-240	240	21	26	85	14.22	25	1497400000	

## Crimp cable lugs, copper DIN 46235



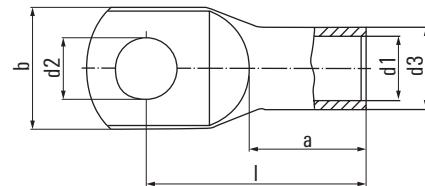

## Crimp cable lugs, copper 6 – 95 mm<sup>2</sup>, DIN 46235


### Technical data

Material: Cu according to DIN EN 13600  
Surface: tin plated

### Ordering data

Type	Cross-section mm <sup>2</sup>	flat hole M	die code	d1	dimensions in mm	b	l	a	weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
KP-M5/-6	6	5	5	3.7	5.5	5.3	8.5	24	10	0.31	100	1497840000
KP-M6/-6			6			6.4	9	24		0.34	100	1497850000
KP-M8/-6			8*			8.4	13	26		0.35	100	1497860000
KP-M5/-10	10	5	6	4.4	6	5.3	10	27	10	0.35	100	1497870000
KP-M6/-10			6			6.4	10	27		0.37	100	1497880000
KP-M8/-10			8*			8.4	13	28		0.38	100	1497890000
KP-M10/-10			10*			10.5	15	29		0.38	100	1497910000
KP-M5/-16	16	5*	8	5.5	8.5	5.3	13	36	20	1.22	100	1497920000
KP-M6/-16			6			6.4	13	36		1.27	100	1497930000
KP-M8/-16			8			8.4	13	37		1.30	100	1497940000
KP-M10/-16			10			10.5	16.5	38		1.32	100	1497950000
KP-M12/-16			12*			13	19	40		1.35	100	1497960000
KP-M6/-25	25	6	10	7	10	6.4	14	39	20	1.62	100	1497970000
KP-M8/-25			8			8.4	17	39		1.73	100	1497980000
KP-M10/-25			10			10.5	17	40.5		1.77	100	1497990000
KP-M12/-25			12			13	18	40.5		1.72	100	1498000000
KP-M16/-25			16*			17	22	45		1.99	100	1498010000
KP-M6/-35	35	6*	12	8.2	12.5	6.4	17.5	42.5	20	3.12	100	1498020000
KP-M8/-35			8			8.4	18	42		3.19	100	1498030000
KP-M10/-35			10			10.5	20	42.5		3.17	100	1498040000
KP-M12/-35			12			13	21	44		3.11	100	1498050000
KP-M16/-35			16*			17	28	47		3.14	100	1498060000
KP-M6/-50	50	6*	14	9.8	14.5	6.4	20	52	28	4.67	100	1498510000
KP-M8/-50			8			8.4	20	52		5.00	100	1498070000
KP-M10/-50			10			10.5	22	52		4.94	100	1498080000
KP-M12/-50			12			13	23	52		4.91	100	1498090000
KP-M14/-50			14*			15	26	53.5		4.94	100	1498570000
KP-M16/-50			16			17	28	55.5		5.04	100	1498110000
KP-M20/-50			20*			21	30	61.5		5.56	100	1498120000
KP-M8/-70	70	8	16	11.3	16.5	8.4	24	56	28	6.54	50	1498130000
KP-M10/-70			10			10.5	24	56		6.54	50	1498140000
KP-M12/-70			12			13	24	56.5		6.57	50	1498150000
KP-M14/-70			14*			15	24	55.5		6.00	50	1498560000
KP-M16/-70			16			17	29	57		6.92	50	1498160000
KP-M20/-70			20*			21	31	61		6.99	50	1498170000
KP-M8/-95	95	8*	18	13.5	19	8.4	28	65	35	9.36	50	1498180000
KP-M10/-95			10			10.5	28	65.5		9.55	50	1498190000
KP-M12/-95			12			13	28	65.5		9.45	50	1498210000
KP-M14/-95			14*			15	28	65.5		9.43	50	1498520000
KP-M16/-95			16			17	30	65.5		9.44	50	1498220000
KP-M20/-95			20*			21	33	71		9.86	50	1498230000

\* not standardized, tube measurements in accordance with DIN 46235

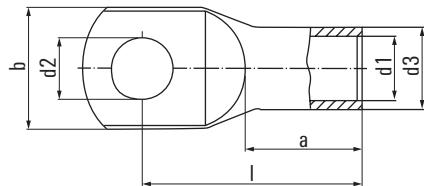

### Crimp cable lugs, copper, 120 – 300 mm<sup>2</sup>, DIN 46235


#### Technical data

Material: Cu according to DIN EN 13600  
Surface: tin plated

#### Ordering data

Type	Cross-section mm <sup>2</sup>	flat hole M	die code	d1	d3	d2	b	I	a	weight 100 pcs./kg	Qty.	Order No.	Tool recommendation
KP-M8/-120	120	8*	20	15.5	21	8.4	31	70	35	11.35	50	1498480000	PZPK 10/120
KP-M10/-120		10				10.5	31	70		11.40	50	1498240000	ERG 45
KP-M12/-120		12				13	31	70.5		11.43	50	1498250000	
KP-M14/-120		14*				15	31	70		11.41	50	1498490000	
KP-M16/-120		16				17	31.5	70		11.36	50	1498270000	
KP-M20/-120		20				21	36	72		11.51	50	1498280000	
KP-M8/-150	150	8*	22	17	23.5	8.4	34	79	35	16.40	25	1498290000	
KP-M10/-150		10				10.5	34	79		16.46	25	1498310000	
KP-M12/-150		12				13	34	78.5		16.53	25	1498320000	
KP-M14/-150		14*				15	34	78		16.49	25	1498580000	
KP-M16/-150		16				17	34	78		16.35	25	1498330000	
KP-M20/-150		20				21	38	78		16.34	25	1498340000	
KP-M8/-185	185	8*	25	19	25.5	8.4	37	83	40	18.50	25	1498540000	
KP-M10/-185		10				10.5	37	83		18.50	25	1498350000	
KP-M12/-185		12				13	37	82.5		18.95	25	1498360000	
KP-M14/-185		14*				15	37	82		18.96	25	1498590000	
KP-M16/-185		16				17	37	82		19.41	25	1498370000	
KP-M20/-185		20				21	40	83		19.01	25	1498380000	
KP-M10/-240	240	10*	28	21.5	29	10.5	42	92	40	27.10	20	1498390000	
KP-M12/-240		12				13	42.5	92		26.65	20	1498410000	
KP-M14/-240		14*				15	42.5	92		26.73	20	1498530000	
KP-M16/-240		16				17	42.5	92		27.45	20	1498420000	
KP-M20/-240		20				21	45	92		27.67	20	1498430000	
KP-M10/-300	300	10*	32	24.5	32	10.5	48.5	104	50	34.80	10	1498440000	
KP-M12/-300		12*				13	48.5	104		34.50	10	1498450000	
KP-M14/-300		14*				15	48.5	104		34.60	10	1498550000	
KP-M16/-300		16				17	48.5	100		34.16	10	1498460000	
KP-M20/-300		20				21	48.5	100		34.46	10	1498470000	

\* not standardized, tube measurements in accordance with DIN 46235

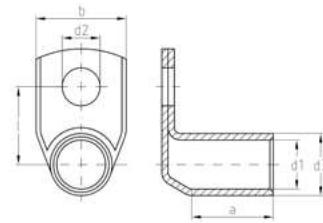

**Crimp cable lugs, copper with 90° angle,  
10 – 300 mm<sup>2</sup>, DIN 46235**


**Technical data**

Material: Cu according to DIN EN 13600  
Surface: tin plated

**Ordering data**

Type	Cross-section mm <sup>2</sup>	flat hole M	die code	d1	dimensions in mm d3 d2 b l a	weight 100 pcs./kg (pcs.)	Qty.	Order No.	Tool recommendation	Arg 80
KWPN-M6/-10 90	10	6	4.4	6	6.4 10 13 9	0.35	100	1497420000	PZPK 6/770	EPG 60 + HPG 60
KWPN-M8/-10 90		8			8.4 13 15	0.37	100	1497430000		
KWPN-M6/-16 90	16	6	8 5.5	8.5	6.4 13 14.3 20	1.29	100	1497440000		
KWPN-M8/-16 90		8			8.4 13 16.3	1.3	100	1497450000		
KWPN-M10/-16 90	10				10.5 16.5 18.3	1.14	100	1497470000		
KWPN-M12/-16 90	12				13 19 19.3	1.17	100	1497480000		
KWPN-M6/-25 90	25	6	10 7	10	6.4 15 15.5 20	1.68	100	1497490000		
KWPN-M8/-25 90		8			8.4 16 17.5	1.78	100	1497510000		
KWPN-M10/-25	10				10.5 16 19.5	1.84	100	1497520000		
KWPN-M12/-25 90	12				13 19 20.5	1.82	100	1497530000		
KWPN-M6/-35 90	35	6	12 8.2	12.5	6.4 17 16.8 20	2.74	100	1497540000		
KWPN-M8/-35 90		8			8.4 17 18.8	3.04	100	1497550000		
KWPN-M10/-35 90	10				10.5 19 20.8	3.12	100	1497570000		
KWPN-M12/-35 90	12				13 21 21.8	3.26	100	1497580000		
KWPN-M8/-50 90	50	8	14 9.8	14.5	8.4 20 19.8 28	4.62	100	1497590000		
KWPN-M10/-50 90		10			10.5 22 21.8	4.82	100	1497610000		
KWPN-M12/-50 90	12				13 24 22.8	5.03	100	1497620000		
KWPN-M16/-50 90	16				17 27 25.8	5.06	100	1497630000		
KWPN-M8/-70 90	70	8	16 11.3	16.5	8.4 24 20.8 28	5.93	25	1497640000		
KWPN-M10/-70 90		10			10.5 24 22.8	6.51	25	1497650000		
KWPN-M12/-70 90	12				13 24 23.8	7	25	1497660000		
KWPN-M16/-70 90	16				17 29 26.8	6.96	25	1497680000		
KWPN-M8/-95 90	95	8	18 13.5	19	8.4 28 22 35	8.5	25	1497690000		
KWPN-M10/-95 90		10			10.5 28 24	9.37	25	1497710000		
KWPN-M12/-95 90	12				13 28 25	9.49	25	1497720000		
KWPN-M16/-95 90	16				17 32 28	9.67	25	1497730000		
KWPN-M10/-120 90	120	10	20 15.5	21	10.5 32 25.5 35	10.84	25	1497750000		
KWPN-M12/-120 90		12			13 32 26.5	11	25	1497760000		
KWPN-M16/-120 90	16				17 32 29.5	11.16	25	1497770000		
KWPN-M20/-120 90	20				21 38 33.5	12.39	25	1497780000		
KWPN-M8/-150 90	150	8	22 17	23.5	8.4 34 26.8 35	13.87	25	1497790000		
KWPN-M10/-150 90		10			10.5 34 26.8	14.16	25	1497810000		
KWPN-M12/-150 90	12				13 34 27.8	14.41	25	1497820000		
KWPN-M16/-150 90	16				17 34 30.8	14.83	25	1497830000		
KWPN-M20/-150 90	20				21 34 34.8	15.51	25	1496680000		
KWPN-M8/-185 90	185	8	25 19	25.5	8.4 37 25.8 40	15.7	25	1496800000		
KWPN-M10/-185 90		10			10.5 37 27.8	16.81	25	1496690000		
KWPN-M12/-185 90	12				13 37 28.8	17.29	25	1496700000		
KWPN-M16/-185 90	16				17 37 31.8	18.09	25	1496710000		
KWPN-M20/-185 90	20				21 40 35.8	20.2	25	1496720000		
KWPN-M12/-240 90	240	12	28 21.5	29	13 42 30.5 40	22.61	20	1496730000		
KWPN-M16/-240 90		16			17 42 33.5	24.64	20	1496740000		
KWPN-M20/-240 90	20				21 42 37.5	25.59	20	1496750000		
KWPN-M12/-300 90	300	12	32 24.5	32	13 48.5 32 50	29.35	10	1496770000		
KWPN-M16/-300 90		16			17 48.5 35	30.51	10	1496780000		
KWPN-M20/-300 90	20				21 48.5 39	38.6	10	1496790000		

**Tubular compression connectors  
6 – 300 mm<sup>2</sup>, DIN 46267 part 1,  
strain relieved**

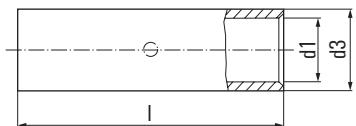

## Technical data

Material: Cu according to DIN EN 13600  
Surface: tin plated

## Ordering data


Type	Cross-section mm <sup>2</sup>	die code	dimensions in mm			weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
VPN-6	6	5	d1 3.7	d3 5.5	l 30	0.35	100	1498610000	PZPK 6/70
VPN-10	10	6	4.4	6	30	0.35	100	1498620000	CTN 25 D5
VPN-16	16	8	5.5	8.5	50	1.51	100	1498630000	PZPK 10/120
VPN-25	25	10	7	10	50	1.86	100	1498640000	EP 36 G + HPG 60
VPN-35	35	12	8.2	12.5	50	3.20	100	1498650000	APG 80
VPN-50	50	14	9.8	14.5	56	4.64	50	1498660000	
VPN-70	70	16	11.3	16.5	56	5.64	50	1498670000	
VPN-95	95	18	13.5	19	70	8.98	50	1498680000	
VPN-120	120	20	15.5	21	70	10.27	25	1498690000	
VPN-150	150	22	17	23.5	80	14.96	25	1498710000	
VPN-185	185	25	19	25.5	85	16.78	25	1498720000	
VPN-240	240	28	21.5	29	90	23.20	15	1498730000	
VPN-300	300	32	24.5	32	100	30.52	10	1498740000	



## Terminals noninsulated

K

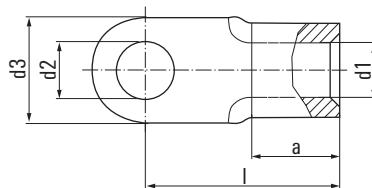

Terminals 0.1 - 6 mm<sup>2</sup>,

## DIN 46234


## Technical data

Material: Cu-HCP  
Surface: tin plated  
S = small palm

## Ordering data


Type	Cross-section mm <sup>2</sup>	flat hole M	d1	dimensions in mm			weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
KQN-M2/-0,5	0.1 - 0.5	2	1	2.2	5	10	0.02	100	1493670000	HTN 21
KQN-M3/-0,5		3		3.2	5	10	0.02	100	1493680000	
KQN-M4/-0,5		4		4.3	6.5	12	0.03	100	1493690000	
KQN-M5/-0,5		5		5.3	8	11	0.03	100	1493700000	
KQN-M2/-1	0.5 - 1	2*	1.6	2.2	6	11	0.06	100	1493720000	
KQN-M2,5/-1		2.5		2.7	6	11	0.06	100	1493730000	
KQN-M3/-1		3		3.2	6	11	0.06	100	1493740000	
KQN-M3,5/-1		3.5		3.7	6	11	0.06	100	1493750000	
KQN-M4/S/-1		4/S*		4.3	7	11	0.06	100	1493760000	
KQN-M4/-1		4		4.3	8	12	0.07	100	1493770000	
KQN-M5/S/-1		5/S*		5.3	8	12	0.06	100	1493780000	EPG 45
KQN-M5/-1		5		5.3	10	13	0.08	100	1493790000	
KQN-M6/-1		6*		6.5	10	13	0.07	100	1493800000	
KQN-M8/-1		8*		8.4	12	17	0.10	100	1493810000	
KQN-M10/-1		10*		10.5	14	17	0.10	100	1493710000	
KQN-M3/-2,5	1.5 - 2.5	3	2.3	3.2	6	11	0.07	100	1493820000	
KQN-M3,5/-2,5		3.5		3.7	6	11	0.06	100	1493830000	
KQN-M4/S/-2,5		4/S*		4.3	6.8	11	0.06	100	1493840000	
KQN-M4/-2,5		4		4.3	8	12	0.08	100	1493850000	
KQN-M5/S/-2,5		5/S*		5.3	8	12	0.07	100	1493870000	
KQN-M5/-2,5		5		5.3	10	14	0.10	100	1493890000	
KQN-M6/-2,5		6		6.5	11	16	0.11	100	1493900000	
KQN-M8/-2,5		8		8.4	14	17	0.14	100	1493910000	
KQN-M10/-2,5		10*		10.5	18	20	0.19	100	1493930000	
KQN-M12/-2,5		12*		13	18	20	0.16	100	1493940000	
KQN-M4/-6	4 - 6	4	3.6	4.3	8	14	0.14	100	1493950000	APG 80 EPG 60 + MPG 60
KQN-M5/-6		5		5.3	10	15	0.16	100	1493960000	
KQN-M6/-6		6		6.5	11	16	0.17	100	1493970000	
KQN-M8/-6		8		8.4	14	19	0.21	100	1493980000	
KQN-M10/-6		10		10.5	18	21	0.27	100	1493990000	
KQN-M12/-6		12*		13	18	21	0.23	100	1494000000	

\* not standardized, dimensions similar to DIN 46234

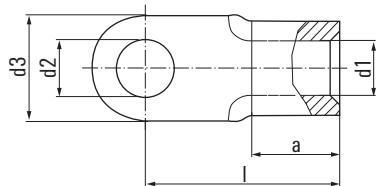**Terminals 10 - 240 mm<sup>2</sup>,  
DIN 46234**
**Technical data**
 Material: Cu-HCP  
 Surface: tin plated
**Ordering data**

Type	Cross-section mm <sup>2</sup>	flat hole M	d1	d2	d3	l	a	weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
KQN-M4/-10	10	4*	4.5	4.3	10	16	8	0.23	100	1494010000	APG 80
KQN-M5/-10		5		5.3	10	16		0.22	100	1494020000	
KQN-M6/-10		6		6.5	11	17		0.24	100	1494030000	
KQN-M8/-10		8		8.4	14	20		0.29	100	1494040000	
KQN-M10/-10		10		10.5	18	21		0.35	100	1494050000	
KQN-M12/-10		12		13	22	23		0.41	100	1494060000	
KQN-M5/-16	16	5	5.8	5.3	11	20	10	0.40	100	1494070000	
KQN-M6/-16		6		6.5	11	20		0.38	100	1494080000	
KQN-M8/-16		8		8.4	14	22		0.42	100	1494090000	
KQN-M10/-16		10		10.5	18	24		0.50	100	1494100000	
KQN-M12/-16		12		13	22	26		0.58	100	1494110000	
KQN-M5/-25	25	5	7.5	5.3	12	25	11	0.70	50	1494120000	
KQN-M6/-25		6		6.5	12	25		0.71	50	1494130000	
KQN-M8/-25		8		8.4	16	25		0.76	50	1494140000	
KQN-M10/-25		10		10.5	18	26		0.78	50	1494150000	
KQN-M12/-25		12		13	22	31		0.97	50	1494160000	
KQN-M16/-25		16		17	28	35		1.20	50	1493490000	
KQN-M6/-35	35	6	9	6.5	15	26	12	0.97	50	1494170000	
KQN-M8/-35		8		8.4	16	26		0.96	50	1494180000	
KQN-M10/-35		10		10.5	18	27		1.00	50	1494190000	
KQN-M12/-35		12		13	22	31		1.17	50	1493130000	
KQN-M16/-35		16		17	28	36		1.41	50	1493140000	
KQN-M20/-35		20*		21	30	37.5	14	1.67	50	1493520000	
KQN-M6/-50	50	6	11	6.5	18	34	16	1.75	50	1493510000	
KQN-M8/-50		8		8.4	18	34		1.72	50	1493150000	
KQN-M10/-50		10		10.5	18	34		1.66	50	1493160000	
KQN-M12/-50		12		13	22	36		1.80	50	1493170000	
KQN-M16/-50		16		17	28	40		2.11	50	1493180000	
KQN-M20/-50		20*		21	32	41.2	18	2.57	50	1493530000	
KQN-M6/-70	70	6	13	6.5	22	38	18	2.66	50	1493190000	
KQN-M8/-70		8		8.4	22	38		2.34	50	1493210000	
KQN-M10/-70		10		10.5	22	38		2.58	50	1493220000	
KQN-M12/-70		12		13	22	38		2.49	50	1493230000	
KQN-M16/-70		16		17	28	42		2.77	50	1493240000	
KQN-M20/-70		20*		21	32	45	19	3.06	50	1493250000	
KQN-M8/-95	95	8	15	8.4	24	42	20	4.24	25	1493260000	
KQN-M10/-95		10		10.5	24	42		4.17	25	1493270000	
KQN-M12/-95		12		13	24	42		3.92	25	1493280000	
KQN-M16/-95		16		17	28	44		3.94	25	1493290000	
KQN-M20/-95		20*		21	32	51.8		4.25	25	1493310000	
KQN-M8/-120	120	8	16.5	8.4	24	44	22	5.77	25	1493320000	
KQN-M10/-120		10		10.5	24	44		5.67	25	1493330000	
KQN-M12/-120		12		13	24	44		5.42	25	1493340000	
KQN-M16/-120		16		17	28	48		6.21	25	1493350000	
KQN-M20/-120		20*		21	32	53	21	5.81	25	1493360000	
KQN-M10/-150	150	10	19	10.5	30	50	24	8.29	25	1493370000	
KQN-M12/-150		12		13	30	50		8.31	25	1493380000	
KQN-M16/-150		16		17	30	50		8.01	25	1493390000	
KQN-M20/-150		20*		21	36	63	27	7.35	25	1493410000	
KQN-M10/-185	185	10	21	10.5	36	50	28	11.16	25	1493420000	
KQN-M12/-185		12		13	36	50		10.78	25	1493430000	
KQN-M16/-185		16		17	36	50		10.61	25	1493440000	
KQN-M20/-185		20*		21	36	50		10.17	25	1493450000	
KQN-M10/-240	240	10	23.5	10.5	38	56	32	15.01	25	1493460000	
KQN-M12/-240		12		13	38	56		14.98	25	1493470000	
KQN-M16/-240		16		17	38	56		14.53	25	1493480000	

\* not standardized

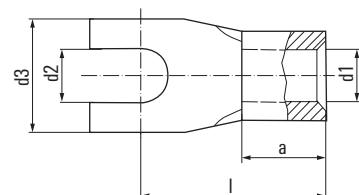

## Terminals

### fork-type 0.5 – 16 mm<sup>2</sup>

#### Technical data


Material: Cu-HCP (0.5 – 10 mm<sup>2</sup>)  
Cu-ETP (16 mm<sup>2</sup>)  
Surface: tin plated  
S = small palm

#### Ordering data

Type	Cross-section mm <sup>2</sup>	flat hole M	d1	dimensions in mm			weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
KQNG-M3/-1	0.5 - 1	C 3	1.6	3.2	6	11	5	100	1493540000	HTN 21
KQNG-M3,5/-1		C 3,5		3.7	6	11		100	1493550000	
KQNG-M4/S/-1		C 4/S		4.3	7	12		100	1493560000	
KQNG-M4/-1		C 4		4.3	8	12		100	1493570000	
KQNG-M5/-1		C 5		5.3	10	13		100	1493580000	
KQNG-M6/-1		C 6		6.5	12	17		100	1493590000	
KQNG-M3/-2,5	1.5 - 2.5	C 3	2.3	3.2	6	11	5	100	1493600000	
KQNG-M3,5/-2,5		C 3,5		3.7	6.8	11		100	1493610000	
KQNG-M4/S/-2,5		C 4/S		4.3	6.8	11		100	1493620000	
KQNG-M4/-2,5		C 4		4.3	8	12		100	1493630000	
KQNG-M5/-2,5		C 5		5.3	10	14		100	1493640000	
KQNG-M6/-2,5		C 6		6.5	11	16		100	1493650000	
KQNG-M4/-6	4 - 6	C 4	3.6	4.3	8	14	6	100	1493660000	
KQNG-M5/-6		C 5		5.3	10	15		100	1492650000	
KQNG-M6/-6		C 6		6.5	11	16		100	1492660000	
KQNG-M8/-6		C 8		8.4	14	19		100	1492670000	
KQNG-M5/-10	10	C 5	4.5	5.3	10	16	8	100	1492680000	
KQNG-M6/-10		C 6		6.5	11	17		100	1492690000	
KQNG-M6/-16	16	C 6	5.8	6.5	11	20	10	50	1492700000	
KQNG-M8/-16		C 8		8.4	14	22		50	1492710000	

**Pin cable lugs 0.1 – 95 mm<sup>2</sup>,  
DIN 46230**
**Technical data**

Material: Cu-HCP (0.1 – 6 mm<sup>2</sup>)  
Cu-ETP (10 – 95 mm<sup>2</sup>)  
Surface: tin plated

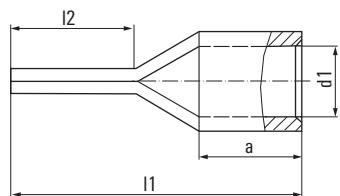**Ordering data**


Type	Cross-section mm <sup>2</sup>	dimensions in mm				Ø pin	weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
KSN/0,1-0,5	0.1 - 0.5	d1	I1	I2	a	1.2	0.02	100	1492720000	HTN 21
KSN/0,5-1,0	0.5 - 1	1.6	17	10	5	1.9	0.06	100	1492730000	
KSN/1,5-2,5	1.5 - 2.5	2.3	17	10	5	1.9	0.07	100	1492740000	
KSN/2,5			22	15			0.09	100	1492750000*	
KSN/6,0	4 - 6	3.6	20	11	6	2.6	0.15	100	1492770000	
KSN/10	10	4.5	22	12	8	2.3 x 4.2	0.25	100	1492780000	
KSN/16	16	5.8	26	13	10	2.5 x 5.6	0.41	100	1492790000	
KSN/25	25	7	34.1	16	14	2.5 x 6.9	0.66	50	1492800000*	
KSN/35	35	8.4	41	20	16	3.2 x 8.1	1.19	50	1492810000*	
KSN/50	50	9.5	45.7	21	19	3.7 x 9.5	1.88	50	1492820000*	
KSN/70	70	11.2	55	24	24	4 x 11	3.01	50	1492830000*	
KSN/95	95	13.5	55.5	22	24	5.1 x 12.3	4.2	25	1492840000*	

\* not standardized

APG 80 + EPG 60 + HPG 60

EPG 45

CTN 25 D4

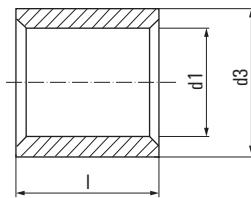

**Parallel connectors 0.1 – 150 mm<sup>2</sup>, form A, DIN 46341 part 1**

**Technical data**

Material: Cu-HCP  
Surface: tin plated

**Ordering data**

Type	Cross-section mm <sup>2</sup>	dimensions in mm			weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
VPLN/0,1-0,5	0.1 - 0.5*	5	1.2	2	0.01	100	1492850000	HTN 21
VPLN/0,5-1,0	0.5 - 1	7	1.6	3.3	0.04	100	1492860000	EPG 45
VPLN/1,5-2,5	1.5 - 2.5	7	2.3	4	0.05	100	1492870000	CTN 25 D4
VPLN/4-6,0	4 - 6	7	3.6	5.7	0.09	100	1492880000	APG 80 + EPG 60 + HPG 60
VPLN/10	10	9	4.6	6.8	0.15	100	1492890000	
VPLN/16	16	10	5.9	8.3	0.23	100	1492900000	
VPLN/25	25	12.5	7.7	10.7	0.45	100	1492910000	
VPLN/35	35	14	9.2	12.4	0.65	100	1492920000	
VPLN/50	50	17.5	11.2	14.8	1.13	100	1492930000	
VPLN/70	70	18	13.5	17.5	1.59	100	1492940000	
VPLN/95	95	19	15	20	2.34	50	1492950000	
VPLN/120	120	21	16.7	22.7	3.53	50	1492960000	
VPLN/150	150	25	19	25.5	5.02	50	1492970000	

\* not standardized

**Joint connector 0.1 – 150 mm<sup>2</sup>, form B, DIN 46341 part 1**

**Technical data**

Material: Cu-HCP  
Surface: tin plated

**Ordering data**

Type	Cross-section mm <sup>2</sup>	dimensions in mm			weight 100 pcs./kg	Qty. (pcs.)	Order No.	Tool recommendation
VSTN/0,1-0,5	0.1 - 0.5*	12	1.2	2	0.02	100	1492980000	HTN 21
VSTN/0,5-1	0.5 - 1	15	1.6	3.3	0.09	100	1492990000	EPG 45
VSTN/1,5-2,5	1.5 - 2.5	15	2.3	4	0.11	100	1493010000	CTN 25 D4
VSTN/4-6	4 - 6	15	3.6	5.7	0.18	100	1493020000	APG 80 + EPG 60 + HPG 60
VSTN/10	10	20	4.6	6.8	0.36	100	1493030000	
VSTN/16	16	26	5.9	8.3	0.61	100	1493040000	
VSTN/25	25	29	7.7	10.7	1.13	100	1493050000	
VSTN/35	35	32	9.2	12.4	1.55	100	1493060000	
VSTN/50	50	38	11.2	14.8	2.44	100	1493070000	
VSTN/70	70	42	13.5	17.5	3.73	50	1493080000	
VSTN/95	95	48	15	20	6.08	50	1493090000	
VSTN/120	120	52	16.7	22.7	8.67	50	1493110000	
VSTN/150	150	56	19	25.5	11.25	50	1493120000	

\* not standardized



# Tools for the end of the day

## Tools for the end of the day

Barbecue set	L.3
Bottle opener	L.4
Corkscrew	L.4

L

## That's how to end the day with Weidmüller

Now it's the end of the day! A cool drink, a barbecue or a glass of wine: how to best enjoy your time after work is up to you.

We supply the right tools, so you can BBQ in style, with our barbecue cutlery, you can flip, twist and grill on all sides. And with our corkscrews and bottle openers, all your drinks will be served on time. That's the way to end the day with Weidmüller.



## Barbecue set

## Barbecue set



## Technical data

Total length

Weight

**Note****SD BBQ SET**

445 mm

339 GRM

## Ordering data

Version

Type	Qty.	Order No.
SD BBQ SET	1	2924480000

**Note**

## Bottle openers

## Bottle opener

## Corkscrew



## Technical data

Total length  
Weight

**Note**

## Ordering data

**Version**

**SD OPEN**

147 mm  
79.3 GRM

**SDQ WINE**

95 mm  
127.6 GRM

**Note**

Type	Qty.	Order No.
SD OPEN	1	2750180000

Type	Qty.	Order No.
SDQ WINE	1	2924490000

# Service and support

---

<b>Service and support</b>	
Service connects – worldwide	V.2
Engineering services and customised products	V.3
easyConnect – Your Industrial Service Platform	V.4
Support Center	V.6
Additional support services	V.7
Weidmüller Configurator: intuitive, uncomplicated & fast digital engineering	V.8
Your digital ordering options at Weidmüller	V.10

---

## Our expertise for your requirements

Service connects – worldwide



Automation technology functions are becoming more complex in a globally-oriented world facing ambitious targets in terms of energy efficiency and smart production. We are your equal partners for the best connections in Industrial Connectivity.

Our personal support answers all questions reliably and expertly. During planning, installation or operation our service and support offer is your best companion.

In short: Weidmüller's global service combines our expertise with your requirements.

V



**Your way to our service**

[www.weidmueller.com/service](http://www.weidmueller.com/service)

# Engineering services and customised products

Automation engineering and connectivity consulting belongs to our services as well as assembly of engineered products. We also support the process from the idea to the product with our Weidmüller Configurator and the Configure-to-Order process.



## **Consulting and engineering**

The challenge for you is reducing costs and increasing efficiency. This requires intelligent, individual solutions. Whether it is modified products, pre-fitted mounting rails or complete small cabinets – our application centres provide a highly qualified custom-made engineering and production service.

## **Connectivity Consulting**

Increase your competitiveness - supported by our experts Our drive is to optimise your competitiveness. That's why our team of experts supports you in significantly increasing your efficiency in electrical machine design and control cabinet construction. With proven products and services from the Weidmüller portfolio – and with the experience gained from over 300 projects worldwide.

## **Assembled terminal rails - Flexibly designed to suit your requirements**

Your processes in panel building have to be fast, flexible and productive. This is the only way you can cut your costs and increase efficiency. Depending on the application in question, you will have different requirements with respect to the engineering service, delivery speed and flexibility to be provided.



## **Modified and assembled enclosures - Competitive advantages included**

To compete internationally, your plants need to satisfy high standards of safety, quality and performance. The smart combination of consultation, application expertise and industry know-how is our key to finding a custom-fit solution for your application. Reduce costs and increase efficiency.

## **Fast Delivery Service - Your ideas deserve a quick realisation**

Obtain offers 24/7 and within minutes, including directly orderable article numbers with our Fast Delivery Service. The Weidmüller Configurator (WMC) for planning and configuration is key for consistent processes. Dispatch your orders in 5 days. Assemble individual terminal strips and enclosures from batch size 1!

# Your ticket to the world of digital service

## easyConnect – Your Industrial Service Platform



Our cloud-based platform is your ticket to the world of digital services from Weidmüller, and the intuitive and future-proof tool for your way to the Industrial IoT. Realise your use cases easily, consistently and without any relevant prior knowledge, thanks to the perfect interaction of platform, devices and diverse software services.

As an open, modular and perfectly integrable system, the platform is your enabler for a wide range of use cases. Increase your efficiency and unleash your full innovation potential with easyConnect.

V



### Interested in using easyConnect?

Learn how to get started with easyConnect step-by-step.

[www.weidmueller.com/easyconnect](http://www.weidmueller.com/easyconnect)

## Why should you use easyConnect?


- You want to enter your digital transformation step-by-step?
- You want to make the step into Industrial IoT, but have no or little IT expertise?
- You want to use your digital data for smart & scalable services?
- You want to offer digital services (such as customised dashboard) to your customers?
- You want to improve your service offering and efficiency, e.g. through remote access?
- You feel Weidmüller's digital services are interesting, but you have „your cloud“ already?



Weidmüller comes up with the solution: easyConnect, the new digitalisation platform. It bundles Weidmüller's digital services at one place in the cloud and connects them with various Weidmüller devices.

With easyConnect you start digitalising your application step-by-step without ballast in a secure way.

## The following services are initially available on easyConnect:

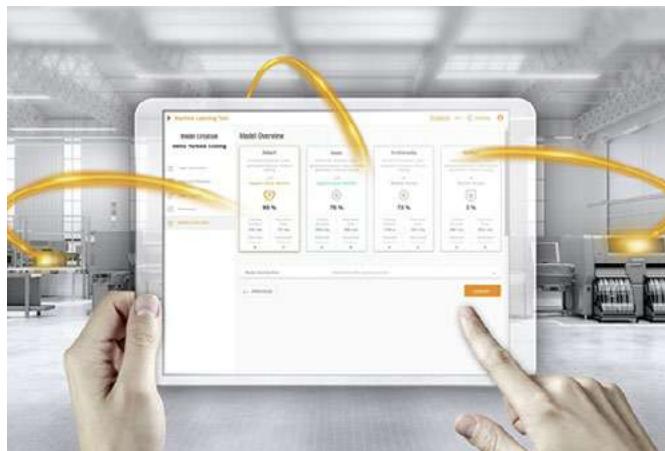

### Device management

Adding and managing cloud-connected devices is typically the first step in any Industrial IoT use case.

### Asset management

The asset management service is a modelling tool that allows users to model their assets and processes and link them to relevant time series data.

### Remote access (u-link)

u-link guarantees a quick and secure access to machines and plants while also allowing for efficient management.

### Data visualisation

easyConnect data visualisation services enable users to view, monitor and display live and historical data.

### AutoML

With Weidmüller Industrial AutoML, you can optimize operations, increase product quality and develop new business models by benefiting from advanced analytics.

## Expand the possibilities of our products

Our Support Center provides you with comprehensive, clear and personal assistance



Receive fast and intuitive support to get the most out of our products in your application. In our new Support Center you can search or navigate to the many application notes, product information, video tutorials or software downloads of our products.

- **Everything at a glance** – One central support hub, where all relevant information is available
- **Powerful search** – Provides filter functions for various types of information and products
- **Different views and navigations** – Content provided in views product information, engineering support or software downloads
- **More than 170,000 downloads** – Application notes, video tutorials, templates and examples, user documentation, engineering data, ...
- **Personal contact** – Direct access to your personal technical contact in your country

V



Explore the world of our new Support Center

[support.weidmueller.com](http://support.weidmueller.com)



# Additional support services



## Training and Webinars

Stay tuned in a world that is accelerating. In our entertaining interactive webinars, we offer you the opportunity to learn about new products and technology topics and to interact with our experts.



## Repairs and replacement parts

We offer repair and components for our Workplace Solutions as well as assistance for other Weidmüller products. Find out how our experts can help you with your repair request.



## Security advisory board

Our Product Security Incident Response Team (PSIRT) continuously informs you about possible security-related vulnerabilities of our products.



## Engineering data

For the quick integration of our products into your design, there are a lot of digital product data for engineering systems like EPLAN, Zuchen E3.series, WSCAD and many others available for download.



## Product change notifications

Technical modifications of our products always available online.



## Technical product catalogues

Technical data for our entire program in Industrial Connectivity for download in PDF-format.

## From the idea to the finished solution

# Weidmüller Configurator: intuitive, uncomplicated & fast digital engineering

Digital engineering can be so easy – with the Weidmüller Configurator!

It's a **free to use** software application to easily configure industrial solutions. It features more than **12,000 articles** from multiple product families including rail-mounted components, industrial and ex-certified enclosures, Heavy Duty Connectors, remote I/O-systems and PCB connectors.

Unleash the full power of digital engineering:

Our application wizards help you choose the right articles.

Place, mark or modify them to your needs and get your solution **visualized in 3D** – what you see is what you get!

Our promise: Speed up your solution planning process by up to 70%!

### Your benefits:

- **Proven configuration designs in real 3D:** The plausibility and collision check with the complete digital documentation ensures that you can rely 100% on your configuration.
- **Seamless E-CAD Roundtrip:** Interfaces enable the simple exchange of product data between the WMC and all common engineering tools, such as Zulen E3 or EPLAN Electric P8.
- **Sample Service & Fast Delivery Service:** to support your design-in process, we offer a **3-day sample service** for many products. Inquire them directly online – for free!

You want your solution right away? Our **Fast Delivery Service** guarantees delivery of individually assembled terminal strips or enclosures within a few days.

### Get started online now!

The Weidmüller Configurator makes solution planning easy. Visit our website for more information, tutorials and download it for free:



[www.weidmueller.com/wmc](http://www.weidmueller.com/wmc)



or register on [easyconnect.weidmueller.com](http://easyconnect.weidmueller.com)  
and use it online.



**Signal wiring:**

Number of signal terminals:

Number of blocks:

Supply terminal:  Yes  No

Signal count per terminal:  1  2

Potential Free:  Yes  No

#### Wizards:

Design complete applications within few clicks – even without detailed product knowledge – for signal wiring, load monitoring, instrument transformers, enclosures, remote I/O-systems and many more.

**Bill of material and markers:**

Part Number	Description
Part 1	Terminal block
Part 2	Terminal block
Part 3	Terminal block
Part 4	Terminal block
Part 5	Terminal block
Part 6	Terminal block
Part 7	Terminal block
Part 8	Terminal block
Part 9	Terminal block
Part 10	Terminal block
Part 11	Terminal block
Part 12	Terminal block
Part 13	Terminal block
Part 14	Terminal block
Part 15	Terminal block
Part 16	Terminal block
Part 17	Terminal block
Part 18	Terminal block
Part 19	Terminal block
Part 20	Terminal block

#### Assistants:

Finalize your solutions with supporting assistants to add cross-connectors, markers or colors and verify the faultlessness. Automatic modes save valuable time!

**1-click documentation:**

#### 1-click documentation:

Get assembly drawings for production – only 1 click. Bill of material – only 1 click. The complete solution documentation including all component data sheets – you're right, only 1 click!

## Digital ordering options

### Your digital ordering options at Weidmüller

Find and easily select the products you need, with convenient ordering: as your Partner in Industrial Connectivity, we know what counts in purchasing. That is why we offer you a variety of options for ordering products from us and optimising your purchasing processes to meet your individual requirements and your workflow. The choice is yours.

#### Order via the Weidmüller eShop

Our eShop offers you access to the complete Weidmüller product range around the clock – directly from a PC, tablet, or smartphone. The intuitive user guidance supports you as you select from over 50,000 products. Technical data, prices, and availabilities are available at any time. The shopping basket with check out function lets you place an order in seconds. Convenient additional functions like CSV upload, order history, reports, or custom order templates make your ordering processes even more efficient.



#### Order via the OCI interface

The Open Catalogue Interface (OCI) facilitates the exchange of data between your enterprise resource planning system and our eShop. This means that our eShop is integrated into your system via an OCI interface, so you have access to our complete product catalogue from your enterprise resource planning system. You can filter and select products, place them in your shopping basket and place direct orders without changing your software application. The open OCI standard is supported worldwide from a variety of software providers.



#### Order via the EDI interface

Our Electronic Data Interchange (EDI) also offers you the option of ordering our products directly from your enterprise resource planning system. All order data is transmitted automatically to our system and processed immediately. Orders, order confirmations, invoices, and delivery notices are transmitted lightning fast. This helps you make your purchasing processes even more efficient.



We will be glad to advise you on which solutions are suitable for you and how implementation is possible.

**Get in touch with us**

[www.weidmueller.com/digital-order](http://www.weidmueller.com/digital-order)

# Index

## Index

Index Type	X.2
Index Order No.	X.8
Addresses worldwide	X.14

Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
<b>1</b>			CRIMP-SET PZ 16	9025850000	H.37	ERME 630 PDT	9013990000	D.43	EPG 60/HPG DIN 25	2505310000	D.39
1/4" HANDGRIFF	4294820000	F.17	CRIMP-SET PZ 3	9028650000	H.35	ERME 66 PDT	9013980000	D.43	ES EPG 60/HPG DIN 35	2505320000	D.39
<b>2</b>			CRIMP-SET PZ 4 D	9028630000	H.35	ERME AM 16	9204260000	C.12	ES EPG 60/HPG DIN 50	2505330000	D.39
2POL TESTER ZUB	2565720000	G.6	CRIMP-SET PZ 50	9028850000	H.37	ERME LSA PLUS SCHERE	9014050000	D.43	ES EPG 60/HPG DIN 70	2505340000	D.39
2POL TESTER ZUB	2565720000	G.7	CRIMP-SET PZ 6 ROTOL	9028680000	H.35	ERME LSA PLUS STANDARD	9014000000	D.43	ES EPG 60/HPG DIN 95	2505350000	D.39
2POL TESTER ZUB	2565720000	G.13	CRIMP-SET PZ 6 ROTOL T	9028700000	H.35	ERME MULTI-STRIPAX	9203070000	C.10	ES EPG 60/HPG DIN 6	2505280000	D.39
<b>4</b>			CRIMP-SET PZ 6/	9028740000	H.35	ERME SPX UL	1471390000	C.5	ES EPG 60/HPG 6 HEX 10	2505180000	D.39
4-FOLD BLADE PS AM 12	2819820000	I.20	CRIMP-SET PZ 6/	9028740000	H.35	ERME SPX UL XL	1512790000	C.5	ES EPG 60/HPG 6 HEX 120	2505230000	D.39
<b>A</b>			CRIMPFIX P 16	9028530000	C.14	ERME VKSV	1251270000	B.10	ES EPG 60/HPG 6 HEX 150	2505240000	D.39
ADAPTER PCV HTO	3064900000	I.21	CRIMPFIX L	9028530000	C.14	ERSATZMESSER AM 25/35	9001530000	C.12	ES EPG 60/HPG 6 HEX 16	2505170000	D.39
ADJUSTABLE SQUARE	2888450000	H.45	CRIMPFIX LS	9025300000	C.14	ERSATZMESSER STRIPAX PL	9050340000	D.8	ES EPG 60/HPG 6 HEX 185	2505250000	D.39
AIE M-SPX 0.25-1.5 S	9204550000	C.11	CRIMPFIX MAGAZIN	2443370000	I.23	ERSATZMESSERSATZ TT864	9008130000	D.31	ES EPG 60/HPG 6 HEX 240	2505260000	D.39
AIE M-SPX 1.5-6.0 S	9204570000	C.11	CRIMPFIX R	9028500000	I.23	ERTE AIME SPX II	2917160000	D.8	ES EPG 60/HPG 6 HEX 25	2505180000	D.39
AIE MULTI-SPX 0.75-4"SL	9203730000	C.11	CRIMPFIX R VARIO	2580000000	I.23	ERTE KLCB SPX 10	2571480000	C.4	ES EPG 60/HPG 6 HEX 300	2505270000	D.39
AIE MULTI-STRIPAX 16 SL	9202270000	C.11	CRIMPFIX R VARIO PZ3	2912420000	I.23	ERTE KLCB SPX 16	2571490000	C.4	ES EPG 60/HPG 6 HEX 35	2505190000	D.39
AIE MULTI-STRIPAX 6-16	9202260000	C.11	CRIMPSET CTI 6	9202600000	H.38	ERTE KLCB SPX UL	2571500000	C.5	ES EPG 60/HPG 6 HEX 50	2505200000	D.39
AIE MULTI-STRIPAX ASI	9202300000	C.11	CRIMPSET PZ / CTI	9202610000	H.39	ES APG 80 AEH 120	1502090000	D.41	ES EPG 60/HPG 6 HEX 6	2505150000	D.39
AIE MULTI-STRIPAX AWG	9202280000	C.11	CRIMPSET PZ 10 HEX	1542250000	H.36	ES APG 80 AEH 150	1502100000	D.41	ES EPG 60/HPG 6 HEX 70	2505210000	D.39
AIE MULTI-STRIPAX GKWLW	9205770000	C.11	CRIMPSET PZ 10 HEX D	1542260000	H.36	ES APG 80 AEH 50	1502050000	D.41	ES EPG 60/HPG 6 HEX 95	2505220000	D.39
AIE MULTI-STRIPAX PDF	1212770000	C.11	CRIMPSET PZ 10 HEX T	1542270000	H.36	ES APG 80 AEH 70	1502070000	D.41	ES EPG 60/HPG 6 WM 10	2469540000	D.39
AIE MULTI-STRIPAX PV	1204280000	C.11	CRIMPSET PZ 10 SDR	1542280000	H.36	ES APG 80 AEH 185	1502080000	D.41	ES EPG 60/HPG 6 WM 120	2469610000	D.39
AIMESA V	9050180000	I.19	CRIMPSET PZ 10 SQR D	1542290000	H.36	ES APG 80 DIN 10	1502830000	D.41	ES EPG 60/HPG 6 WM 150	2469620000	D.39
AIZ 160	9046440000	E.7	CRIMPSET PZ 10 SQR T	1542310000	H.36	ES APG 80 DIN 120	1502790000	D.41	ES EPG 60/HPG 6 WM 16	2469550000	D.39
AKKU DMS 3	9007450000	F.7	CROSS-KEY MASTER	9918150000	F.36	ES APG 80 DIN 120	1502870000	D.41	ES EPG 60/HPG 6 WM 185	2469630000	D.39
AKKU DMS PRO	1479110000	F.6	CROSS-KEY UNIVERSAL	9918130000	F.36	ES APG 80 DIN 50	1502880000	D.41	ES EPG 60/HPG 6 WM 240	2469640000	D.39
AKKU LI 1882	2858730000	D.33	CROSS-KEY-UNIVERSALS	9918140000	F.37	ES APG 80 DIN 6	1502820000	D.41	ES EPG 60/HPG 6 WM 25	2469560000	D.39
AKKU LI 1882	2858730000	D.36	CROSS-KEY-DUO	1480190000	F.37	ES APG 80 DIN 70	1502890000	D.41	ES EPG 60/HPG 6 WM 300	2469650000	D.39
AKKU LI 1882	2858730000	D.38	CROSS-KEY-QUADRO	1480180000	F.37	ES APG 80 DIN 95	1502900000	D.41	ES EPG 60/HPG 6 WM 35	2469570000	D.39
AKKU LI 1882	2858730000	D.40	CST	9030500000	C.14	ES APG 80 DIN 10	1502830000	D.41	ES EPG 60/HPG 6 WM 50	2469580000	D.39
AKKU LI 1885	2860070000	D.33	CST VARIO	9005700000	C.15	ES APG 80 DIN 25	1502850000	D.41	ES EPG 60/HPG 6 WM 60	2469380000	D.39
AKKU LI 1885	2860070000	D.38	CTF 63	9202860000	D.7	ES APG 80 DIN 50	1502870000	D.41	ES EPG 60/HPG 6 WM 70	2469590000	D.39
AKKU LI 1885	2860070000	D.40	CTF 63 G	9202860000	D.18	ES APG 80 DIN 120	1502880000	D.41	ES EPG 60/HPG 6 WM 95	2469600000	D.39
AM 12	9030060000	C.13	CTF 63 ZERT	1077010000	D.18	ES APG 80 HEX 10	1502620000	D.41			
AM 16	9204190000	C.12	CTF 63 ZERT	1222870000	D.26	ES APG 80 HEX 120	1502700000	D.41			
AM 25	9001540000	C.12	CTF 64	9006120000	D.19	ES APG 80 HEX 150	1502730000	D.41			
AM LWL/POF	9020360000	D.45	CTF 64 ZERT	9006120000	D.19	ES APG 80 HEX 185	1502740000	D.41			
AM-X	2625720000	C.13	CTF PV WM4	1222870000	D.26	ES APG 80 HEX 240	1502750000	D.41			
APG 80	2853270000	D.40	CTF 65	9006120000	D.19	ES APG 80 HEX 25	1502760000	D.41			
AUTOMATIC CENTRE PUNCH	2888460000	H.46	CTF 65 ZERT	1292880000	D.19	ES APG 80 HEX 300	1502780000	D.41			
<b>B</b>			CTF 66	9006230000	D.7	ES APG 80 HEX 35	1502850000	D.41			
BATTERIE 1,5V MICRO	9201310000	G.6	CTF 66 ZERT	1077010000	D.18	ES APG 80 HEX 50	1502870000	D.41			
BATTERIE 1,5V MICRO	9201310000	G.7	CTF 67	9006230000	D.21	ES APG 80 HEX 6	1502880000	D.41			
BATTERIE 1,5V MICRO	9201310000	G.15	CTF 67 ZERT	1292870000	D.21	ES APG 80 HEX 10	1502900000	D.41			
BATTERIE 1,5V MICRO	9201310000	G.16	CTF 68	9006230000	D.21	ES APG 80 HEX 120	1502920000	D.41			
BHS 1/4	2748120000	F.9	CTF 68 ZERT	1292870000	D.21	ES APG 80 HEX 150	1502940000	D.41			
BIT C 6,3.0,5X3,0X25	2748860000	F.10	CTF 69	9006230000	D.21	ES APG 80 HEX 185	1502960000	D.41			
BIT C 6,3.0,5X3,5X25	2748870000	F.10	CTF 70	9006230000	D.21	ES APG 80 HEX 240	1502980000	D.41			
BIT C 6,3.0,5X4,0X25	2748880000	F.10	CTF 71	9006120000	D.7	ES APG 80 HEX 25	1502990000	D.41			
BIT C 6,3.0,8X5,5X25	2748890000	F.10	CTF 72	9006120000	D.19	ES APG 80 HEX 300	1503010000	D.41			
BIT C 6,3 PHOX25	2748140000	F.10	CTF 72 ZERT	1270320000	D.22	ES APG 80 HEX 300AL	1503020000	D.41			
BIT C 6,3 PH1X25	2748150000	F.10	CUTFIX PRO	2797190000	I.18	ES APG 80 HEX 35	1502650000	D.41			
BIT C 6,3 PH2X25	2748160000	F.10	CUTFIX PRO FEEDER	2797200000	I.18	ES APG 80 WM 120	1502540000	D.41			
BIT E6.3.0,4X2,5X70	2748900000	F.8	CTIN CM 1.6/2.5	9205430000	D.6	ES APG 80 WM 150	1502550000	D.41			
BIT E6.3.0,5X3,0X70	2748910000	F.8	CTIN CM 3.6	9205440000	D.22	ES APG 80 WM 185	1502570000	D.41			
BIT E6.3.0,8X4,0X70	2748930000	F.8	DMS 3	9007440000	F.7	ES APG 80 WM 240	1502580000	D.41			
BIT E6.3.1,0X5,5X70	2748940000	F.8	DMS 3 ZERT	9017870000	F.7	ES APG 80 WM 25	1502480000	D.41			
BIT E6.3.1,2X6,5X70	2748950000	F.8	DMS MANUELL 0.5-1,7	9918370000	F.13	ES APG 80 WM 300	1502590000	D.41			
BIT E6.3.1,2X6,5X70	2748960000	F.8	DMS MANUELL 2.0-7,0	9918380000	F.13	ES APG 80 WM 35	1502490000	D.41			
BIT E6.3.1,2X6,5X70	2748970000	F.8	DMS PRO	1479120000	F.6	ES APG 80 WM 50	1502500000	D.41			
BIT E6.3.1,2X6,5X70	2748980000	F.8	DMS PRO ZERT	1987840000	D.22	ES APG 80 WM 6	1502430000	D.41			
BIT E6.3.1,2X6,5X70	2748990000	F.8	DMSI MANUELL 0.5-1,7	9918390000	F.14	ES APG 80 WM 70	1502520000	D.41			
BIT E6.3.1,2X6,5X70	2749000000	F.8	DMSI MANUELL 2.0-7,0	9918400000	F.14	ES APG 80 WM 95	1502530000	D.41			
BIT E6.3.1,2X6,5X70	2749010000	F.8	DW RSV 1.6	9004530000	D.44	ES APG 80 WM 10	1502540000	D.41			
BIT E6.3.1,2X6,5X70	2749020000	F.8	EASYCRIMP	2000360000	D.48	ES APG 80 WM 120	1502550000	D.41			
BIT E6.3.1,2X6,5X70	2749030000	F.8	EINSATZ A7-1 CL55	9028450000	H.41	ES EPG 45 DIN 6	1501290000	D.37			
BIT E6.3.1,2X6,5X70	2749040000	F.8	EINSATZ A8-1 CL55	9028460000	H.41	ES EPG 45 DIN 70	1501380000	D.37			
BIT E6.3.1,2X6,5X70	2749050000	F.8	EINSATZ A8-2 CL55	9028420000	H.41	ES EPG 45 HEX 10/70	1500940000	D.37			
BIT E6.3.1,2X6,5X70	2749060000	F.8	EINSATZ A9-1 CL55	9020200000	H.41	ES EPG 45 HEX 120	1994540000	D.37			
BIT E6.3.1,2X6,5X70	2749070000	F.8	EINSATZ A9-2 CL55	9023260000	H.41	ES EPG 45 HEX 150	1500920000	D.37			
BIT E6.3.1,2X6,5X70	2749080000	F.8	EINSATZ A9-2 CL55	9023260000	H.41	ES EPG 45 HEX 15/35	1500930000	D.37			
BIT E6.3.1,2X6,5X70	2749090000	F.8	EINSATZ A9-2 CL55	9023260000	H.41	ES EPG 45 HEX 25/50	1500940000	D.37			
BIT E6.3.1,2X6,5X70	2749100000	F.8	EINSATZ A9-2 CL55	9023260000	H.41	ES EPG 45 HEX 50	1500950000	D.37			
BIT E6.3.1,2X6,5X70	2749110000	F.8	EINSATZ A9-2 CL55	9023100000	H.42	ES EPG 45 HEX 50	1500970000	D.37			
BIT BOX 11	2748110000	F.9	EINSATZ A9-2 CL55	9023100000	H.42	ES EPG 45 HEX 6	1500930000	D.37			
BIT BOX 11 TRX + IS	2937020000	F.9	EINSATZ PAAR PZ 16E	9012640000	L.21	ES EPG 45 HEX 95	1500980000	D.37			
BLOCKBATTERIE 9V	9004810000	G.11	EINSTELLBLOCK CST	9005800000	C.14	ES EPG 45 WM 10/70	1500870000	D.37			
BLOCKBATTERIE 9V	9004810000	G.12	EPG 45	1500830000	D.36	ES EPG 45 WM 120	1500900000	D.37			
CA 100 DUO	2740900000	I.25	EPG 60								

Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
H0,5/14D ZH W SV	9004780000	J.8	H1,0/14DS R BD GSP	2528610000	J.10	H1,0/30S ZH EB	9018870000	J.11	H4,0/22D ZH GR SV	9004730000	J.8
H0,5/14DS W BD GSP	2528590000	J.10	H1,0/14S GE	9025970000	J.10	H1,0/30T ZH BR	9037720000	J.7	H4,0/22T ZH OR	9037670000	J.7
H0,5/14S OR	9004560000	J.10	H1,0/14S GE BD GSP	2528550000	J.10	H120,0/32	9036240000	J.12	H4,0/22T ZH SR	9018590000	J.8
H0,5/14S OR BD GSP	2528550000	J.10	H1,0/14S GE SV	9025710000	J.10	H120,0/50 BL	9028220000	J.4	H4,0/26D GR	9019210000	J.4
H0,5/14S W	9004590000	J.10	H1,0/14S R	9018560000	J.10	H150,0/32	9036250000	J.12	H4,0/26T OR	9021120000	J.4
H0,5/16 DS W	9202910000	J.10	H1,0/15 ZH GE	9037260000	J.7	H150,0/54 GE	9028230000	J.4	H4,0/28D ZH GR	9037540000	J.7
H0,5/16 OR	9025870000	J.4	H1,0/15 ZH GE SV	9018530000	J.8	H16,0/12	0492500000	J.12	H4,0/28T ZH OR	9037680000	J.7
H0,5/16 OR BD GSP	1476010000	J.6	H1,0/15D ZH R	9037440000	J.7	H16,0/15	0124300000	J.12	H4,0/9	0373100000	J.12
H0,5/16 OR SV	9028270000	J.5	H1,0/15D ZH R SV	9018540000	J.8	H16,0/18	0375200000	J.12	H50,0/18	9004210000	J.12
H0,5/16 ZH OR	9037210000	J.7	H1,0/15S ZH GE	9018690000	J.7	H16,0/22 GN	0565900000	J.4	H50,0/22S	9025880000	J.12
H0,5/16D W	9019020000	J.4	H1,0/15S ZH GE SV	9018650000	J.8	H16,0/22D BL	9019260000	J.4	H50,0/32	9004220000	J.12
H0,5/16D W BD GSP	1476070000	J.6	H1,0/16 DS R	2092480000	J.10	H16,0/22T W	9021170000	J.4	H50,0/36 OUV	0444200000	J.4
H0,5/16D ZH W	9037390000	J.7	H1,0/16 GE	9025950000	J.4	H16,0/25	9004150000	J.12	H50,0/36D BL	9019340000	J.4
H0,5/16DS W BD GSP	2604630000	J.10	H1,0/16 GE BD GSP	1476040000	J.6	H16,0/25,5 X BL SV	9006870000	J.9	H50,0/410 BL	9019350000	J.4
H0,5/16S OR	9202900000	J.10	H1,0/16 GE SV	9028320000	J.5	H16,0/28 GN	0566000000	J.4	H60,0/10	9004120000	J.12
H0,5/16S OR BD GSP	2604620000	J.10	H1,0/160 R	9019100000	J.4	H16,0/28D BL	9019270000	J.4	H60,0/12	0191900000	J.12
H0,5/18 OR	1076980000	J.4	H1,0/160 R BD GSP	1476090000	J.6	H16,0/28T W	9021180000	J.4	H60,0/15	0124700000	J.12
H0,5/18 ZH OR	9037220000	J.7	H1,0/160S R BD GSP	2604690000	J.10	H16,0/29 ZH GN	9037360000	J.7	H60,0/18	9004130000	J.12
H0,5/18D W	1076990000	J.4	H1,0/165 GE BD GSP	2604680000	J.10	H16,0/29D ZH BL	9037590000	J.7	H60,0/20 SW	0535300000	J.4
H0,5/18D ZH W	9037400000	J.7	H1,0/178 GE	9025930000	J.4	H16,0/29T ZH W	9037730000	J.7	H60,0/20D GE	9019220000	J.4
H0,5/6	0282600000	J.12	H1,0/18 GE SV	9028340000	J.5	H16,0/32	9004160000	J.12	H60,0/20T GN	9021130000	J.4
H0,5/7	2919640000	J.12	H1,0/180 R	9019110000	J.4	H16,0/38 ZH GN	9037370000	J.7	H60,0/23 ZH SW	9037320000	J.7
H0,5/8	2984690000	J.12	H1,0/19 ZH GE	9037270000	J.7	H16,0/38D ZH BL	9037600000	J.7	H60,0/23 ZH SW SV	9004930000	J.8
H0,75/10	0542500000	J.12	H1,0/19 ZH GE SV	9004910000	J.8	H16,0/38T ZH W	9037740000	J.7	H60,0/23D ZH GE	9037550000	J.7
H0,75/12 D W	0409600000	J.4	H1,0/190 ZH R	9037450000	J.7	H18,0/32	9036260000	J.12	H60,0/23D ZH GE SV	9004720000	J.8
H0,75/12 D W SV	9028280000	J.5	H1,0/19D ZH R SV	9004760000	J.8	H2,5/10	9004080000	J.12	H60,0/23T ZH GN	9037690000	J.7
H0,75/12D GR	9019030000	J.4	H1,0/22DS R ZH	90186330000	J.7	H2,5/12	0186100000	J.12	H60,0/23T ZH GN SV	9005160000	J.8
H0,75/12T HBL	9021030000	J.4	H1,0/25 ZH GE	9037280000	J.7	H2,5/12DS BL	9028490000	J.10	H60,0/23X GE SV	9006790000	J.9
H0,75/14 W	0462900000	J.4	H1,0/250 ZH R	9037460000	J.7	H2,5/12TS GR	9036200000	J.10	H60,0/26 SW	0565700000	J.4
H0,75/14 W BD	9004290000	J.5	H1,0/6	0372600000	J.12	H2,5/14D BLBD	9004360000	J.5	H60,0/26D GE	9019230000	J.4
H0,75/14 W BD GSP	9005820000	J.6	H2,5/14 GE	2874610000	J.12	H2,5/14D BLBD GSP	9005850000	J.6	H60,0/26T GN	9021140000	J.4
H0,75/14 W SP	1476240000	J.4	H1,5/10	0186500000	J.12	H2,5/14DS BL	1333100000	J.10	H60,0/29 ZH SW	9037330000	J.7
H0,75/14 W SV	9026070000	J.5	H1,5/12	9004060000	J.12	H2,5/145 BL SV	9046230000	J.10	H60,0/29D ZH GE	9037560000	J.7
H0,75/14 ZH W	9037230000	J.7	H1,5/12S	9025690000	J.10	H2,5/14T GR BD	9004370000	J.5	H60,0/29T ZH GN	903770000	J.7
H0,75/14 ZH W SV	9018510000	J.8	H1,5/14 R	0463100000	J.4	H2,5/14T GR BD GSP	9005910000	J.6	H70,0/25	9004230000	J.12
H0,75/14D GR	9019040000	J.4	H1,5/14 R BD	9004340000	J.5	H2,5/14TS GR	90246770000	J.10	H70,0/32	9004240000	J.12
H0,75/14D GR BD	9004030000	J.5	H1,5/14R BD GSP	9005840000	J.6	H2,5/16 BL BD GSP	9037500000	J.7	H70,0/37 GE	902820000	J.4
H0,75/14D GR BD GSP	9005870000	J.6	H1,5/14R SP	1476270000	J.4	H2,5/16D BL	9019160000	J.4	H95,0/25	9004250000	J.12
H0,75/14D GR SP	1476310000	J.4	H1,5/14R SV	9026090000	J.5	H2,5/165 BL SP	1476280000	J.4	H95,0/32	9004260000	J.12
H0,75/14D GR SV	9019410000	J.5	H1,5/14S	9019120000	J.4	H2,5/14T GR BD	9021070000	J.4	H95,0/44 R	9028210000	J.4
H0,75/14D ZH GR	9037410000	J.7	H1,5/14S BD	9004350000	J.5	H2,5/15T GR SV	9021240000	J.5	HAMMER	2888420000	H.45
H0,75/14D ZH GR SV	9018520000	J.8	H1,5/14S BD GSP	9005890000	J.6	H2,5/16D BL BD GSP	1476060000	J.6	HBT 1,5 - 3,0 RT	1312440000	J.26
H0,75/14D S GR	9028580000	J.10	H1,5/14S SP	1476330000	J.4	H2,5/165 BL SV	9036220000	J.10	HBT 1,5 - 4,6 RT	123334000	J.26
H0,75/14DS GR BD GSP	2528600000	J.10	H1,5/14S SV	9019430000	J.5	H2,5/16T GR BD GSP	1476120000	J.6	HBT 2,5 - 3,0 BL	1312450000	J.26
H0,75/14W	9025960000	J.10	H1,5/14DS SV	9025240000	J.10	H2,5/17,5 BL SV	9006670000	J.9	HBT 2,5 - 4,6 BL	123333000	J.26
H0,75/14W BD GSP	2528560000	J.10	H1,5/14DS BD GSP	2528620000	J.10	H2,5/18	9004090000	J.12	HBT 6,0 - 3,0 GE	1312470000	J.26
H0,75/14S W SV	9025700000	J.10	H1,5/14DS SV	9028360000	J.10	H2,5/19D BL	9019170000	J.4	HBT 6,0 - 4,6 GE	1216230000	J.26
H0,75/14T ZH HBL	9037610000	J.7	H1,5/14S	9028350000	J.5	H2,5/195 ZH BL	9006710000	J.9	HOOKBLA 0,25-1,5 SW	9036290000	J.26
H0,75/14T BL BD GSP	9005900000	J.6	H1,5/14S BD GSP	2528580000	J.10	H2,5/195 ZH BL SV	9004430000	J.8	HOOKBLA 1,0-2,5 SW	9036300000	J.26
H0,75/14T HBL	9021040000	J.4	H1,5/14S R	9025720000	J.10	H2,5/19T GR	9021080000	J.4	HPG 60	2453820000	D.38
H0,75/14T HBL BD	9004310000	J.5	H1,5/16 DS	2092490000	J.10	H2,5/19T ZH GR	9037640000	J.7	HBT 28	9013090000	D.7
H0,75/14T HBL SV	9021230000	J.5	H1,5/16 R	0635100000	J.4	H2,5/19T ZH GR SV	9018580000	J.8	HBT 28 ZERT	9017410000	D.18
H0,75/14TS HD BD GSP	2528630000	J.10	H1,5/16 R BD GSP	1476050000	J.6	H2,5/21 ZH GR SV	9005150000	J.8	HBT 28 ZERT	9017410000	D.18
H0,75/14TS HBL	9018550000	J.10	H1,5/16 R SV	9004420000	J.8	H2,5/215X BL SV	9006710000	J.9	HBT 48	9013080000	D.7
H0,75/15S W	9204240000	J.10	H1,5/16 ZH R	9037290000	J.7	H2,5/215X BL SV	9037510000	J.7	HBT 48	9013080000	D.18
H0,75/15T ZH BL SV	9018570000	J.8	H1,5/16 ZH R SV	9004410000	J.8	H2,5/21D ZH BL SV	9004740000	J.8	HBT 48 ZERT	9017260000	D.18
H0,75/16 W	9025860000	J.4	H1,5/16D SW	9019130000	J.4	H2,5/21T ZH GR	9037650000	J.7	HBT 63	9013400000	D.7
H0,75/16 W BD GSP	1476030000	J.6	H1,5/16D SW BD GSP	1476100000	J.6	H2,5/24 XS BL	90202880000	J.9	HBT 63 ZERT	9013400000	D.18
H0,75/16 S W SV	9028290000	J.5	H1,5/16D ZH SW	9037470000	J.7	H2,5/25D BL	9019180000	J.4	HBT AFK 2.5	9021040000	D.6
H0,75/16 ZH W	9037240000	J.7	H1,5/16D ZH SW SV	9004420000	J.8	H2,5/25T GR	9020190000	J.4	HBT AFK 2.5	9021040000	D.29
H0,75/16 ZH W SV	9004900000	J.8	H1,5/16D SW BD GSP	2604710000	J.10	H2,5/27D BL	9037560000	J.7	HBT DFF	9014140000	D.6
H0,75/16D GR	9019050000	J.4	H1,5/16D SW SV	2604700000	J.10	H2,5/27T ZH GR	9037660000	J.7	HBT DFF	9014140000	D.29
H0,75/16D GR BD GSP	1476080000	J.6	H1,5/16D SW SV	9006590000	J.9	H2,5/7	9037000000	J.7	HBT DFF	9014140000	D.29
H0,75/16D ZH GR	9037420000	J.7	H1,5/18	9004070000	J.12	H2,5/10	0124400000	J.12	HBT DFF	9014140000	D.29
H0,75/16D ZH GR SV	9004770000	J.8	H1,5/180 R	9019140000	J.4	H2,5/10	0124400000	J.12	HBT DFF	9014140000	D.29
H0,75/16DS GR	2091010000	J.10	H1,5/18 ZH SV	9006630000	J.9	H2,5/10	0124400000	J.12	HBT DFF	9014140000	D.29
H0,75/16DS GR BD GSP	2604650000	J.10	H1,5/180 R BD GSP	2604700000	J.10	H2,5/10	0124400000	J.12	HBT DFF	9014140000	D.29
H0,75/16S W BD GSP	2604640000	J.10	H1,5/20 ZH R SV	9004920000	J.8	H2,5/10/16 GE	9019280000	J.4	HBT DFF	9014140000	D.29
H0,75/16T BL BD GSP	1476110000	J.6	H1,5/20 DS ZH SV	9004750000	J.8	H2,5/10/30 DT	9017880000	J.29	HBT DFF	9014140000	D.29
H0,75/16T HBL	9021050000	J.4	H1,5/20 DS	9037480000	J.7	H2,5/10/32 DS BE	9017880000	J.29	HBT DFF	9014140000	D.29
H0,75/16T ZH HBL	9037620000	J.7	H1,5/24 R	0565600000	J.4	H2,5/10/36 BR	0317100000	J.4	HBT DFF	9014140000	D.29
H0,75/16T ZH BL SV	9005140000	J.4	H1,5/24 XS	9028700000	J.9	H2,5/10/36D GE	9019300000	J.4	HBT DFF	9014140000	D.29
H0,75/16TS HBL BD GSP	2604660000	J.10	H1,5/24 DS	9019150000							

Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
I			KP-M12/-95	1498210000	K.17	KOIG-M5/-2.5	1492640000	J.19	KONG-M3/-2.5	1493600000	K.25
IE-CST	9204350000	C.14	KP-M12/35	1498050000	K.17	KOIG-M5/-6	1491280000	J.19	KONG-M4/-1	1493570000	K.25
IE-CT	8808420000	G.14	KP-M14/120	1498580000	K.18	KOIG-M6/-1	1492590000	J.19	KONG-M4/2.5	1493600000	K.25
IE-CT-LC-GOF	9205330000	D.7	KP-M14/150	1498590000	K.18	KOIG-M6/-10	1491340000*	J.19	KONG-M4/6	1493600000	K.25
IE-CT-LC-GOF	9205330000	D.24	KP-M14/185	1498590000	K.18	KOIG-M6/-16	1491350000*	J.19	KONG-M4/S/-1	1493560000	K.25
IE-CT-SC-GOF	9205320000	D.7	KP-M14/240	1498590000	K.18	KOIG-M6/-2.5	1491260000	J.19	KONG-M4/S/2.5	1493620000	K.25
IE-CT-SC-GOF	9205320000	D.24	KP-M14/-300	1498550000	K.18	KOIG-M6/-6	1491290000	J.19	KONG-M5/-1	1493580000	K.25
IE-CT-SC-GOF	9205320000	D.24	KP-M14/-50	1498570000	K.17	KOIG-M8/-16	1491360000*	J.19	KONG-M5/-10	1492680000	K.25
IE-CT-SC-GOF-P	9205350000	D.7	KP-M14/-70	1498560000	K.17	KOIG-M8/-6	1491310000	J.19	KONG-M5/2.5	1493640000	K.25
IE-CT-SC-GOF-P	9205350000	D.24	KP-M14/-95	1498520000	K.17	KON-M10/-1	1493710000	K.23	KONG-M5/-6	1492650000	K.25
IE-CT-SC-POF	9205340000	D.7	KP-M16/120	1498270000	K.18	KON-M10/-10	1494050000	K.24	KONG-M6/-1	1493590000	K.25
IE-CT-SC-POF	9205340000	D.24	KP-M16/150	1498330000	K.18	KON-M10/-120	1493330000	K.24	KONG-M6/-10	1492690000	K.25
IE-KO-HAT	1966810000	B.15	KP-M16/185	1498370000	K.18	KON-M10/-150	1493370000	K.24	KONG-M6/-16	1492700000	K.25
IE-KOK-V1	1966780000	B.16	KP-M16/240	1498420000	K.18	KON-M10/-16	1494100000	K.24	KONG-M6/-2.5	1493650000	K.25
IE-KOK-V4	1966790000	B.16	KP-M16/25	1498010000	K.17	KON-M10/-185	1498010000	K.24	KONG-M6/-6	1492660000	K.25
IE-KOK-V5	9204790000	B.16	KP-M16/300	1498460000	K.18	KON-M10/2.5	1493930000	K.23	KONG-M8/-16	1492710000	K.25
IS 4 DIN 6911	0485100000	F.36	KP-M16/-35	1498060000	K.17	KON-M10/240	1493460000	K.24	KONG-M8/-6	1492670000	K.25
IS 6 DIN 6911	0407900000	F.36	KP-M16/-50	1498110000	K.17	KON-M10/25	1494150000	K.24	KRM-M10/10	1496940000	K.9
K			KP-M16/-70	1498160000	K.17	KON-M10/35	1494190000	K.24	KRM-M10/120	1495650000	K.10
KABELBINDERZANGE RT-1	1296000000	D.46	KP-M16/-95	1498220000	K.17	KON-M10/50	1493160000	K.24	KRM-M10/120 S	1494920000	K.11
KBZ 160	9046280000	E.3	KP-M20/150	1498340000	K.18	KON-M10/70	1493220000	K.24	KRM-M10/150	1494950000	K.11
KBZ 180	9046290000	E.3	KP-M20/185	1498380000	K.18	KON-M10/95	1493270000	K.24	KRM-M10/16	1497000000	K.9
KBZ 200	9046300000	E.3	KP-M20/240	1498430000	K.18	KON-M12/-10	1494060000	K.24	KRM-M10/185	1495430000	K.10
KBZI 200	9046430000	E.3	KP-M20/300	1498470000	K.18	KON-M12/120	1493340000	K.24	KRM-M10/185 S	1494980000	K.11
KOBBS 19X5	9205040000	B.14	KP-M20/50	1498120000	K.17	KON-M12/150	1493380000	K.24	KRM-M10/240	1495490000	K.10
KOBBS 19X55	9205040000	B.16	KP-M20/70	1498170000	K.17	KON-M12/16	1494110000	K.24	KRM-M10/240 S	1494340000	K.11
KOBBS 19X75	9204780000	B.14	KP-M20/95	1498230000	K.17	KON-M12/185	1493430000	K.24	KRM-M10/25	1496510000	K.9
KOBBS 19X75	9204780000	B.16	KP-M5/-10	1497870000	K.17	KON-M12/2.5	1493940000	K.23	KRM-M10/300	1495530000*	K.10
KOBBS 9.5X50	9205030000	B.14	KP-M5/16	1497920000	K.17	KON-M12/240	1493470000	K.24	KRM-M10/35	1496570000	K.10
KOBBS 9.5X50	9205030000	B.16	KP-M6/-10	1497880000	K.17	KON-M12/25	1494160000	K.24	KRM-M10/400	2578020000	K.10
KARRYLITE 80	1309580000	H.43	KP-M6/16	1497930000	K.17	KON-M12/35	1493130000	K.24	KRM-M10/50	1496610000	K.10
KOF SET ESD	9205210000	E.12	KP-M6/25	1497970000	K.17	KON-M12/50	1493170000	K.24	KRM-M10/50 S	1494840000	K.11
KOFFER CARRY LITE 55	9202000000	H.43	KP-M6/35	1498020000	K.17	KON-M12/6	1494000000	K.23	KRM-M10/6	1497200000	K.9
KOFFER PSC4-01	9028860000	H.43	KP-M6/50	1498510000	K.17	KON-M12/70	1493230000	K.24	KRM-M10/70	1496670000	K.10
KOFFER PSC5-01 PP	9202010000	H.44	KP-M6/6	1497850000	K.17	KON-M16/120	1493350000	K.24	KRM-M10/95	1495610000	K.10
KOFFER PSC80 PC	9202330000	H.43	KP-M8/10	1497890000	K.17	KON-M16/150	1493390000	K.24	KRM-M10/95 S	1494900000	K.11
KOHS 19	9205010000	B.14	KP-M8/120	1498480000	K.17	KON-M16/185	1493440000	K.24	KRM-M10/300 S	1494380000*	K.11
KOHS 19	9205010000	B.15	KP-M8/150	1498290000	K.18	KON-M16/240	1493480000	K.24	KRM-M12/10	1496950000	K.9
KOHS 9.5+19	9205000000	B.14	KP-M8/16	1497940000	K.17	KON-M16/25	1493490000	K.24	KRM-M12/120	1495670000	K.10
KOHS 9.5+19	9205000000	B.15	KP-M8/185	1498540000	K.17	KON-M16/35	1493140000	K.24	KRM-M12/120 S	1494930000	K.11
KOK 52 X1	2008410000	B.16	KP-M8/25	1497980000	K.17	KON-M16/50	1493180000	K.24	KRM-M12/150	1495720000	K.10
KOK 92 X 92	2008420000	B.16	KP-M8/35	1498030000	K.17	KON-M16/70	1493240000	K.24	KRM-M12/150 S	1494970000	K.11
KOK-12X36	9204870000	B.16	KP-M8/50	1498070000	K.17	KON-M16/95	1493290000	K.24	KRM-M12/185	1497010000	K.9
KOK-46X46	9204810000	B.16	KP-M8/6	1497860000	K.17	KON-M16/120	1493700000	K.24	KRM-M12/200	1495610000	K.10
KOK-52X36	9204820000	B.16	KP-M8/70	1498130000	K.17	KON-M2/0.5	1493670000	K.23	KRM-M12/240	1495650000	K.10
KOK-65X36	9204830000	B.16	KP-M8/95	1498180000	K.17	KON-M2/1	1493720000	K.23	KRM-M12/240 S	1495720000	K.11
KOK-88X8	9204840000	B.16	KOI-M10/1	1492130000	J.17	KON-M20/120	1493360000	K.24	KRM-M12/240	1494435000	K.11
KOK-86X36	9204850000	B.16	KOI-M10/10	1492470000	J.18	KON-M20/150	1493410000	K.24	KRM-M12/25	1496520000	K.9
KOK-91X36	9204860000	B.16	KOI-M10/16	1492510000	J.18	KON-M20/185	1493450000	K.24	KRM-M12/300	1495540000	K.10
KOPD 10.0	9205020000	B.15	KOI-M10/2.5	1492340000	J.17	KON-M20/35	1493520000	K.24	KRM-M12/300 S	1494439000*	K.11
KOS PG 13/M20	9204950000	B.14	KOI-M10/-6	1492410000	J.17	KON-M20/50	1493530000	K.24	KRM-M12/35	1496580000	K.10
KOS PG 13/M20	9204950000	B.15	KOI-M12/2.5	1492350000	J.17	KON-M20/70	1493250000	K.24	KRM-M12/400	2578030000	K.10
KOS-M16	9204880000	B.14	KOI-M12/6	1492420000	J.17	KON-M20/95	1493310000	K.24	KRM-M12/50	1496620000	K.10
KOS-M16	9204880000	B.16	KOI-M2/5.1	1492150000	J.17	KON-M3,5/1	1493750000	K.23	KRM-M12/6	1497210000	K.9
KOS-M25	9204900000	B.14	KOI-M2/5.5	1492090000*	J.17	KON-M3,5/2.5	1493830000	K.23	KRM-M12/7	1495570000	K.10
KOS-M25	9204900000	B.16	KOI-M2/1	1492140000	J.17	KON-M3/0.5	1493680000	K.23	KRM-M12/70 S	1494880000	K.11
KOS-M32	9204910000	B.14	KOI-M3,5/1	1492180000	J.17	KON-M3/1	1493740000	K.23	KRM-M12/95	1495620000	K.10
KOS-M32	9204910000	B.16	KOI-M3,5/2.5	1492270000	J.17	KON-M3/2.5	1493820000	K.23	KRM-M12/95 S	1494910000	K.11
KOS-M40	9204920000	B.14	KOI-M3/0.5	1492100000*	J.17	KON-M4/0.5	1493690000	K.23	KRM-M14/120	1495800000	K.10
KOS-M40	9204920000	B.16	KOI-M3/1	1492170000	J.17	KON-M4/1	1493770000	K.23	KRM-M14/150	1495810000	K.10
KOS-M50	9204900000	B.14	KOI-M3/2.5	1492250000	J.17	KON-M4/10	1494010000	K.24	KRM-M14/185	1497250000	K.10
KOS-M50	9204910000	B.16	KOI-M4/0.5	1492110000*	J.17	KON-M4/2.5	1493850000	K.23	KRM-M14/200	1495570000	K.10
KOS-M63	1548410000	B.14	KOI-M4/1	1492200000	J.17	KON-M4/6	1493480000	K.24	KRM-M14/240	1496530000	K.9
KOS-M63	1548400000	B.16	KOI-M4/6	1492220000	J.17	KON-M4/6	1493950000	K.23	KRM-M14/240 S	1496530000	K.9
KOS-PG11	9204940000	B.16	KOI-M4/2.5	1492100000*	J.17	KON-M4/10	1493760000	K.24	KRM-M14/300	1497280000	K.10
KOS-PG16	9204960000	B.14	KOI-M4/5	1492190000	J.17	KON-M4/10	1494020000	K.24	KRM-M14/300 S	1494439000*	K.11
KOS-PG16	9204960000	B.16	KOI-M4/5.5	1492120000*	J.17	KON-M5/10	1494020000	K.24	KRM-M14/350	1496580000	K.10
KOS-PG21	9204970000	B.14	KOI-M5/1	1492220000	J.17	KON-M5/16	1494070000	K.24	KRM-M16/150	1495730000	K.10
KOS-PG21	9204970000	B.16	KOI-M5/10	1492430000	J.17	KON-M5/2.5	1493890000	K.23	KRM-M16/185	1495450000	K.10
KOS-PG29	9204980000	B.14	KOI-M5/16	1492480000	J.18	KON-M5/25	1494120000	K.24	KRM-M16/200	1497280000	K.10
KOS-PG36	9204990000	B.14	KOI-M5/2.5	1492310000	J.17	KON-M5/6	1493660000	K.23	KRM-M16/240	1495510000	K.10
KOS-PG42	1548380000	B.16	KOI-M5/6	1492380000	J.17	KON-M5/S/1	1493870000	K.23	KRM-M16/240 S	1494370000	K.11
KOS-PG48	1548390000	B.16	KOI-M5/S/1	1492210000	J.17	KON-M5/S/2.5	1493870000	K.23	KRM-M16/300	1494440000*	K.11
KOS-PG9	9204930000	B.14	KOI-M5/S/2.5	1492300000	J.17	KON-M6/1	1493800000	K.23	KRM-M16/300 S	1494440000*	K.11
KOS-PG9	9204930000	B.16	KOI-M6/1	1492230000	J.17	KON-M6/10	1494030000	K.24	KRM-M16/400	2578040000	K.10
KP-M10/-10	1497910000	K.17	KOI-M6/10								

Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
KRN-M5-/1.5	1495070000*	K.9	KWN-M12-/150 45	1496450000	K.14	KWPN-M10-/120 90	1497750000	K.19	LIR 6M4 V	9200230000	J.17
KRN-M5-/10	1496910000	K.9	KWN-M12-/150 90	1494510000	K.13	KWPN-M10-/150 90	1497810000	K.19	LIR 6M5 V	9200240000	J.17
KRN-M5-/16	1496970000	K.9	KWN-M12-/16 90	1497120000	K.12	KWPN-M10-/16 90	1497470000	K.19	LIR 6M6 V	9200250000	J.17
KRN-M5-/2.5	1495100000*	K.9	KWN-M12-/185 45	1495350000	K.14	KWPN-M10-/185 90	1496690000	K.19	LIR 6M8 V	9200260000	J.17
KRN-M5-/25	1495830000	K.9	KWN-M12-/185 90	1494550000	K.13	KWPN-M10-/25 90	1497520000	K.19	LIS 1,5M3 V	9200290000	J.18
KRN-M5-/4	1495140000*	K.9	KWN-M12-/240 45	1495400000	K.14	KWPN-M10-/35 90	1497570000	K.19	LIS 1,5M3,5 V	9200300000	J.18
KRN-M5-/6	1497170000	K.9	KWN-M12-/240 90	1494610000	K.13	KWPN-M10-/50 90	1497610000	K.19	LIS 1,5M4 V	9200310000	J.18
KRN-M6-/1,5	1495080000*	K.9	KWN-M12-/25 45	1496210000	K.14	KWPN-M10-/70 90	1497650000	K.19	LIS 1,5M5 V	9200320000	J.18
KRN-M6-/10	1496920000	K.9	KWN-M12-/25 90	1495890000	K.12	KWPN-M10-/95 90	1497710000	K.19	LIS 1,5M6 V	9200330000	J.18
KRN-M6-/120 S	1494410000	K.11	KWN-M12-/300 90	1497300000	K.13	KWPN-M12-/120 90	1497760000	K.19	LIS 2,5M3 V	9200350000	J.18
KRN-M6-/150 S	1494440000	K.11	KWN-M12-/35 45	1496250000	K.14	KWPN-M12-/150 90	1497820000	K.19	LIS 2,5M3,5 V	9200360000	J.18
KRN-M6-/16	1496980000	K.9	KWN-M12-/35 90	1495940000	K.12	KWPN-M12-/16 90	1497480000	K.19	LIS 2,5M4 V	9200370000	J.18
KRN-M6-/2.5	1495110000*	K.9	KWN-M12-/50 45	1496300000	K.14	KWPN-M12-/185 90	1496700000	K.19	LIS 2,5M5 V	9200380000	J.18
KRN-M6-/25	1496490000	K.9	KWN-M12-/50 90	1495990000	K.13	KWPN-M12-/240 90	1496730000	K.19	LIS 2,5M6 V	9200390000	J.18
KRN-M6-/35	1496540000	K.10	KWN-M12-/6 90	1496170000	K.12	KWPN-M12-/25 90	1497530000	K.19	LIS 6M10 V	9200450000	J.18
KRN-M6-/35 S	1494790000	K.11	KWN-M12-/70 45	1496330000	K.14	KWPN-M12-/300 90	1496770000	K.19	LIS 6M4 V	9200410000	J.18
KRN-M6-/4	1495150000*	K.9	KWN-M12-/70 90	1496040000	K.13	KWPN-M12-/35 90	1497580000	K.19	LIS 6M5 V	9200420000	J.18
KRN-M6-/50	1496590000	K.10	KWN-M12-/95 45	1496370000	K.14	KWPN-M12-/50 90	1497620000	K.19	LIS 6M6 V	9200430000	J.18
KRN-M6-/50 S	1494820000	K.11	KWN-M12-/95 90	1496100000	K.13	KWPN-M12-/70 90	1497660000	K.19	LIS 6M8 V	9200440000	J.18
KRN-M6-/6	1497180000	K.9	KWN-M14-/25 90	1495900000	K.12	KWPN-M12-/95 90	1497720000	K.19	<b>M</b>		
KRN-M6-/70	1496640000	K.10	KWN-M14-/35 90	1494640000	K.12	KWPN-M16-/150 90	1497830000	K.19	M-D-STRIPAX	9001280000	C.6
KRN-M6-/70 S	1494850000	K.11	KWN-M14-/70 90	1494660000	K.13	KWPN-M16-/185 90	1496710000	K.19	M-D-STRIPAX +6 MEHA	9003500000	C.6
KRN-M6-/95	1495820000	K.10	KWN-M14-/95 90	1494670000	K.13	KWPN-M16-/240 90	1496740000	K.19	M-D-STRIPAX LWL	9003750000	C.7
KRN-M6-/95 S	1494430000	K.11	KWN-M14/50 90	1494650000	K.13	KWPN-M16-/300 90	1496780000	K.19	M-D-STRIPAX LWL	9003750000	D.45
KRN-M8-/10	1496930000	K.9	KWN-M16-/120 45	1496420000	K.14	KWPN-M16-/50 90	1497630000	K.19	MEHA KP BL M-D-SPX	9003630000	C.6
KRN-M8-/120	1495790000	K.10	KWN-M16-/120 90	1494480000	K.13	KWPN-M16-/70 90	1497680000	K.19	MEHA KP GE M-D-SPX	9003600000	C.6
KRN-M8-/120 S	1494420000	K.11	KWN-M16-/150 45	1496470000	K.14	KWPN-M16-/95 90	1497730000	K.19	MEHA KP GN M-D-SPX	9003620000	C.6
KRN-M8-/150	1495700000	K.10	KWN-M16-/150 90	1494520000	K.13	KWPN-M16-/120 90	1497770000	K.19	MEHA KP LVL M-D-SPX	9003760000	C.7
KRN-M8-/150 S	1494940000	K.11	KWN-M16-/185 45	1495370000	K.14	KWPN-M20-/120 90	1497780000	K.19	MEHA KP RT M-D-SPX	9003610000	C.6
KRN-M8-/16	1496990000	K.9	KWN-M16-/185 90	1494570000	K.13	KWPN-M20-/185 90	1496720000	K.19	MEHA KP SW M-D-SPX	9003640000	C.6
KRN-M8-/185	1497290000*	K.10	KWN-M16-/240 45	1495410000	K.14	KWPN-M20-/240 90	1496750000	K.19	MEHA KP WS M-SPX	9006970000	C.6
KRN-M8-/2,5	1495120000*	K.9	KWN-M16-/240 90	1494620000	K.13	KWPN-M20-/300 90	1496780000	K.19	MESSEREINSATZ CST VARIO	9005730000	C.15
KRN-M8-/240	1495480000*	K.10	KWN-M16-/300 90	1497310000	K.13	KWPN-M20-/300 90	1496868000	K.19	MESSERHALTER CST VARIO	9005740000	C.15
KRN-M8-/25	1496500000	K.9	KWN-M16-/35 90	1494690000	K.12	KWPN-M6-/10 90	1497420000	K.19	MULTI-STRIPAX 0.25-1.5S	9204540000	C.10
KRN-M8-/35	1496550000	K.10	KWN-M16-/50 90	1496000000	K.13	KWPN-M6-/16 90	1497440000	K.19	MULTI-STRIPAX 0.75-4 SL	9203610000	C.10
KRN-M8-/35 S	1494810000	K.11	KWN-M16-/70 90	1496050000	K.13	KWPN-M6-/25 90	1497490000	K.19	MULTI-STRIPAX 1.5-6.0S	9204560000	C.10
KRN-M8-/4	1495170000*	K.9	KWN-M16-/95 45	1496380000*	K.14	KWPN-M6-/35 90	1497540000	K.19	MULTI-STRIPAX 16 SL	9202220000	C.10
KRN-M8-/50	1496600000	K.10	KWN-M16-/95 90	1496110000	K.13	KWPN-M8-/10 90	1497430000	K.19	MULTI-STRIPAX 6-16	9202210000	C.10
KRN-M8-/50 S	1494830000	K.11	KWN-M20-/150 45	1496480000*	K.14	KWPN-M8-/150 90	1497790000	K.19	MULTI-STRIPAX ASI	9202250000	C.10
KRN-M8-/6	1497190000	K.9	KWN-M20-/150 90	1494530000	K.13	KWPN-M8-/16 90	1497450000	K.19	MULTI-STRIPAX AWG	9202230000	C.10
KRN-M8-/70	1496650000	K.10	KWN-M20-/185 45	1495380000	K.14	KWPN-M8-/185 90	1496800000	K.19	MULTI-STRIPAX G KW LW	9205760000	C.10
KRN-M8-/70 S	1494860000	K.11	KWN-M20-/185 90	1494860000	K.13	KWPN-M8-/25 90	1497510000	K.19	MULTI-STRIPAX IE-POF	1208880000	C.10
KRN-M8-/95	1495600000	K.10	KWN-M20-/240 45	1495240000	K.14	KWPN-M8-/35 90	1497550000	K.19	MULTI-STRIPAX PV	1190490000	C.10
KRN-M8-/95 S	1494890000	K.11	KWN-M20-/240 90	1494630000	K.13	KWPN-M8-/50 90	1497590000	K.19	MULTIMETER 1037	942358000	G.12
KSE 160	9046410000	E.4	KWN-M20-/300 90	1497320000	K.13	KWPN-M8-/70 90	1497640000	K.19	MULTIMETER C 2608	9427370000	G.12
KSE 200	9046420000	E.4	KWN-M20-/50 90	1494710000	K.13	KWPN-M8-/95 90	1497690000	K.19			
KSI/-10	1491430000	J.20	KWN-M20-/70 90	1496070000	K.13						
KSI/-16	1491440000	J.20	KWN-M3/-0,75 90	1495180000	K.12						
KSI/-0,1-0,5	1491370000	J.20	KWN-M3/-1,5 90	1495210000*	K.12						
KSI/0,5-1,0	1491380000	J.20	KWN-M4/-0,75 90	1495190000	K.12						
KSI/1,5-2,5	1491390000	J.20	KWN-M4/-1,5 90	1491220000*	K.12						
KSI/1,5-5	1491410000	J.20	KWN-M4/-2,5 90	1495250000*	K.12						
KSI/4,0-6,0	1491420000	J.20	KWN-M4/-4 90	1495300000*	K.12						
KSN/-10	1492780000	K.26	KWN-M5/-4 90	1497220000	K.12						
KSN/-16	1492790000	K.26	KWN-M5/-6 90	1497080000	K.12						
KSN/-2,5	1492750000	K.26	KWN-M5/-7,5 90	1495200000*	K.12						
KSN/-25	1492800000	K.26	KWN-M5/-10 90	1496810000	K.12						
KSN/-35	1492810000	K.26	KWN-M5/-12,5 90	1497020000	K.12						
KSN/-50	1492820000	K.26	KWN-M5/-16 45	1496850000	K.14						
KSN/-6,0	1492770000	K.26	KWN-M5/-16 90	1497220000	K.12						
KSN/-70	1492830000	K.26	KWN-M5/-2,5 90	1495270000*	K.12						
KSN/-95	1492840000	K.26	KWN-M5/-4 90	1495310000*	K.12						
KSN/0,1-0,5	1492720000	K.26	KWN-M5/-6 90	1497210000	K.12						
KSN/0,5-1,0	1492730000	K.26	KWN-M5/-1,5 90	1495240000*	K.12						
KSN/1,5-2,5	1492740000	K.26	KWN-M6/-10 45	1496820000	K.14						
KSN/12	9002660000	B.5	KWN-M6/-10 90	1497030000	K.12						
KT 12	1157820000	B.5	KWN-M6/-16 45	1496870000	K.14						
KT 22	1157830000	B.5	KWN-M6/-2,5 90	1495280000*	K.12						
KT 40	2993490000	B.5	KWN-M6/-25 45	1496180000	K.14						
KT 50	2993500000	B.6	KWN-M6/-25 90	1495850000	K.14						
KT 8	9002650000	B.4	KWN-M6/-35 45	1496220000	K.14						
KT 8S	2876450000	B.4	KWN-M6/-35 90	1495910000	K.12						
KT MINI	2876460000	B.9	KWN-M6/-4 90	1495320000*	K.12						
KT ZV	9002170000	B.9	KWN-M6/-50 45	1496270000*	K.14						
KWN-M10-/10 45	1496840000*	K.14	KWN-M6/-50 90	1495950000	K.13						
KWN-M10-/10 90	1497050000	K.12	KWN-M6/-6 90	1496130000	K.13						
KWN-M10-/120 45	1496400000	K.14	KWN-M6/-70 90	1496010000	K.13						
KWN-M10-/120 90	1494450000	K.13	KWN-M6/-16 90	1497090000	K.12						
KWN-M10-/150 45	1496440000	K.14	KWN-M8/-10 45	1496830000	K.14						
KWN-M10-/16 45	1496880000	K.14	KWN-M8/-10 90	1497040000	K.12						
KWN-M10-/16 90	1497110000	K.12	KWN-M8/-120 45	1496390000	K.13						
KWN-M10-/185 45	1495340000	K.14	KWN-M8/-120 90	1494680000	K.13						
KWN-M10-/185 90	1494540000	K.13	KWN-M8/-150 45	1496430000*	K.14						
KWN-M10-/240 45	1494590000	K.13	KWN-M8/-150 90	1494490000	K.13						
KWN-M10-/25 45	1496200000	K.14									

Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page	Type	Order No.	Page
PRO CASE ULTIMATE PLUS	2903610000	H.17	SD EL 0.4X2.0X60 PICO	2750070000	F.32	SDS 0.6X3.5X200	2749350000	F.29	TOP CASE	1345330000	H.22
PS LWL/PoF	9020390000	D.45	SD EL 0.4X2.5X75 PICO	2750080000	F.32	SDS 0.8X4.0X100	2749360000	F.29	TOP CASE 16	2602310000	H.20
PS_ZOV	1121740000	G.13	SD EL 0.5X3.0X75 PICO	2750090000	F.32	SDS 0.8X4.5X125	2749370000	F.29	TOP CASE CAB	2602290000	H.22
PS_ZOV_SET	1116710000	G.13	SD EL 0.8X4.0X100 PICO	2750110000	F.32	SDS 1.0X5.5X150	2749380000	F.29	TOP CASE ELEC	2602320000	H.21
PUK HACKSAW	2888390000	H.45	SD EL SET 1.5-4.0/PH0/1	2750160000	F.32	SDS 1.2X6.5X150	2749390000	F.29	TOP CASE INSTA	1345310000	H.19
PUNCH DOWN TOOL PDT	9013970000	D.43	SD ELEC PR	2855000000	F.33	SE HD 140	9046310000	E.4	TOP CASE PLUS	2903560000	H.15
PZ 1.5	9005990000	D.6	SD OPEN	2750180000	L.4	SE HD 160	9046320000	E.4	TOP CASE PREMIUM	1345320000	H.18
PZ 10 HEX	1445070000	D.6	SD SET S2.0-5.5	2750190000	F.30	SE HD 180	9046330000	E.4	TOP CASE STARTER	2903540000	H.14
PZ 10 HEX	1445070000	D.13	SD SET S2.5-5.5/PH1/2	2749220000	F.30	SE TOP	9046340000	E.4	TOP CASE ULTIMATE	2903580000	H.16
PZ 10 HEX	1445070000	J.3	SD SET T10/15/20/25/30/40 TR	2749230000	F.30	SEE ESD 120	9205130000	E.11	TOP CASE ULTIMATE PLUS	2903600000	H.17
PZ 10 HEX ZERT	1989320000	D.13	SD SK 10X125	2889850000	F.30	SEE ESD 125	9204750000	E.11	TSD 35/7.5/15	1318510000	B.12
PZ 10 SQR	1445080000	D.6	SD SK 13X125	2889860000	F.30	SK WSD-S 1.5-10,0	9008850000	F.34	TSDL G 632	9918700000	B.11
PZ 10 SQR	1445080000	D.13	SD SK 5,5X125	2889820000	F.30	SKAIT TASCHE	2544760000	G.6	TSDL C20	3093050000	B.11
PZ 10 SQR	1445080000	J.3	SD SK 7,0X125	2889830000	F.30	SKAIT TASCHE	2544760000	G.7	TSDL C30	3093070000	B.11
PZ 10 SQR ZERT	1989310000	D.13	SD SK 8,0X125	2889840000	F.30	SKAIT TASCHE	2544760000	G.8	TSDL C40	3103020000	B.11
PZ 16	9012600000	D.6	SD SK SET 5.5-13X125	2889870000	F.31	SKAIT TASCHE	2544760000	G.13	TT 1064 RS	9008190000	D.7
PZ 16	9012600000	D.14	SD T10 TR X 80	2749500000	F.29	SKS 2,0-8,0	9008860000	F.34	TT 1064 RS	9008190000	D.31
PZ 16	9012600000	J.3	SD T15 TR X 80	2749510000	F.29	SKS 2,0-8,0 MR	9008870000	F.34	TT 8 RS MP 8	9202800000	D.7
PZ 16 ZERT	9017340000	D.14	SD T20 TR X 100	2749520000	F.29	SLICER 1K	9918160000	B.18	TT 8 RS MP 8	9202800000	D.30
PZ 2.5 S	2903690000	D.6	SD T25 TR X 100	2749530000	F.29	SLICER 2K	9041600000	B.18	TT 864 RS	9008120000	D.7
PZ 2.5 S	2903690000	D.9	SD T30 TR X 115	2749540000	F.29	SLICER NO 16	9918070000	C.17	TT 864 RS	9008120000	D.31
PZ 2.5 S	2903690000	J.3	SD T40 TR X 115	2749550000	F.29	SLICER NO 27	9918080000	C.17	V		
PZ 3	0567300000	D.6	SD T7 TR X 80	2749470000	F.29	SOFT FACE HAMMER	2888430000	H.45	UBH 1/4 E 6,3	2748200000	F.9
PZ 3	0567300000	D.9	SD T8 TR X 60	2749480000	F.29	SP 303	9006890000	F.33	UBH SWH 1/4 EC 6,3	2749110000	F.9
PZ 3	0567300000	J.3	SD T9 TR X 60	2749490000	F.29	SPIRIT LEVEL	2888400000	H.45	URS CA 100 DUO D-10MM <sup>2</sup>	2769030000	I.25
PZ 3 ZERT	9017360000	D.9	SD TO 0,4X2,5	2749570000	F.29	STEEL SCALE 300MM	2888440000	H.45	URS CA 100 DUO D-6MM <sup>2</sup>	2769020000	I.25
PZ 4	9012500000	D.6	SD TO 0,6X3,0	2749560000	F.29	STORAGEBOX PCV	3043810000	I.21	URS CA 100 DUO S 4+10 MM	2912440000	I.25
PZ 4	9012500000	D.12	SDI SET S2.0-5.5	2749770000	F.27	STRIPAX	9005000000	C.4	URS CA 100 DUO S 6+10 MM	2912450000	I.25
PZ 4	9012500000	J.3	SDI SET S2.5-5.5/PH1/2	2749750000	F.27	STRIPAX 16 ZERT	9918180000	C.4			
PZ 4 ZERT	9017300000	D.12	SDI SET S2.5-5.5/PH1/2 VOLT	2854990000	F.27	STRIPAX PLUS 2.5	9020000000	D.6			
PZ 50	9006450000	D.6	SDI SET S2.5-5.5/PZ1/2	2749760000	F.27	STRIPAX PLUS 2.5	9020000000	D.8			
PZ 50	9006450000	D.15	SDI SET SLIM S3.5-6.5/PH1/2	2749580000	F.22	STRIPAX PLUS 2.5	9020000000	J.3			
PZ 50	9006450000	J.3	SDI SET SLIM S3.5-6.5/PZ1/2	2749590000	F.22	STRIPAX PLUS 2.5 ZERT	9171700000	D.8			
PZ 50 ZERT	9017400000	D.15	SDI SET SLIM T8/T9/T10/T15/T20/T25	2749600000	F.22	STRIPAX ULTIMATE	1468880000	C.5			
PZ 6 ROTO	9014350000	D.6	SDIK PH0 X 60	2749880000	F.25	STRIPAX ULTIMATE XL	1512780000	C.5			
PZ 6 ROTO	9014350000	D.11	SDIK PH1 X 80	2749890000	F.25	STRIPAX ZERT	9017330000	C.4			
PZ 6 ROTO	9014350000	J.3	SDIK PH2 X 100	2749900000	F.25	STRIPPER COAX	9918030000	C.18			
PZ 6 ROTO ADJ	2831380000	D.10	SDIK PH3 X 150	2749910000	F.25	STRIPPER PC	9918060000	C.18			
PZ 6 ROTO ADJ	2813380000	J.3	SDIK PZ1 X 80	2749920000	F.25	STRIPPER ROUND	9918040000	C.16			
PZ 6 ROTO ADJ ZERT	2831390000	D.10	SDIK PZ2 X 100	2749930000	F.25	STRIPPER ROUND TOP	9918050000	C.16			
PZ 6 ROTO L	1444050000	D.11	SDIK SLIM PH1 X 80	2749650000	F.21	SUPER CUT	9205150000	E.12			
PZ 6 ROTO L	1444050000	J.3	SDIK SLIM PH2 X 100	2749660000	F.21	SVSE ESD 130	9205140000	E.11			
PZ 6 ROTO L ZERT	1527230000	D.11	SDIK SLIM PZ1 X 80	2749670000	F.21	SWIFTY	9006020000	F.19			
PZ 6 ROTO ZERT	9017440000	D.11	SDIK SLIM PZ2 X 100	2749680000	F.21	SZE ESD 130	9204770000	E.11			
PZ 6/5	9011460000	D.6	SDIPM PH1 X 80	2749690000	F.25						
PZ 6/5	9011460000	D.12	SDIPM PH2 X 100	2749700000	F.25						
PZ 6/5	9011460000	J.3	SDIPM PZ1 X 80	2749940000	F.25						
PZ 6/5 ZERT	9017900000	D.12	SDIPM PZ2 X 100	2749950000	F.25						
PZ PK 10/120	1500480000	D.35	SDIPM SLIM PZ2 X 100	2749690000	F.21						
PZ PK 6/70	1500470000	D.34	SDIR 1 X 80	2750020000	F.26						
PZ RK 10/120	1500450000	D.38	SDIR 2 X 100	2750030000	F.26						
PZ RK 6/70	1500440000	D.34	SDIS 0,4X2,0X60	2749780000	F.25						
PZ ZH 16	9013600000	D.6	SDIS 0,4X2,5X75	2749790000	F.25						
PZ ZH 16	9013600000	D.14	SDIS 0,5X3,0X100	2749800000	F.25						
PZ ZH 16	9013600000	J.3	SDIS 0,6X3,5X100	2749810000	F.25						
PZ ZH 16 ZERT	9013610000	D.14	SDIS 0,8X4,0X100	2749820000	F.25						
R			SDIS 1,0X4,5X125	2749830000	F.25						
RAILASSEMBLER	2738690000	I.3	SDIS 1,0X4,5X175	2749840000	F.25						
RAILASSEMBLER + RAILCUTTER	2994740000	I.5	SDIS 1,0X5,5X125	2749850000	F.25						
RAILASSEMBLER + RAILCUTTER US VERSION	2994750000	I.5	SDIS 1,0X5,5X100	2749610000	F.21						
RAILCUTTER RETROFIT	2994760000	I.5	SDIS 1,0X6,3X100	2749620000	F.21						
REMOVAL TOOL AFK	1866760000	D.44	SDIS 1,0X6,5X150	2749630000	F.25						
REMOVAL TOOL CM 20	1866740000	D.44	SDIS 1,0X6,5X150	2749640000	F.21						
REMOVAL TOOL CM 3	1866710000	D.44	SDIT SLIM T10 X 100	2749700000	F.21						
REMOVAL TOOL CM 5	1866720000	D.44	SDIT SLIM T15 X 100	2749710000	F.21						
REMOVAL TOOL HD	1866730000	D.44	SDIT SLIM T20 X 100	2749720000	F.21						
REMOVAL TOOL HE	1866750000	D.44	SDIT SLIM T25 X 125	2749730000	F.21						
RZ 160	9046360000	E.6	SDIT SLIM T30 X 150	2749740000	F.21						
S			SDIT T9 X 60	2750040000	F.26						
SCHA CST	9032060000	C.14	SDIT T9 X 60	2750050000	F.26						
SCHRAUBENDREHER CST	9005720000	C.15	SDIT T12 X 60	2750150000	F.26						
SCISSOR 2 K	9918230000	B.18	SDK EL P20 X 60 PICO	2750120000	F.32						
SCISSORS KEVLAR	1208910000	B.19	SDK EL P21 X 60 PICO	2750130000	F.32						
SCREWWTY M12 KO 0 SD	1900100000	F.17	SDK EL PH0 X 60	2749400000	F.29						
SCREWWTY M12 KO 0 SD	1900100000	F.17	SDK EL PH1 X 80	2749410000	F.29						
SCREWWTY SET	1910000000	F.17	SDK EL PH2 X 100	2749420000	F.29						
SCREWWTY SET-DM	1920000000	F.17	SDK EL PH3 X 150	2749430000	F.29						
SCREWWTY-M2	1900000000	F.17	SDK EL PH4 X 100	2749440000	F.29						
SCREWWTY-M2 F	1900020000	F.17	SDK EL PH5 X 100	2749450000	F.29						
SCREWWTY-M8 F-DM	1900030000	F.17	SDQ T HANDLE T15	27498320000	F.35						
SCREWWTY-M12 F-DM	1900021000	F.17	SDQ T HANDLE T20	27498330000	F.35						
SCREWWTY-M12-DM	1900010000	F.17	SDQ T HANDLE T25	27498340000	F.35						
SCREWWTY-M8 F-DM	1900031000	F.17	SDQ T HANDLE T27	27498350000	F.35						
SCREWWTY-M8-DM	1900010000	F.17	SDQ T HANDLE HEX 4	27498290000	F.35	TEMPHASER	9427300000	G.11			
SCREWWTY-M8	1900010000	F.17	SDQ T HANDLE HEX 5	27498300000	F.35	TH-S 9-40	9008880000	F.34			
SCREWWTY-M8 F	1900030000	F.17	SDQ T HANDLE HEX 6	27498310000	F.35	TOOL BAG SD MECHANIK	2936980000	H.34			
SCREWWTY-M12 F-DM	1900021000	F.17	SDQ T HANDLE T15	27498320000	F.35	TOOL BAG SDI BASIC	2936990000	H.33			
SCREWWTY-M12-DM	1900010000	F.17	SDQ T HANDLE T20	27498330000	F.35	TOOL BAG SDI ELECTRIC PREMIUM	2937000000	H.33			
SCREWWTY-M8 F-DM	1900031000	F.17	SDQ T HANDLE T25	27498340000	F.35	TOOL BAG SDI ELECTRIC SLIM	2937010000	H.34			
SCREWWTY-M8-DM											

Type	Order No.	Page
VSTI/0,5-1,0	1491550000	J.20
VSTI/1,5-2,5	1491560000	J.20
VSTI/4,0-6,0	1491570000	J.20
VSTN-M0,5-0,75	1497330000	K.15
VSTN-M1/1,5	1497340000	K.15
VSTN-/10	1497130000	K.15
VSTN-/120	1494780000	K.15
VSTN-/150	1497380000	K.15
VSTN-/16	1497140000	K.15
VSTN-/185	1497390000	K.15
VSTN-/2,5	1497350000	K.15
VSTN-/240	1497400000	K.15
VSTN-/25	1494730000	K.15
VSTN-/35	1494740000	K.15
VSTN-/4	1497370000	K.15
VSTN-/50	1494750000	K.15
VSTN-/6	1494720000	K.15
VSTN-/70	1494760000	K.15
VSTN-/95	1494770000	K.15
VSTN/0,1-0,5	1492980000	K.27
VSTN/0,5-1	1492990000	K.27
VSTN/1,5-2,5	1493010000	K.27
VSTN/10	1493030000	K.27
VSTN/120	1493110000	K.27
VSTN/150	1493120000	K.27
VSTN/16	1493040000	K.27
VSTN/25	1493050000	K.27
VSTN/35	1493060000	K.27
VSTN/4-6	1493020000	K.27
VSTN/50	1493070000	K.27
VSTN/70	1493080000	K.27
VSTN/95	1493090000	K.27
VSTV/0,5-1,0	1491770000	J.23
VSTV/1,5-2,5	1491780000	J.23
VT	9918950000	G.8
VT CL	2436600000	G.15
VT COMBI PRO	9918860000	G.7
VT CTB	9918970000	G.8
VT CTL	2436900000	G.16
VT DIGI PRO	9918870000	G.6
VT LCL	2436670000	G.15
VT M	2436680000	G.16
VT MASTER	9918880000	G.7

**W**

WAW 1 NEUTRAL	9004500000	B.8
WAW 2	9004510000	B.8
WB 1 SK 2,5	2506050000	F.14
WB 1 SK 3	2506060000	F.14
WB 1 SK 4	2506070000	F.14
WB 1 SK 5	2506080000	F.14
WB 1 T10	2506060000	F.14
WB 1 T15	2506010000	F.14
WB 1 T20	2506020000	F.14
WB 1 VK 1	2506030000	F.14
WB 1 VK 2	2506040000	F.14
WB IK SLPH1	2433210000	F.14
WB IK SLPH2	2433220000	F.14
WB IK SLPZ1	2433230000	F.14
WB IK SLPZ2	2433240000	F.14
WB SI SL 0,8X4,0	2433190000	F.14
WB SI SL 0,4X2,5	2433160000	F.14
WB SI SL 0,5X3,0	2433170000	F.14
WB SI SL 0,6X3,5	2433180000	F.14
WB SI SL 1,0X5,5	2433200000	F.14
WF PLATE 1	3064930000	L.11
WF PLATE 2	3064940000	L.11
WF PLATE 3	3064950000	L.11
WIRE FEEDER	3064910000	L.11
WIRE FEEDER COIL	3064920000	L.11
WIRE PROCESSING CENTER	2634120000	L.11
WIRE PROCESSING CENTER 115V	2728490000	L.11
WIRE PROCESSING CENTER FEEDER	2816420000	L.11
WIRE PROCESSING CENTER FEEDER 115V	2816430000	L.11
WK 1/4 C6,3 E6,3	9202510000	F.13
WK1 SLIM BIT	2489300000	F.14
WK K PH0	9918570000	F.13
WK K PH1	9918580000	F.13
WK K PH2	9918590000	F.13
WK K PZ0	9918600000	F.13
WK K PZ1	9918610000	F.13
WK K PZ2	9918620000	F.13
WK S 0,4X2,5	9918520000	F.13
WK S 0,5X3,0	9918530000	F.13
WK S 0,6X3,5	9918540000	F.13
WK S 0,8X4,0	9918550000	F.13
WK S 1,0X5,5	9918560000	F.13
WK1/4(SCREWWTY)	1862200000	F.17
WPC BUNDLER	2901940000	I.11
WPC CABINET	2883890000	I.11
WPC DISPLAY	2883900000	I.11
WPC FEEDING	2901930000	I.11
WPC FEEDING	2901930000	I.11
WPC GFSN	2666400000	I.11
WPC KBZF C	3008340000	I.11
WPC WAGON	2634140000	I.11
WPC WAGON 115V	2728480000	I.11
WPZ 250	2886220000	E.8
WSM TOOL AUTOMATIK	1774470000	D.46

Type	Order No.	Page
WSM TOOL MANUELL	1774480000	D.47
<b>Z</b>		
ZH-BOX 0,5-2,5QMM	9025390000	J.14
ZUB MULTI 1037	9205460000	G.12
ZUB MULTI 1037	9205460000	G.13
ZUB MULTIMETER	9205270000	G.12
ZUB MULTIMETER	9205270000	G.13
ZUB SLICER N016-35	9201430000	C.17
ZUB TEMPHASER	9205260000	G.11
ZUB TEMPHASER	9205260000	G.13

Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page
<b>01200000000</b>			0690700000 H0,5/14 OR	J.4		1345330000 TOP CASE	H.20		1491750000 VFSKH/4,0-6,0/638	J.21	
0124300000 H16,0/15	J.12		1345330000 TOP CASE	H.21		1491760000 VFSKH/4,0-6,0/9512	J.21				
0124400000 H25,0/15	J.12		1345330000 TOP CASE	H.22		1491770000 VSTV/0,5-1,0	J.23				
0124700000 H6,0/15	J.12		<b>10400000000</b>			1491780000 VSTV/1,5-2,5	J.23				
0124800000 H10,0/15	J.12		1044080000 HÜLSE REMOVAL TOOL CM 3	D.44		1491790000 FSKI/0,5-1,0/288	J.23				
<b>01800000000</b>			1044090000 HÜLSE REMOVAL TOOL CM 5	D.44		1491800000 FSKI/0,5-1,0/488	J.23				
0186100000 H2,5/12	J.12		1044100000 HÜLSE REMOVAL TOOL HD	D.44		1491820000 FSKI/0,5-1,0/638	J.23				
0186500000 H1,5/10	J.12		<b>10700000000</b>			1491830000 FSKI/1,5-2,5/638	J.23				
<b>01900000000</b>			1076980000 H0,5/18 OR	J.4		1491840000 FSKI/4,0-6,0/638	J.23				
0191900000 H6,0/12	J.12		1076990000 H0,5/18D W	J.4		1491850000 FSKI/1,5-2,5/488	J.23				
<b>02400000000</b>			1077010000 CTF 63 ZERT	D.18		1491860000 VFSKHW/0,5-1,0/285	J.22				
0244100000 H4,0/12	J.12		<b>11100000000</b>			1491870000 VFSKHW/0,5-1,0/288	J.22				
<b>02800000000</b>			1121740000 PS_ZQV	G.13		1491880000 VFSKHW/0,5-1,0/485	J.22				
0282600000 H0,5/6	J.12		<b>11300000000</b>			1491890000 VFSKHW/0,5-1,0/488	J.22				
0282700000 H0,75/6	J.12		1161710000 PS_ZQV_SET	G.13		1491900000 VRSHV/0,5-1,0/638	J.22				
0282800000 H1,0/10	J.12		1190300000 ERME 10° SPX 4	C.4		1491920000 VRSHV/1,5-2,5/485	J.22				
0282900000 H10,0/12	J.12		1190400000 ERME 16° SPX 4	C.4		1491930000 VRSHV/1,5-2,5/488	J.22				
<b>03100000000</b>			1137530000 VKSW	B.10		1491940000 VFSKHW/0,5-1,0/638	J.22				
0317000000 H25,0/30 BR	J.4		1139070000 H0,34/15 ZHTK	J.7		1491950000 VFSKHW/4,0-6,0/638	J.22				
0317100000 H25,0/36 BR	J.4		<b>11500000000</b>			1491960000 VRSHV/0,5-1,0/488	J.24				
0317200000 H35,0/30 BE	J.4		1157820000 KT 14	B.5		1491970000 VRSHV/1,5-2,5	J.24				
0317300000 H35,0/39 BE	J.4		1157830000 KT 22	B.5		1492010000 VRSHV/4,0-6,0	J.24				
<b>03600000000</b>			<b>11900000000</b>			1492020000 VRSHV/1,5-2,5	J.25				
0368900000 H35,0/18	J.12		1190490000 MULTI-STRIPAX PV	C.10		1492030000 VRSHV/1,5-2,5	J.25				
<b>03700000000</b>			<b>12000000000</b>			1492040000 VRST/1,5-2,5	J.25				
0372600000 H1,0/6	J.12		1204280000 AIE MULTI-STRIPAX PV	C.11		1492050000 VRST/1,5-2,5	J.25				
0372700000 H1,5/7	J.12		1208870000 HTX-E-POF	D.25		1492060000 VRST/4,0-6,0	J.25				
0373000000 H2,5/7	J.12		1208880000 MULTI-STRIPAX IE-POF	C.10		1492070000 VRST/4,0-6,0	J.25				
0373100000 H4,0/9	J.12		1208910000 SCISSORS KEVLAR	B.19		1492080000 VRST/1,5-2,5	J.25				
0375200000 H16,0/18	J.12		1208930000 TOOL SETTE IE-POF	H.40		1492090000 KOI-M2/-0,5	J.17				
0375300000 H25,0/18	J.12		<b>12100000000</b>			1492100000 KOI-M2/-0,5	J.17				
0379300000 H10,0/18	J.12		1212770000 AIE MULTI-STRIPAX POF	C.11		1492110000 KOI-M3/-0,5	J.17				
<b>04000000000</b>			1216230000 HBT 6,0,-4 GE	J.26		1492120000 KOI-M4/-0,5	J.17				
0407900000 IS 6 DIN 6911	F.36		1222870000 CTF PV WM4	D.26		1492130000 KOI-M5/-1	J.17				
0409500000 H0,5/12 OR	J.4		<b>12300000000</b>			1492140000 KOI-M10/-1	J.17				
0409600000 H0,75/12 W	J.4		1233330000 HBT 2,5,-4,6 BL	J.26		1492150000 KOI-M2/-1	J.17				
0409700000 H1,0/12 GE	J.4		1233340000 HBT 1,5,-4,6 RT	J.26		1492160000 KOI-M2,5/-1	J.17				
<b>04400000000</b>			<b>12400000000</b>			1492170000 KOI-M3/-1	J.17				
0444200000 H50,0/36 OLV	J.4		1243790000 CRIMPFLX PZ3	I.24		1492180000 KOI-M3,5/-1	J.17				
<b>04600000000</b>			<b>12500000000</b>			1492190000 KOI-M4/S/-1	J.17				
0462900000 H0,75/14 W	J.4		1251270000 ERME VIKSW	B.10		1492200000 KOI-M5/S/-1	J.17				
0463000000 H1,0/14 GE	J.4		<b>12700000000</b>			1492210000 KOI-M5/S/1	J.17				
0463100000 H1,5/14 R	J.4		1270320000 CTX CM 3,6 ZERT	D.22		1492220000 KOI-M5/1	J.17				
<b>04800000000</b>			<b>12900000000</b>			1492230000 KOI-M6/1	J.17				
0485100000 IS 4 DIN 6911	F.36		1292870000 CTN 25 DZ ZERT	D.21		1492240000 KOI-M8/-1	J.17				
<b>04900000000</b>			1292880000 CT 6 G ZERT	D.19		1492250000 KOI-M8/2	J.17				
0492500000 H16,0/12	J.12		1296000000 KABELBINDERZANGE RT-1	D.46		1492260000 KOI-M8/3	J.17				
<b>05300000000</b>			<b>13000000000</b>			1492270000 KOI-M10/2,5	J.17				
0533500000 H6,0/20 SW	J.4		1309580000 KOF CARRYLITE 80	H.43		1492280000 KOI-M12/2,5	J.17				
0534200000 H10,0/22 EB	J.4		<b>13100000000</b>			1492290000 KOI-M4/6	J.17				
<b>05400000000</b>			1312440000 HBT 1,5,-3,0 RT	J.26		1492300000 KOI-M5/6	J.17				
0542500000 H0,75/10	J.12		1312450000 HBT 2,5,-3,0 BL	J.26		1492310000 KOI-M6/6	J.17				
<b>05600000000</b>			1312470000 HBT 6,0,-3,0 GE	J.26		1492320000 KOI-M7/6	J.17				
0565600000 H1,5/24 R	J.4		1318510000 TSD 35/7,5/15	B.12		1492330000 KOI-M8/6	J.17				
0565700000 H6,0/26 SW	J.4		<b>13300000000</b>			1492340000 KOI-M9/6	J.17				
0565800000 H10,0/28 EB	J.4		1333100000 H2,5/14DS BL	J.10		1492350000 KOI-M10/6	J.17				
0565900000 H16,0/22 GN	J.4		<b>13400000000</b>			1492360000 KOI-M11/6	J.17				
0566000000 H16,0/28 GN	J.4		1345310000 TOP CASE INSTA	H.19		1492370000 KOI-M12/6	J.17				
0567300000 PZ 3	D.6		1345320000 TOP CASE PREMIUM	H.18		1492380000 KOI-M13/6	J.17				
0567300000 PZ 3	D.9		1345330000 TOP CASE	H.18		1492390000 KOI-M14/6	J.17				
0567300000 PZ 3	J.3		1345330000 TOP CASE	H.19		1492400000 KOI-M15/6	J.17				
<b>06300000000</b>			<b>06900000000</b>			1492410000 KOI-M16/6	J.17				
0635100000 H1,5/16 R	J.4		<b>13400000000</b>			1492420000 KOI-M17/6	J.17				

Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page
1492860000	VPLN/0,5-1,0	K.27	1493940000	KDN-M12/2,5	K.23	1495150000*	KRN-M6/-4	K.9	1496270000*	KWN-M6/-50 45	K.14
1492870000	VPLN/1,5-2,5	K.27	1493950000	KDN-M4/-6	K.23	1495170000*	KRN-M8/-4	K.9	1496280000	KWN-M8/-50 45	K.14
1492880000	VPLN/4-6,0	K.27	1493960000	KDN-M5/-6	K.23	1495180000*	KWN-M3/-0,75 90	K.12	1496290000	KWN-M10/-50 45	K.14
1492890000	VPLN/10	K.27	1493970000	KDN-M6/-6	K.23	1495190000*	KWN-M4/-0,75 90	K.12	1496300000	KWN-M12/-50 45	K.14
1492900000	VPLN/16	K.27	1493980000	KDN-M8/-6	K.23	1495200000*	KWN-M5/-0,75 90	K.12	1496310000	KWN-M8/-70 45	K.14
1492910000	VPLN/25	K.27	1493990000	KDN-M10/-6	K.23	1495210000*	KWN-M3/-1,5 90	K.12	1496320000	KWN-M10/-70 45	K.14
1492920000	VPLN/35	K.27	1494000000	KDN-M12/6	K.23	1495220000*	KWN-M4/-1,5 90	K.12	1496330000	KWN-M12/-70 45	K.14
1492930000	VPLN/50	K.27	1494010000	KDN-M4/-10	K.24	1495230000*	KWN-M5/-1,5 90	K.12	1496340000	KWN-M8/-95 45	K.14
1492940000	VPLN/70	K.27	1494020000	KDN-M5/-10	K.24	1495240000*	KWN-M6/-1,5 90	K.12	1496350000	KWN-M10/-95 45	K.14
1492950000	VPLN/95	K.27	1494030000	KDN-M6/-10	K.24	1495250000*	KWN-M4/-2,5 90	K.12	1496370000	KWN-M12/-95 45	K.14
1492960000	VPLN/120	K.27	1494040000	KDN-M8/-10	K.24	1495270000*	KWN-M5/-2,5 90	K.12	1496380000*	KWN-M16/-95 45	K.14
1492970000	VPLN/150	K.27	1494050000	KDN-M10/-10	K.24	1495280000*	KWN-M6/-2,5 90	K.12	1496390000	KWN-M8/120 45	K.14
1492980000	VSTN/0,1-0,5	K.27	1494060000	KDN-M12/10	K.24	1495290000*	KWN-M8/-2,5 90	K.12	1496400000	KWN-M10/120 45	K.14
1492990000	VSTN/0,5-1	K.27	1494070000	KDN-M5/-16	K.24	1495300000*	KWN-M4/-4 90	K.12	1496410000	KWN-M12/-120 45	K.14
1493010000	VSTN/1,5-2,5	K.27	1494080000	KDN-M6/-16	K.24	1495310000*	KWN-M5/-4 90	K.12	1496420000	KWN-M16/120 45	K.14
1493020000	VSTN/4-6	K.27	1494090000	KDN-M8/-16	K.24	1495320000*	KWN-M6/-4 90	K.12	1496430000*	KWN-M8/-150 45	K.14
1493030000	VSTN/10	K.27	1494100000	KDN-M10/-16	K.24	1495330000*	KWN-M8/-4 90	K.12	1496440000	KWN-M10/-150 45	K.14
1493040000	VSTN/16	K.27	1494110000	KDN-M12/-16	K.24	1495340000	KWN-M10/185 45	K.14	1496450000	KWN-M12/-150 45	K.14
1493050000	VSTN/25	K.27	1494120000	KDN-M5/25	K.24	1495350000	KWN-M12/185 45	K.14	1496470000	KWN-M16/150 45	K.14
1493060000	VSTN/35	K.27	1494130000	KDN-M6/25	K.24	1495370000	KWN-M16/185 45	K.14	1496480000*	KWN-M20/-150 45	K.14
1493070000	VSTN/50	K.27	1494140000	KDN-M8/25	K.24	1495380000	KWN-M20/185 45	K.14	1496490000	KRN-M6/25	K.9
1493080000	VSTN/70	K.27	1494150000	KDN-M10/25	K.24	1495400000	KWN-M12/240 45	K.14	1496500000	KRN-M8/25	K.9
1493090000	VSTN/95	K.27	1494160000	KDN-M12/25	K.24	1495410000	KWN-M16/240 45	K.14	1496510000	KRN-M10/-25	K.9
1493110000	VSTN/120	K.27	1494170000	KDN-M6/35	K.24	1495420000	KWN-M20/240 45	K.14	1496520000	KRN-M12/25	K.9
1493120000	VSTN/150	K.27	1494180000	KDN-M8/35	K.24	1495430000	KRN-M10/185	K.10	1496530000	KRN-M14/25	K.9
1493130000	KDN-M12/35	K.24	1494190000	KDN-M10/35	K.24	1495440000	KRN-M12/185	K.10	1496540000	KRN-M6/35	K.10
1493140000	KDN-M16/35	K.24	1494340000	KDN-M10/240 S	K.11	1495450000	KRN-M16/185	K.10	1496550000	KRN-M8/35	K.10
1493150000	KDN-M8/50	K.24	1494350000	KRN-M12/240 S	K.11	1495470000	KRN-M20/185	K.10	1496570000	KRN-M10/35	K.10
1493160000	KDN-M10/50	K.24	1494370000	KRN-M16/240 S	K.11	1495480000*	KRN-M8/240	K.10	1496580000	KRN-M12/35	K.10
1493170000	KDN-M12/50	K.24	1494380000*	KRN-M10/300 S	K.11	1495490000	KRN-M10/240	K.10	1496590000	KRN-M6/50	K.10
1493180000	KDN-M16/50	K.24	1494390000*	KRN-M12/300 S	K.11	1495500000	KRN-M12/240	K.10	1496600000	KRN-M8/50	K.10
1493190000	KDN-M6/70	K.24	1494400000*	KRN-M16/300 S	K.11	1495510000	KRN-M16/240	K.10	1496610000	KRN-M10/-50	K.10
1493210000	KDN-M8/70	K.24	1494410000	KDN-M6/120 S	K.11	1495520000	KRN-M20/240	K.10	1496620000	KRN-M12/50	K.10
1493220000	KDN-M10/70	K.24	1494420000	KRN-M8/120 S	K.11	1495530000*	KRN-M10/300	K.10	1496630000	KRN-M16/50	K.10
1493230000	KDN-M12/70	K.24	1494430000	KRN-M6/95 S	K.11	1495540000	KRN-M12/300	K.10	1496640000	KRN-M6/70	K.10
1493240000	KDN-M16/70	K.24	1494440000	KRN-M6/150 S	K.11	1495550000	KRN-M16/300	K.10	1496650000	KRN-M8/70	K.10
1493250000	KDN-M20/70	K.24	1494450000	KWN-M10/120 90	K.13	1495570000	KRN-M12/70	K.10	1496670000	KRN-M10/70	K.10
1493260000	KDN-M8/95	K.24	1494470000	KWN-M12/120 90	K.13	1495580000	KRN-M16/70	K.10	1496680000	KWPN-M20/150 90	K.19
1493270000	KDN-M10/95	K.24	1494480000	KWN-M16/120 90	K.13	1495590000	KRN-M20/70	K.10	1496690000	KWPN-M10/-185 90	K.19
1493280000	KDN-M12/95	K.24	1494490000	KWN-M8/150 90	K.13	1495600000	KRN-M8/95	K.10	1496700000	KWPN-M12/185 90	K.19
1493290000	KDN-M16/95	K.24	1494500000	KWN-M10/150 90	K.13	1495610000	KRN-M10/-95	K.10	1496710000	KWPN-M16/185 90	K.19
1493310000	KDN-M20/95	K.24	1494510000	KWN-M12/150 90	K.13	1495620000	KRN-M12/-95	K.10	1496720000	KWPN-M20/-185 90	K.19
1493320000	KDN-M8/120	K.24	1494520000	KWN-M16/150 90	K.13	1495630000	KRN-M16/-95	K.10	1496730000	KWPN-M12/240 90	K.19
1493330000	KDN-M10/120	K.24	1494530000	KWN-M20/150 90	K.13	1495640000	KRN-M20/-95	K.10	1496740000	KWPN-M16/240 90	K.19
1493340000	KDN-M12/120	K.24	1494540000	KWN-M10/185 90	K.13	1495650000	KRN-M10/120	K.10	1496750000	KWPN-M20/240 90	K.19
1493350000	KDN-M16/120	K.24	1494550000	KWN-M12/185 90	K.13	1495670000	KRN-M12/120	K.10	1496770000	KWPN-M12/300 90	K.19
1493360000	KDN-M20/120	K.24	1494570000	KWN-M16/185 90	K.13	1495680000	KRN-M16/120	K.10	1496780000	KWPN-M16/300 90	K.19
1493370000	KDN-M10/150	K.24	1494580000	KWN-M20/185 90	K.13	1495690000	KRN-M20/120	K.10	1496790000	KWPN-M20/-300 90	K.19
1493380000	KDN-M12/150	K.24	1494590000	KWN-M16/200 90	K.13	1495700000	KRN-M8/150	K.10	1496800000	KWPN-M8/185 90	K.19
1493390000	KDN-M16/150	K.24	1494610000	KWN-M12/240 90	K.13	1495710000	KRN-M10/150	K.10	1496810000	KWN-M5/10 45	K.14
1493400000	KDN-M20/150	K.24	1494620000	KWN-M16/240 90	K.13	1495720000	KRN-M12/-150	K.10	1496820000	KWN-M10/185 90	K.19
1493420000	KDN-M10/185	K.24	1494630000	KWN-M20/240 90	K.13	1495730000	KRN-M16/150	K.10	1496830000	KWN-M8/10 45	K.14
1493430000	KDN-M12/185	K.24	1494640000	KWN-M14/35 90	K.12	1495740000	KRN-M20/150	K.10	1496840000*	KWN-M10/-10 45	K.14
1493440000	KDN-M16/185	K.24	1494650000	KWN-M14/50 90	K.12	1495750000	KRN-M14/-50	K.10	1496850000	KWN-M5/18 45	K.14
1493450000	KDN-M20/185	K.24	1494660000	KWN-M14/70 90	K.12	1495760000	KRN-M14/70	K.10	1496870000	KWN-M6/18 45	K.14
1493460000	KDN-M10/240	K.24	1494670000	KWN-M14/95 90	K.12	1495780000	KRN-M14/-95	K.10	1496880000	KWN-M8/16 45	K.14
1493470000	KDN-M12/240	K.24	1494680000	KWN-M16/95 90	K.12	1495790000	KRN-M16/95	K.10	1496890000	KWN-M10/16 45	K.14
1493480000	KDN-M16/240	K.24	1494690000	KWN-M16/35 90	K.12	1495800000	KRN-M14/120	K.10	1496900000	KRN-M4/10	K.9
1493490000	KDN-M16/25	K.24	1494710000	KWN-M20/50 90	K.13	1495810000	KRN-M14/-150	K.10	1496910000	KRN-M5/10	K.9
1493510000	KDN-M6/50	K.24	1494720000	KVN-S/6	K.13	1495820000	KRN-M6/-95	K.12	1496920000	KRN-M6/10	K.9
1493520000	KDN-M20/35	K.24	1494730000	VSTN/25	K.15	1495830000	KRN-M5/25	K.9	1496930000	KRN-M8/10	K.9
1493530000	KDN-M20/50	K.24	1494740000	VSTN/-35	K.15	1495840000	KRN-M20/50	K.10	1496940000	KRN-M10/10	K.9
1493540000	KDN-M3/1	K.25	1494750000	VSTN/-50	K.15	1495850000	KRN-M6/25 90	K.12	1496950000	KRN-M12/10	K.9
1493550000	KONG-M3,5/1	K.25	1494760000	VSTN/-70	K.15	1495860000	KRN-M8/25 90	K.12	1496970000	KRN-M5/16	K.9
1493560000	KONG-M4/S/1	K.25	1494770000	VSTN/-95	K.15	1495880000	KWN-M10/25 90	K.12	1496980000	KRN-M6/16	K.9
1493570000	KONG-M4/1	K.25	1494780000	VSTN/-120	K.15	1495890000	KWN-M12/25 90	K.12	1496990000	KRN-M8/16	K.9
1493580000	KONG-M5/1	K.25	1494790000	KRN-M6/35 S	K.11	1495900000	KWN-M14/25 90	K.12	1497000000	KRN-M10/16	K.9
1493590000	KONG-M6/1	K.25	1494810000*	KRN-M8/35 S	K.11	1495910000	KWN-M6/35 90	K.12	1497010000	KRN-M12/16	K.9
1493600000	KONG-M3/2,5	K.25	1494820000	KRN-M6/50 S	K.11	1495920000	KWN-M8/35 90	K.12	1497020000	KWN-M5/10 90	K.12
1493610000	KONG-M3,5/2,5	K.25	1494830000	KRN-M8/50 S	K.11	1495930000	KWN-M10/35 90	K.12	1497030000	KWN-M6/10 90	K.12
1493620000	KONG-M4/S/2,5	K.25	1494840000	KRN-M10/50 S	K.11	1495940000	KWN-M12/35 90	K.12	1497040000	KWN-M8/10 90	K.12
1493630000	KONG-M4/2,5	K.25	1494850000	KRN-M6/70 S	K.11	1495950000	KWN-M6/50 90	K.13	1497050000	KWN-M10/10 90	K.12
1493640000	KONG-M6/2,5	K.25	1494860000	KRN-M8/70 S	K.11	1495970000	KWN-M8/50 90	K.13	1497070000		

Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page	
1497380000	VSTN/-150	K.15	1498530000	KP-M14-/240	K.18		<b>15100000000</b>			2433170000	WB SI SL 0.5X3.0	F.14
1497390000	VSTN/-185	K.15	1498540000	KP-M8-/185	K.18				2433180000	WB SI SL 0.6X3.5	F.14	
1497400000	VSTN/-240	K.15	1498550000	KP-M14-/300	K.18	1512780000	STRIPAX ULTIMATE XL	C.5	2433190000	WB SI SL 0.8X4.0	F.14	
1497420000	KWPN-M6-/10 90	K.19	1498560000	KP-M14-/70	K.17	1512790000	ERME SPX UL XL	C.5	2433200000	WB SI SL 1.0X5.5	F.14	
1497430000	KWPN-M8-/10 90	K.19	1498570000	KP-M14-/50	K.17		<b>15200000000</b>			2433210000	WB IK SL PH1	F.14
1497440000	KWPN-M6-/16 90	K.19	1498580000	KP-M14-/150	K.18				2433220000	WB IK SL PH2	F.14	
1497450000	KWPN-M8-/16 90	K.19	1498590000	KP-M14-/185	K.18				2433230000	WB IK SL P21	F.14	
1497470000	KWPN-M10-/16 90	K.19	1498610000	VPN/-6	K.20	1527230000	PZ 6 ROTO L ZERT	D.11	2433240000	WB IK SL P22	F.14	
1497480000	KWPN-M12-/16 90	K.19	1498620000	VPN/-10	K.20		<b>15300000000</b>			2436660000	VT CL	G.15
1497490000	KWPN-M6-/25 90	K.19	1498630000	VPN/-16	K.20	1534740000	POWERSTRIPPER AM 12	I.20	2436670000	VT CL	G.15	
1497510000	KWPN-M8-/25 90	K.19	1498640000	VPN/-25	K.20				2436680000	VT M	G.16	
1497520000	KWPN-M10-/25 90	K.19	1498650000	VPN/-35	K.20				2436690000	VT CTL	G.16	
1497530000	KWPN-M12-/25 90	K.19	1498660000	VPN/-50	K.20		<b>15400000000</b>			<b>24400000000</b>		
1497540000	KWPN-M6-/35 90	K.19	1498670000	VPN/-70	K.20	1542250000	CRIMPSET PZ 10 HEX	H.36	2443370000	CRIMP FIX MAGAZIN	I.23	
1497550000	KWPN-M8-/35 90	K.19	1498680000	VPN/-95	K.20	1542260000	CRIMPSET PZ 10 HEX D	H.36		<b>24500000000</b>		
1497570000	KWPN-M10-/35 90	K.19	1498690000	VPN/-120	K.20	1542270000	CRIMPSET PZ 10 HEX T	H.36	2453810000	E PG 60	D.38	
1497580000	KWPN-M12-/35 90	K.19	1498710000	VPN/-150	K.20	1542280000	CRIMPSET PZ 10 SOR	H.36	2453820000	H PG 60	D.38	
1497590000	KWPN-M8-/50 90	K.19	1498720000	VPN/-185	K.20	1542290000	CRIMPSET PZ 10 SOR D	H.36	2453830000	E PG CUT 40	D.33	
1497610000	KWPN-M10-/50 90	K.19	1498730000	VPN/-240	K.20		<b>15500000000</b>			<b>24600000000</b>		
1497620000	KWPN-M12-/50 90	K.19	1498740000	VPN/-300	K.20	1542310000	CRIMPSET PZ 10 SOR T	H.36	2469380000	ES E PG/H PG 60 WM 6	D.39	
1497630000	KWPN-M16-/50 90	K.19				1542350000	KOS-PG42	B.16	2469450000	ES E PG/H PG 60 WM 10	D.39	
1497640000	KWPN-M8-/70 90	K.19				1542380000	KOS-PG48	B.16	2469550000	ES E PG/H PG 60 WM 16	D.39	
1497650000	KWPN-M10-/70 90	K.19				1542410000	KOS-M63	B.14	2469570000	ES E PG/H PG 60 WM 25	D.39	
1497660000	KWPN-M12-/70 90	K.19				1542440000	KOS-M63	B.16	2469580000	ES E PG/H PG 60 WM 35	D.39	
1497680000	KWPN-M16-/70 90	K.19				1542480000	KOS-M50	B.14	2469590000	ES E PG/H PG 60 WM 50	D.39	
1497690000	KWPN-M8-/95 90	K.19				1542481000	KOS-M50	B.16	2469600000	ES E PG/H PG 60 WM 70	D.39	
1497710000	KWPN-M10-/95 90	K.19				1542500000	ES E PG/H PG 60 WM 95	D.39	2469610000	ES E PG/H PG 60 WM 95	D.39	
1497720000	KWPN-M12-/95 90	K.19				1542520000	ES E PG/H PG 60 WM 120	D.39	2469620000	ES E PG/H PG 60 WM 150	D.39	
1497730000	KWPN-M16-/95 90	K.19				1542540000	ES E PG/H PG 60 WM 185	D.39	2469630000	ES E PG/H PG 60 WM 240	D.39	
1497750000	KWPN-M10-/120 90	K.19				1542560000	ES E PG/H PG 60 WM 300	D.39	2469640000	ES E PG/H PG 60 WM 240	D.39	
1497760000	KWPN-M12-/120 90	K.19				1542580000	ES E PG/H PG 60 WM 300	D.39	2469650000	ES E PG/H PG 60 WM 300	D.39	
1497770000	KWPN-M16-/120 90	K.19				1542600000	ES E PG/H PG 60 WM 300	D.39		<b>24800000000</b>		
1497780000	KWPN-M20-/120 90	K.19				1542620000	ES E PG/H PG 60 WM 300	D.39	2489300000	WK I SLIM BIT	F.14	
1497790000	KWPN-M8-/150 90	K.19				1542640000	ES E PG/H PG 60 WM 300	D.39		<b>25000000000</b>		
1497810000	KWPN-M10-/150 90	K.19				1542660000	ES E PG/H PG 60 WM 300	D.39	2505150000	ES E PG/H PG 60 HEX 6	D.39	
1497820000	KWPN-M12-/150 90	K.19				1542680000	ES E PG/H PG 60 WM 300	D.39	2505160000	ES E PG/H PG 60 HEX 10	D.39	
1497830000	KWPN-M16-/150 90	K.19				1542700000	ES E PG/H PG 60 WM 300	D.39	2505170000	ES E PG/H PG 60 HEX 16	D.39	
1497840000	KP-M5-/6	K.17				1542720000	ES E PG/H PG 60 WM 300	D.39	2505180000	ES E PG/H PG 60 HEX 25	D.39	
1497850000	KP-M6-/6	K.17				1542740000	ES E PG/H PG 60 WM 300	D.39	2505190000	ES E PG/H PG 60 HEX 35	D.39	
1497860000	KP-M8-/6	K.17				1542760000	ES E PG/H PG 60 WM 300	D.39	2505200000	ES E PG/H PG 60 HEX 50	D.39	
1497870000	KP-M5-/10	K.17				1542780000	ES E PG/H PG 60 WM 300	D.39	2505210000	ES E PG/H PG 60 HEX 70	D.39	
1497880000	KP-M6-/10	K.17				1542800000	ES E PG/H PG 60 WM 300	D.39	2505220000	ES E PG/H PG 60 HEX 95	D.39	
1497890000	KP-M8-/10	K.17				1542820000	ES E PG/H PG 60 WM 300	D.39	2505230000	ES E PG/H PG 60 HEX 120	D.39	
1497910000	KP-M10-/10	K.17				1542840000	ES E PG/H PG 60 WM 300	D.39	2505240000	ES E PG/H PG 60 HEX 150	D.39	
1497920000	KP-M5-/16	K.17				1542860000	ES E PG/H PG 60 WM 300	D.39	2505250000	ES E PG/H PG 60 HEX 185	D.39	
1497930000	KP-M6-/16	K.17				1542880000	ES E PG/H PG 60 WM 300	D.39	2505260000	ES E PG/H PG 60 HEX 240	D.39	
1497940000	KP-M8-/16	K.17				1542900000	ES E PG/H PG 60 WM 300	D.39	2505270000	ES E PG/H PG 60 HEX 300	D.39	
1497950000	KP-M10-/16	K.17				1542920000	ES E PG/H PG 60 WM 300	D.39	2505280000	ES E PG/H PG 60 DIN 6	D.39	
1497960000	KP-M12-/16	K.17				1542940000	ES E PG/H PG 60 WM 300	D.39	2505290000	ES E PG/H PG 60 DIN 10	D.39	
1497970000	KP-M6-/25	K.17				1542960000	ES E PG/H PG 60 WM 300	D.39	2505300000	ES E PG/H PG 60 DIN 16	D.39	
1497980000	KP-M8-/25	K.17				1542980000	ES E PG/H PG 60 WM 300	D.39	2505310000	ES E PG/H PG 60 DIN 25	D.39	
1497990000	KP-M10-/25	K.17				1543000000	ES E PG/H PG 60 WM 300	D.39	2505320000	ES E PG/H PG 60 DIN 35	D.39	
1498000000	KP-M12-/25	K.17				1543020000	ES E PG/H PG 60 WM 300	D.39	2505330000	ES E PG/H PG 60 DIN 50	D.39	
1498010000	KP-M16-/25	K.17				1543040000	ES E PG/H PG 60 WM 70	D.39	2505340000	ES E PG/H PG 60 DIN 70	D.39	
1498020000	KP-M6-/35	K.17				1543060000	ES E PG/H PG 60 WM 100	D.39	2505350000	ES E PG/H PG 60 DIN 95	D.39	
1498030000	KP-M8-/35	K.17				1543080000	ES E PG/H PG 60 WM 120	D.39	2505360000	ES E PG/H PG 60 DIN 120	D.39	
1498040000	KP-M10-/35	K.17				1543100000	ES E PG/H PG 60 WM 150	D.39	2506010000	WB I T10	F.14	
1498050000	KP-M12-/35	K.17				1543120000	ES E PG/H PG 60 WM 200	D.39	2506020000	WB I T11	F.14	
1498060000	KP-M16-/35	K.17				1543140000	ES E PG/H PG 60 WM 300	D.39	2506030000	WB I T20	F.14	
1498070000	KP-M8-/50	K.17				1543160000	ES E PG/H PG 60 WM 300	D.39	2506040000	WB I VK 1	F.14	
1498080000	KP-M10-/50	K.17				1543180000	ES E PG/H PG 60 WM 300	D.39	2506050000	WB I VK 2	F.14	
1498090000	KP-M12-/50	K.17				1543200000	ES E PG/H PG 60 WM 300	D.39	2506060000	WB I SK 3	F.14	
1498100000	KP-M16-/50	K.17				1543220000	ES E PG/H PG 60 WM 300	D.39	2506070000	WB I SK 4	F.14	
1498120000	KP-M20-/50	K.17				1543240000	ES E PG/H PG 60 WM 300	D.39	2506080000	WB I SK 5	F.14	
1498130000	KP-M8-/70	K.17				1543260000	ES E PG/H PG 60 WM 300	D.39		<b>25200000000</b>		
1498140000	KP-M10-/70	K.17				1543280000	ES E PG/H PG 60 WM 300	D.39	2528550000	H0,5/14S OR BD GSP	J.10	
1498150000	KP-M12-/70	K.17				1543300000	ES E PG/H PG 60 WM 300	D.39	2528560000	H0,75/14S BD GSP	J.10	
1498160000	KP-M16-/70	K.17				1543320000	ES E PG/H PG 60 WM 300	D.39	2528570000	H1,0/14S GE BD GSP	J.10	
1498170000	KP-M12-/95	K.17				1543340000	ES E PG/H PG 60 WM 300	D.39	2528580000	H1,5/14S R BD GSP	J.10	
1498180000	KP-M8-/95	K.17				1543360000	ES E PG/H PG 60 WM 300	D.39	2528590000	H0,5/14DS W BD GSP	J.10	
1498190000	KP-M10-/95	K.17				1543380000	ES E PG/H PG 60 WM 300	D.39	2528600000	H0,75/14DS GR BD GSP	J.10	
1498210000	KP-M12-/95	K.17				1543400000	ES E PG/H PG 60 WM 300	D.39	2528610000	H1,0/14DS R BD GSP	J.10	
1498220000	KP-M16-/95	K.17				1543420000	ES E PG/H PG 60 WM 300	D.39	2528620000	H1,5/14DS SW BD GSP	J.10	
1498230000	KP-M20-/95	K.17				1543440000	ES E PG/H PG 60 WM 300	D.39	2528630000	H0,75/14TS HB BD GSP	J.10	
1498240000	KP-M10-/120	K.18				1543460000	ES E PG/H PG 60 WM 300	D.39		<b>25400000000</b>		
1498250000	KP-M12-/120	K.18				1543480000	ES E PG/H PG 60 WM 300	D.39	2544760000	SKAI TASCHE	G.6	
1498270000	KP-M16-/120	K.18				1543500000	ES E PG/H PG 60 WM 300	D.39	2544760000	SKAI TASCHE	G.7	
1498280000	KP-M20-/120	K.18				1543520000	ES E PG/H PG 60 WM 300	D.39	2544760000	SKAI TASCHE	G.8	
1498290000	KP-M8-/150	K.18				1543540000	ES E PG/H PG 60 WM 300	D.39	2544760000	SKAI TASCHE	G.13	
1498310000	KP-M10-/150	K.18				1543560000	ES E PG/H PG 60 WM 300	D.39	2544810000	P BAG	H.29	
1498320000	KP-M12-/150	K.18				1543580000	ES E PG/H PG 60 WM 300	D.39	2544810000	P BAG	H.30	
1498330000	KP-M16-/150	K.										

Order No.	Type	Page
-----------	------	------

**2560000000**

2561430000 P BAG SET 1	H.29
2565720000 2POL TESTER ZUB	G.6
2565720000 2POL TESTER ZUB	G.7
2565720000 2POL TESTER ZUB	G.13

**2570000000**

2571480000 ERTE KLBC SPX 10	C.4
2571490000 ERTE KLBC SPX 16	C.4
2571500000 ERTE KLBC SPX UL	C.5
2571510000 ERTE KLBC SPX UL XL	C.5
2576620000 P BAG BIG	H.23
2576620000 P BAG BIG	H.24
2576620000 P BAG BIG	H.25
2576620000 P BAG BIG	H.26
2576620000 P BAG BIG	H.27
2576620000 P BAG BIG	H.28
2577810000 ES EPG 60/HPG AEH 25	D.39
2577820000 ES EPG 60 AEH 35	D.39
2577830000 ES EPG 60/HPG AEH 50	D.39
2577850000 ES EPG 60/HPG AEH 70	D.39
2577870000 ES EPG 60/HPG AEH 95	D.39
2577880000 ES EPG 60/HPG AEH 120	D.39
2577900000 ES EPG 60 AEH 150	D.39
2577930000 ES EPG 60 AEH 185	D.39
2577940000 ES EPG 60 ISO 10	D.39
2577950000 ES EPG 60 ISO 16	D.39
2578020000 KRN-M10/400	K.10
2578030000 KRN-M12/400	K.10
2578040000 KRN-M16/400	K.10
2578050000 KRN-M20/400	K.10
2578060000 ES APG60 WM 400	D.41
2579420000 P BAG SET 3	H.30
2579430000 P BAG SET 4	H.30
2579440000 P BAG SET 5	H.31
2579460000 P BAG SET 7	H.32

**2580000000**

2580000000 CRIMPFIX R VARIO	I.23
-----------------------------	------

**2600000000**

2602110000 P BAG XL SET 1	H.23
2602120000 P BAG XL SET 2	H.23
2602140000 P BAG XL SET 4	H.24
2602170000 P BAG XL SET 7	H.26
2602250000 PRO CASE CAB	H.22
2602270000 PRO CASE 16	H.20
2602280000 PRO CASE ELEC	H.21
2602290000 TOP CASE CAB	H.22
2602310000 TOP CASE 16	H.20
2602320000 TOP CASE ELEC	H.21
2604620000 H.0/16S R BD GSP	J.10
2604630000 H.0/5/16DS W BD GSP	J.10
2604640000 H.0/75/16S W BD GSP	J.10
2604650000 H.0/75/16DS GR BD GSP	J.10
2604660000 H.0/75/16TS HBL BD GSP	J.10
2604680000 H.1/0/16S GE BD GSP	J.10
2604690000 H.1/0/16DS R BD GSP	J.10
2604700000 H.1/5/16S R BD GSP	J.10
2604710000 H.1/5/16DS SW BD GSP	J.10

**2620000000**

2625720000 AM-X	C.13
-----------------	------

**2630000000**

2634120000 WIRE PROCESSING CENTER	I.11
2634140000 WPC WAGON	I.11
2634310000 POWERCRIMPER 6.0	I.21

**2660000000**

2664400000 WPC GFSN	I.11
---------------------	------

**2680000000**

2683640000 TOOL CHEST	H.5
2683650000 TC LORW	H.13
2683660000 TC BHLE	H.13
2683670000 TC ZUAL	H.13
2683680000 TC PRHA	H.13
2683690000 TC SDHA	H.13
2683700000 TC AFBH	H.13
2683720000 TC INL BIG 1	H.5
2683730000 TC INL BIG 1 EMPTY	H.5
2683740000 TC INL THIRD 1	H.6
2683750000 TC INL THIRD 1 EMPTY	H.6
2683760000 TC INL THIRD 2	H.6
2683770000 TC INL THIRD 2 EMPTY	H.6
2683780000 TC INL THIRD 3	H.7
2683790000 TC INL THIRD 3 EMPTY	H.7
2683800000 TC INL THIRD 4	H.7
2683810000 TC INL THIRD 4 EMPTY	H.7
2683820000 TC INL THIRD 5	H.8

Order No.	Type	Page
-----------	------	------

2683830000 TC INL THIRD 5 EMPTY	H.8
2683840000 TC INL THIRD 6	H.8
2683850000 TC INL THIRD 6 EMPTY	H.8
2683860000 TC INL THIRD 7	H.9
2683870000 TC INL THIRD 7 EMPTY	H.9
2683880000 TC INL THIRD 8	H.9
2683890000 TC INL THIRD 8 EMPTY	H.9
2683900000 TC INL THIRD 9	H.10
2683910000 TC INL THIRD 9 EMPTY	H.10
2709760000 TOOL CHEST SET	H.5

Order No.	Type	Page
-----------	------	------

2749630000 SDIS SLIM 1.0X5.12X	F.21
2749640000 SDIS SLIM 1.2X6.5X150	F.21
2749650000 SDK SLIM PH1 X 80	F.21
2749660000 SDK SLIM PH2 X 100	F.21
2749670000 SDK SLIM PZ1 X 80	F.21
2749680000 SDK SLIM PZ2 X 100	F.21
2749690000 SDIPM SLIM PZ2 X 100	F.21
2749700000 SDIT SLIM T10 X 100	F.21
2749710000 SDIT SLIM T15 X 100	F.21
2749720000 SDIT SLIM T20 X 100	F.21
2749730000 SDIT SLIM T25 X 125	F.21
2749740000 SDIT SLIM T30 X 150	F.21
2749750000 SDI SET S2.5-5.5/PH1/2	F.27
2749760000 SDI SET S2.5-5.5/PH1/2	F.27
2749770000 SDI SET S2.0-5.5	F.27
2749780000 SDIS 0.4X.0X60	F.25
2749790000 SDIS 0.4X.2.5X75	F.25
2749800000 SDIS 0.5X3.0X100	F.25
2749810000 SDIS 0.6X3.5X100	F.25
2749820000 SDIK PH0 X 60	F.25
2749830000 SDIK PH1 X 80	F.25
2749840000 SDIK PH2 X 100	F.25
2749850000 SDIK PH3 X 150	F.25
2749860000 SDIK PH4 X 175	F.25
2749870000 SDIK PH5 X 200	F.25
2749880000 SDIK PH6 X 250	F.25
2749890000 SDIK PH7 X 300	F.25
2749900000 SDIPM PZ1 X 80	F.25
2749910000 SDIPM PZ2 X 100	F.25
2749920000 SDIPM PZ3 X 150	F.25
2749930000 SDIPM PZ4 X 200	F.25
2749940000 SDIPM PZ5 X 250	F.25
2749950000 SDIPM PZ6 X 300	F.25
2749960000 SDIPM PZ7 X 350	F.25
2749970000 SDIPM PZ8 X 400	F.25
2749980000 SDIPM PZ9 X 450	F.25
2749990000 SDIZ 0.8X4.0X100	F.26
2750000000 SD OPEN	L.4

Order No.	Type	Page
-----------	------	------

2750010000 SDIT T9 X 60	F.26
2750020000 SDIR 1 X 80	F.26
2750030000 SDIR 2 X 100	F.26
2750040000 SDIT 18 X 60	F.26
2750050000 SDIT 18 X 60	F.26
2750060000 SD EL 0.3X1.5X40 PICO	F.32
2750070000 SD EL 0.4X2.0X60 PICO	F.32
2750080000 SD EL 0.4X2.5X75 PICO	F.32
2750090000 SD EL 0.5X3.0X75 PICO	F.32
2750100000 SD EL 0.6X3.5X100 PICO	F.32
2750110000 SD EL 0.8X4.0X100 PICO	F.32
2750120000 SDK EL PZ2 X 60 PICO	F.32
2750130000 SDK EL PZ2 X 80 PICO	F.32
2750140000 SDK EL PH0 X 60 PICO	F.32
2750150000 SDK EL PH1 X 80 PICO	F.32
2750160000 SDK EL PH1 X 80 P/PH0/1	F.32
2750180000 SD OPEN	L.4


Order No.	Type	Page
-----------	------	------

2750000000 SD OPEN	L.4
2750010000 SD OPEN	L.4
2750020000 SD OPEN	L.4
2750030000 SD OPEN	L.4
2750040000 SD OPEN	L.4
2750050000 SD OPEN	L.4
2750060000 SD OPEN	L.4
2750070000 SD OPEN	L.4
2750080000 SD OPEN	L.4
2750090000 SD OPEN	L.4
2750100000 SD OPEN	L.4
2750110000 SD OPEN	L.4
2750120000 SD OPEN	L.4
2750130000 SD OPEN	L.4
2750140000 SD OPEN	L.4
2750150000 SD OPEN	L.4
2750160000 SD OPEN	L.4
2750180000 SD OPEN	L.4
2750190000 SD OPEN	L.4
2750200000 SD OPEN	L.4
2750210000 SD OPEN	L.4
2750220000 SD OPEN	L.4
2750230000 SD OPEN	L.4
2750240000 SD OPEN	L.4
2750250000 SD OPEN	L.4
2750260000 SD OPEN	L.4
2750270000 SD OPEN	L.4
2750280000 SD OPEN	L.4
2750290000 SD OPEN	L.4
2750300000 SD OPEN	L.4
2750310000 SD OPEN	L.4
2750320000 SD OPEN	L.4
2750330000 SD OPEN	L.4
2750340000 SD OPEN	L.4
2750350000 SD OPEN	L.4
2750360000 SD OPEN	L.4
2750370000 SD OPEN	L.4
2750380000 SD OPEN	L.4
2750390000 SD OPEN	L.4
2750400000 SD OPEN	L.4
2750410000 SD OPEN	L.4
2750420000 SD OPEN	L.4
2750430000 SD OPEN	L.4
2750440000 SD OPEN	L.4
2750450000 SD OPEN	L.4
2750460000 SD OPEN	L.4
2750470000 SD OPEN	L.4
2750480000 SD OPEN	L.4
2750490000 SD OPEN	L.4
2750500000 SD OPEN	L.4
2750510000 SD OPEN	L.4
2750520000 SD OPEN	L.4
2750530000 SD OPEN	L.4
2750540000 SD OPEN	L.4
2750550000 SD OPEN	L.4
2750560000 SD OPEN	L.4
2750570000 SD OPEN	L.4
2750580000 SD OPEN	L.4
2750590000 SD OPEN	L.4
2750600000 SD OPEN	L.4
2750610000 SD OPEN	L.4
2750620000 SD OPEN	L.4
2750630000 SD OPEN	L.4
2750640000 SD OPEN	L.4
2750650000 SD OPEN	L.4
2750660000 SD OPEN	L.4
2750670000 SD OPEN	L.4
2750680000 SD OPEN	L.4
2750690000 SD OPEN	L.4
2750700000 SD OPEN	L.4
2750710000 SD OPEN	L.4
2750720000 SD OPEN	L.4
2750730000 SD OPEN	L.4
2750740000 SD OPEN	L.4
2750750000 SD OPEN	L.4
2750760000 SD OPEN	L.4
2750770000 SD OPEN	L.4
2750780000 SD OPEN	L.4
2750790000 SD OPEN	L.4
2750800000 SD OPEN	L.4
2750810000 SD OPEN	L.4
2750820000 SD OPEN	L.4
2750830000 SD OPEN	L.4
2750840000 SD OPEN	L.4
2750850000 SD OPEN	L.4
2750860000 SD OPEN	L.4
2750870000 SD OPEN	L.4
2750880000 SD OPEN</td	

Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page
2937000000 TOOL BAG SDI ELECTRIC PREMIUM	H.33	9004250000 H95,0/25	J.12	9011360000 HTX LWL	D.7	9019020000 H0,5/16D W	J.4				
2937010000 TOOL BAG SDI ELECTRIC SLIM	H.34	9004260000 H95,0/32	J.12	9011360000 HTX LWL	D.23	9019030000 H0,75/12D GR	J.4				
2937020000 BIT-BOX 11 TRX + IS	F.9	9004270000 H0,5/14 R BD	J.5	9011460000 PZ 6/5	D.6	9019040000 H0,75/14D GR	J.4				
2938110000 TC TFTHA VESA	H.13	9004280000 H0,5/14D W BD	J.5	9011460000 PZ 6/5	D.12	9019050000 H0,75/16D GR	J.4				
<b>29400000000</b>		9004290000 H0,75/14 W BD	J.5	9011460000 PZ 6/5	J.3	9019060000 H0,75/18D GR	J.4				
2941280000 TC INL THIRD 10 EMPTY	H.10	9004300000 H0,75/14D GR BD	J.5	9011990000 HTX 188	D.7	9019070000 H1,0/12D R	J.4				
2941290000 TC INL THIRD 11 EMPTY	H.11	9004310000 H0,75/14T HBL BD	J.5	9011990000 HTX 188	D.27	9019080000 H1,0/14D R	J.4				
2941310000 TC INL THIRD 12 EMPTY	H.11	9004320000 H1,0/14 GE BD	J.5	9012020000 HTG 58/59	D.7	9019100000 H1,0/16D R	J.4				
2941320000 TC INL THIRD 13 EMPTY	H.12	9004330000 H1,0/14D R BD	J.5	9012020000 HTG 58/59	D.27	9019110000 H1,0/18D R	J.4				
<b>29800000000</b>		9004340000 H1,5/14 R BD	J.5	9012400000 HTX 138	D.7	9019120000 H1,5/14D SW	J.4				
2984690000 H0,5/8	J.12	9004350000 H1,5/14D SW BD	J.5	9012400000 HTX 138	D.27	9019130000 H1,5/16D SW	J.4				
<b>29900000000</b>		9004360000 H2,5/14D BL BD	J.5	9012410000 HTG 174	D.7	9019140000 H1,5/18D SW	J.4				
2989340000 K740	B.6	9004370000 H2,5/14T GR BD	J.5	9012410000 HTG 174	D.27	9019150000 H1,5/24D SW	J.4				
2993500000 KT50	B.6	9004410000 H1,5/16 ZH R SV	J.8	9012500000 PZ 4	D.6	9019160000 H2,5/15D BL	J.4				
2994740000 RAILASSEMBLER + RAILCUTTER	I.5	9004420000 H1,5/16D ZH SW SV	J.8	9012500000 PZ 4	D.12	9019170000 H2,5/19D BL	J.4				
2994750000 RAILASSEMBLER + RAILCUTTER US VERSION	I.5	9004430000 H2,5/19D ZH BL SV	J.8	9012500000 PZ 4	J.3	9019180000 H2,5/25D BL	J.4				
2994760000 RAILCUTTER RETROFIT	I.5	9004440000 H0,5/14 ZH OR SV	J.8	9012600000 PZ 16	D.6	9019190000 H4,0/18D GR	J.4				
2994780000 RAILCUTTER STANDALONE US VERSION	I.5	9004500000 WAV 1 NEUTRAL	B.8	9012600000 PZ 16	D.14	9019200000 H4,0/20D GR	J.4				
<b>30000000000</b>		9004510000 WAV 2	B.8	9012600000 PZ 16	J.3	9019210000 H4,0/26D GR	J.4				
3008340000 WPC KBZF C	L.11	9004530000 DW RSV 1.6	D.44	9012640000 EINSATZPAAR PZ 16E	I.21	9019220000 H6,0/20D GE	J.4				
<b>30300000000</b>		9004560000 H0,5/145 D R	J.10	9013080000 HTF 48	D.7	9019230000 H6,0/26D GE	J.4				
3032890000 POWERCRIMPER VARIO	I.21	9004580000 H0,5/145 W S	J.10	9013080000 HTF 48	D.18	9019240000 H10,0/22D R	J.4				
<b>30400000000</b>		9004710000 H10,0/26D R ZH SV	J.8	9013090000 HTF 28	D.7	9019250000 H10,0/28D R	J.4				
3043810000 STORAGEBOX PCV	I.21	9004720000 H6,0/230 ZH GE SV	J.8	9013090000 HTF 28	D.18	9019260000 H16,0/22D BL	J.4				
<b>30600000000</b>		9004730000 H4,0/220 ZH GR SV	J.8	9013260000 HTF SUB-D	D.7	9019270000 H16,0/28D BL	J.4				
3064900000 ADAPTER PCV HTO	I.21	9004740000 H2,5/210 ZH BL SV	J.8	9013260000 HTF SUB-D	D.28	9019280000 H25,0/30D 16 GE	J.4				
3064910000 WIRE FEEDER	I.11	9004760000 H1,0/190 ZH R SV	J.8	9013400000 HTF 63	D.7	9019300000 H25,0/36D 6E	J.4				
3064920000 WIRE FEEDER COIL	I.11	9004770000 H0,75/16D ZH GR SV	J.8	9013550000 HTF RSV 12	D.6	9019310000 H35,0/30D 16 R	J.4				
3064930000 WF PLATE 1	I.11	9004780000 H0,5/140 ZH W SV	J.8	9013550000 HTF RSV 12	D.29	9019320000 H35,0/32D R	J.4				
3064940000 WF PLATE 2	I.11	9004810000 BLOCKBATTERIE 9V	G.11	9013560000 HTF RSV 16	D.6	9019330000 H35,0/39D R	J.4				
3064950000 WF PLATE 3	I.11	9004810000 BLOCKBATTERIE 9V	G.12	9013560000 HTF RSV 16	D.29	9019340000 H50,0/36D BL	J.4				
<b>30900000000</b>		9004900000 H0,75/16 ZH W SV	J.8	9013600000 PZ ZH 16	D.6	9019400000 H50,0/41D BL	J.4				
3093050000 TS LD C20	B.11	9004910000 H1,0/19 ZH GE SV	J.8	9013600000 PZ ZH 16	D.14	9019410000 H5,0/14D W SV	J.5				
3093070000 TS LD C30	B.11	9004920000 H1,5/20 ZH R SV	J.8	9013600000 PZ ZH 16	J.3	9019420000 H10,0/140 R SV	J.5				
<b>31000000000</b>		9004930000 H6,0/23 ZH SW SV	J.8	9013610000 PZ ZH 16 ZERT	D.14	9019430000 H15,0/140 SW SV	J.5				
3103020000 TSLD C40	B.11	9004940000 H10,0/24 ZH EB SV	J.8	9013690000 CTX CM 1.6/2.5 ZERT	D.22						
<b>42900000000</b>		9005000000 STRIPAX	C.4	9013960000 ERME 110 PDT	D.43						
4294820000 1/4" HANDGRIFF	F.17	9005140000 H0,75/16T ZH HBL SV	J.8	9013970000 PUNCH DOWN TOOL PDT	D.43						
<b>88000000000</b>		9005150000 H2,5/21 ZH GR SV	J.8	9013980000 ERME 66 PDT	D.43						
8808420000 IE-CT	G.14	9005160000 H6,0/23T ZH GN SV	J.8	9013990000 ERME 630 PDT	D.43						
<b>90000000000</b>		9005170000 H10,0/26T ZH BR SV	J.8	9014000000 ERME LSA PLUS STANDARD	D.43						
9005180000 WF PLATE 1	I.11	9005180000 H0,14/10 GR SV	J.5	9014050000 ERME LSA PLUS SCHERE	D.43						
9005610000 STRIPAX 16	C.4	9005610000 STRIPAX 16	C.4	9014100000 HTN 21 AN	D.7						
9005720000 CST VARIO	C.15	9005720000 CST VARIO	C.15	9014100000 HTN 21 AN	D.20						
9005730000 MESSEREINSATZ CST VARIO	C.15	9005740000 MESSERHALTER CST VARIO	C.15	9014140000 HTF DFF	D.29						
9005750000 EINSTELLBLOCK CST	C.15	9005760000 EINSTELLBLOCK CST	C.14	9014350000 PZ 6 ROTO	D.6						
9005800000 H0,5/14 R BD GSP	J.6	9005810000 H0,5/14 R BD GSP	J.6	9014350000 PZ 6 ROTO	D.11						
9005820000 H0,75/14 W BD GSP	J.6	9005830000 H1,0/14 GE BD GSP	J.6	9014350000 PZ 6 ROTO	J.3						
9005840000 H1,5/14 R BD GSP	J.6	9005850000 H2,5/14D BL BD GSP	J.6	9014400000 HTI 15	D.20						
9005860000 H0,5/140 W BD GSP	J.6	9005870000 H0,75/14 GR BD GSP	J.6	9014400000 HTI 15	J.3						
9005880000 H1,0/140 R BD GSP	J.6	9005890000 H1,5/140 SW BD GSP	J.6	9014400000 HTI 15	D.20						
9005900000 H0,75/14T BL BD GSP	J.6	9005910000 H0,75/14T GR BD GSP	J.6	9014610000 HTN 21	D.7						
9005920000 PZ 1.5	D.6	9005930000 PZ 1.5	D.6	9014610000 HTN 21	D.20						
9006020000 SWIFTY	F.19	9006020000 SWIFTY	F.19	9014680000 HTF ZRV	D.6						
9006120000 CT16	D.7	9006120000 CT16	D.19	9014720000 HTF ZRV	D.29						
9006160000 CT16	J.3	9006170000 CT16	D.19	9014720000 HTF ZERT	D.12						
9006220000 CTN 25 D4	D.7	9006230000 CTN 25 D5	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006230000 CTN 25 D5	D.7	9006240000 CTN 25 D5	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006250000 CTN 25 D	D.21	9006260000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006260000 CTN 25 D	D.21	9006270000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006270000 CTN 25 D	D.21	9006280000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006280000 CTN 25 D	D.21	9006290000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006290000 CTN 25 D	D.21	9006300000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006300000 CTN 25 D	D.21	9006310000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006310000 CTN 25 D	D.21	9006320000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006320000 CTN 25 D	D.21	9006330000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006330000 CTN 25 D	D.21	9006340000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006340000 CTN 25 D	D.21	9006350000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006350000 CTN 25 D	D.21	9006360000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006360000 CTN 25 D	D.21	9006370000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006370000 CTN 25 D	D.21	9006380000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006380000 CTN 25 D	D.21	9006390000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006390000 CTN 25 D	D.21	9006400000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006400000 CTN 25 D	D.21	9006410000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006410000 CTN 25 D	D.21	9006420000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006420000 CTN 25 D	D.21	9006430000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006430000 CTN 25 D	D.21	9006440000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006440000 CTN 25 D	D.21	9006450000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006450000 CTN 25 D	D.21	9006460000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006460000 CTN 25 D	D.21	9006470000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006470000 CTN 25 D	D.21	9006480000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006480000 CTN 25 D	D.21	9006490000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006490000 CTN 25 D	D.21	9006500000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006500000 CTN 25 D	D.21	9006510000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006510000 CTN 25 D	D.21	9006520000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006520000 CTN 25 D	D.21	9006530000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006530000 CTN 25 D	D.21	9006540000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006540000 CTN 25 D	D.21	9006550000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006550000 CTN 25 D	D.21	9006560000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006560000 CTN 25 D	D.21	9006570000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006570000 CTN 25 D	D.21	9006580000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006580000 CTN 25 D	D.21	9006590000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006590000 CTN 25 D	D.21	9006600000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006600000 CTN 25 D	D.21	9006610000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006610000 CTN 25 D	D.21	9006620000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006620000 CTN 25 D	D.21	9006630000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006630000 CTN 25 D	D.21	9006640000 CTN 25 D	D.21	9014730000 CTN 25 D4 ZERT	D.21						
9006640000 CTN 25 D	D.21	9006650000 CTN 25 D	D.21	9014730000 CTN 2							

Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page	Order No.	Type	Page
9025950000	H1.0/16 GE	J.4	9037550000	H6.0/230 ZH GE	J.7	9200620000	LIF 2,5T638 R	J.23	9204950000	KOS PG 13/M20	B.16
9025960000	H0,75/14 SW	J.10	9037560000	H6.0/290 ZH GE	J.7	9200630000	LIF 6T638 R	J.23	9204960000	KOS-PG16	B.14
9025970000	H1.0/14S GE	J.10	9037570000	H10.0/240 ZH R	J.7	9200640000	LIF 1,5F638 RF	J.22	9204960000	KOS-PG16	B.16
9025980000	H1.5/14S R	J.10	9037580000	H10.0/300 ZH R	J.7	9200650000	LIF 2,5F638 RF	J.22	9204970000	KOS-PG21	B.14
9026010000	H4,0/18 GR SV	J.5	9037590000	H16.0/290 ZH BL	J.7	9200660000	LIF 6F638 RF	J.22	9204970000	KOS-PG21	B.16
9026030000	H0,34/10 TK SV	J.5	9037600000	H16.0/380 ZH BL	J.7	9200670000	LID 1,5M4 R	J.24	9204980000	KOS-PG29	B.14
9026050000	H0,25/10 HBL SV	J.5	9037610000	H0,75/14T ZH HBL	J.7	9200680000	LID 2,5M5 R	J.24	9204990000	KOS-PG36	B.14
9026060000	H0,5/14 OR SV	J.5	9037620000	H0,75/16T ZH HBL	J.7	9200690000	LID 6M5 R	J.24	9205000000	KOHS 9.5+19	B.14
9026070000	H0,75/14W SV	J.5	9037630000	H0,75/24T ZH HBL	J.7	9200700000	LID 1,5F4 RF	J.24	9205000000	KOHS 9.5+19	B.15
9026080000	H1,0/14 GE SV	J.5	9037640000	H2,5/19T ZH GR	J.7	9200710000	LID 2,5F5 RF	J.24	9205010000	KOHS 19	B.14
9026090000	H1,5/14 R SV	J.5	9037650000	H2,5/21T ZH GR	J.7	9200720000	LID 6,0F5 RF	J.24	9205010000	KOHS 19	B.15
9026100000	H2,5/15 BL SV	J.5	9037660000	H2,5/27T ZH GR	J.7	9201040000	HTP AFK 2.5	D.6	9205020000	KOPD 10.0	B.15
9027310000	CRIMPPFX LZ	I.24	9037670000	H0,4/22T ZH OR	J.7	9201040000	HTP AFK 2.5	D.29	9205030000	KOBBS 9.5X50	B.14
9028200000	H70,0/37 GE	J.4	9037680000	H4,0/28T ZH OR	J.7	9201310000	BATTERIE 1,5V MICRO	G.6	9205030000	KOBBS 9.5X50	B.16
9028210000	H95,0/44 R	J.4	9037690000	H6,0/23T ZH GN	J.7	9201310000	BATTERIE 1,5V MICRO	G.7	9205040000	KOBBS 19X55	B.14
9028220000	H120,0/50 BL	J.4	9037700000	H6,0/29T ZH GN	J.7	9201310000	BATTERIE 1,5V MICRO	G.15	9205040000	KOBBS 19X55	B.16
9028230000	H150,0/54 GE	J.4	9037710000	H10,0/24T ZH BR	J.7	9201310000	BATTERIE 1,5V MICRO	G.16	9205130000	SEE ESD 120	E.11
9028240000	H0,14/12 GR SV	J.5	9037720000	H10,0/30T ZH BR	J.7	9201430000	ZUB SLICER NO16-35	C.17	9205140000	SVESE ESD 130	E.11
9028250000	H0,14/10T BR SV	J.5	9037730000	H16,0/29T ZH W	J.7	9202000000	KOFFER CARRY LITE 55	H.43	9205150000	SUPER CUT	E.12
9028260000	H0,5/12 OR SV	J.5	9037740000	H16,0/38T ZH W	J.7	9202010000	KOFFER PSC5-01 PP	H.44	9205210000	KOF SET ESD	E.12
9028270000	H0,5/16 OR SV	J.5				9202020000	EINSATZ A9-1 CL55	H.41	9205260000	ZUB TEMPHASER	G.11
9028280000	H0,75/12 W SV	J.5				9202210000	MULTI-STRIPAX 6-16	C.10	9205260000	ZUB TEMPHASER	G.13
9028290000	H0,75/16 W SV	J.5				9202220000	MULTI-STRIPAX 16 SL	C.10	9205270000	ZUB MULTIMETER	G.12
9028300000	H0,75/18 W SV	J.5				9202230000	MULTI-STRIPAX AWG	C.10	9205270000	ZUB MULTIMETER	G.13
9028310000	H1,0/12 GE SV	J.5	9041600000	SLICER 2K	B.18	9202250000	MULTI-STRIPAX ASI	C.10	9205320000	IE-CT-SC-GOF	D.7
9028320000	H1,0/16 GE SV	J.5	9046230000	H2,5/14S BL SV	J.10	9202260000	AIE MULTI-STRIPAX 6-16	C.11	9205320000	IE-CT-SC-GOF	D.24
9028340000	H1,0/18 GE SV	J.5	9046280000	KBZ 160	E.3	9202270000	AIE MULTI-STRIPAX 16 SL	C.11	9205330000	IE-CT-LC-GOF	D.7
9028350000	H1,5/16 R SV	J.5	9046300000	KBZ 200	E.3	9202280000	AIE MULTI-STRIPAX AWG	C.11	9205330000	IE-CT-LC-GOF	D.24
9028360000	H1,5/14DS SW SV	J.10	9046310000	SE HD 140	E.4	9202300000	AIE MULTI-STRIPAX ASI	C.11	9205340000	IE-CT-SC-POF	D.7
9028420000	EINSATZ A8-2 CL55	H.41	9046320000	SE HD 160	E.4	9202310000	EINSATZ BA8-PSC 80	H.42	9205340000	IE-CT-SC-POF	D.24
9028450000	EINSATZ A7-1 CL55	H.41	9046330000	SE HD 180	E.4	9202320000	EINSATZ BA7-PSC 80	H.42	9205350000	IE-CT-SC-GOF-P	D.7
9028460000	EINSATZ A8-1 CL55	H.41	9046340000	SE TOP	E.4	9202330000	KOFFER PSC8 PC	H.43	9205350000	IE-CT-SC-GOF-P	D.24
9028480000	POWERSTRIPPER 16	I.19	9046350000	FZ 160	E.6	9202460000	PRO CASE PREMIUM	H.18	9205400000	LAN TESTER	G.14
9028490000	H2,5/12DS BL	J.10	9046360000	RZ 160	E.6	9202470000	PRO CASE LEER	H.18	9205430000	CTIN CM 1,6/2,5	D.6
9028500000	CRIMPPFX R	I.23	9046370000	FRZ S 160	E.5	9202470000	PRO CASE LEER	H.19	9205430000	CTIN CM 1,6/2,5	D.22
9028510000	POWERSTRIPPER 6,0	I.19	9046380000	FRZ S 200	E.5	9202470000	PRO CASE LEER	H.20	9205440000	CTIN CM 3,6	D.6
9028530000	CRIMPPFX L	I.24	9046390000	FRZ SG 160	E.5	9202470000	PRO CASE LEER	H.21	9205440000	CTIN CM 3,6	D.22
9028540000	CRIMPPFX LS	I.24	9046400000	FRZ SG 200	E.5	9202470000	PRO CASE LEER	H.22	9205460000	ZUB MULTI 1037	G.12
9028580000	H0,75/14DS GR	J.10	9046410000	KSE 160	E.4	9202510000	WK 1/4 C6,3 E6,3	F.13	9205460000	ZUB MULTI 1037	G.13
9028630000	CRIMP-SET P2 4 D	H.35	9046420000	KSE 200	E.4	9202600000	CRIMPSET CT16	H.38	9205670000	MULTI-STRIPAX GKWLW	C.10
9028650000	CRIMP-SET P2 Z	H.35	9046430000	KBZ1 200	E.3	9202610000	CRIMPSET PZ / CTI	H.39	9205770000	AIE MULTI-STRIPAX GKWLW	C.11
9028680000	CRIMP-SET P2 6 ROTOL	H.35	9046440000	AIZ 160	E.7	9202640000	CRIMP-SET KONTAKTE	H.39			
9028690000	CRIMP-SET P2 6 ROTOL D	H.35				9202800000	TT 8 RS MP 8	D.7			
9028700000	CRIMP-SET P2 6 ROTOL LT	H.35				9202800000	TT 8 RS MP 8	D.30			
9028740000	CRIMP-SET P2 6/5	H.36				9202820000	H0,75/19S ZH W	J.7			
9028770000	CRIMP-SET STRIPAX PLUS	H.37				9202830000	H0,75/19DS ZH GR	J.7			
9028780000	CRIMP-SET STRIPAX PLUS D	H.37				9202840000	H0,75/19TS ZH HBL	J.7			
9028790000	CRIMP-SET STRIPAX PLUST	H.37				9202850000	CT16 G	D.7	9427670000	TEMPHASER	G.11
9028850000	CRIMP-SET PZ 50	H.37				9202850000	CT16 G	D.19	9427730000	MULTIMETER C 2608	G.12
9028860000	KOFFER PSC4-01	H.43				9202850000	CT16 G	J.3			
<b>90300000000</b>											
9030600000	AM 12	C.13	9200700000	LIR 1,5M3 V	J.17	9202860000	CTF 63	D.7			
9030500000	CST	C.14	9200800000	LIR 1,5M3,5 V	J.17	9202860000	CTF 63	D.18			
9032060000	SCHA CST	C.14	9200900000	LIR 1,5M4 V	J.17	9202870000	H1,5/24 XS SW	J.9			
9036200000	H2,5/12TS GR	J.10	9201000000	LIR 1,5M5 V	J.17	9202880000	H2,5/24 XS BL	J.9			
9036220000	H2,5/16DS BL	J.10	9201010000	LIR 1,5M6 V	J.17	9202900000	H0,5/16S DR	J.10			
9036240000	H120,0/32	J.12	9201020000	LIR 1,5M8 V	J.17	9202910000	H0,5/16 DS W	J.10			
9036250000	H150,0/32	J.12	9201050000	LIR 2,5M3 V	J.17	9203070000	ERME MULTI-STRIPAX	C.10			
9036260000	H185,0/32	J.12	9201060000	LIR 2,5M3,5 V	J.17	9203100000	ERAN MULTI-STRIPAX	C.10			
9036290000	H00KBLA 0,25-1,5 SW	J.26	9201070000	LIR 2,5M4 V	J.17	9203160000	PRO CASE INSTA	H.19			
9036330000	H00KBLA 1,02-2,5 SW	J.26	9201080000	LIR 2,5M5 V	J.17	9203260000	EINSATZ A9-2 CL55	H.41			
9037200000	H0,5/14 ZH OR	J.7	9201090000	LIR 2,5M6 V	J.17	9203610000	MULTI-STRIPAX 0,75-4 SL	C.10			
9037210000	H0,5/16 ZH OR	J.7	9201200000	LIR 6M5 V	J.17	9203700000	ERME AM 16	C.12			
9037220000	H0,5/18 ZH OR	J.7	9201220000	LIR 6M6 V	J.17	9203720000	LIR 1,5M3 V	J.18			
9037230000	H0,75/14 ZH W	J.7	9201230000	LIR 6M7 V	J.17	9203730000	AIE MULTI-SPLX 0,75-4'SL	C.11			
9037240000	H0,75/24 ZH W	J.7	9201240000	LIR 6M8 V	J.17	92040450000	MULTI-STRIPAX 0,25-1,5 S	C.11			
9037260000	H1,0/15 ZH GE	J.7	9201300000	LIS 1,5M4 V	J.18	9204550000	AIE M-SPLX 0,25-1,5 S	C.11			
9037270000	H1,0/19 ZH GE	J.7	9201320000	LIS 1,5M5 V	J.18	9204560000	MULTI-STRIPAX 1,5-6,0 S	C.10			
9037280000	H1,0/25 ZH GE	J.7	9201330000	LIS 1,5M6 V	J.18	9204740000	ERME AM 16	C.12			
9037290000	H1,5/16 ZH R	J.7	9201350000	LIS 2,5M3 V	J.18	9204750000	SEE ESD 125	E.11			
9037300000	H1,5/20 ZH R	J.7	9201360000	LIS 2,5M3,5 V	J.18	9204760000	FZE ESD 130	E.11			
9037310000	H1,5/26 ZH R	J.7	9201370000	LIS 2,5M4 V	J.18	9204770000	ERAN 10X5,5	E.11			
9037320000	H6,0/23 ZH SW	J.7	9201380000	LIS 2,5M5 V	J.18	9204780000	KOBBS 19X75	B.14			
9037330000	H6,0/29 ZH SW	J.7	9201390000	LIS 2,5M6 V	J.18	9204790000	KOBBS 19X75	B.16			
9037340000	H10,0/24 ZH EB	J.7	9201400000	LIS 6M4 V	J.18	9204790000	IE-EKK-V5	B.16			
9037350000	H10,0/30 ZH EB	J.7	9201420000	LIS 6M5 V	J.18	9204810000	KOK-46X46	B.16			
9037360000	H16,0/29 ZH GN	J.7	9201430000	LIS 6M6 V	J.18	9204820000	KOK-52X36	B.16			
9037370000	H16,0/38 ZH GN	J.7	9201440000	LIS 6M8 V	J.18	9204830000	KOK-65X36	B.16			
9037380000	H0,5/14D ZH W	J.7	9201450000	LIS 6M10 V	J.18	9204840000	KOK-68X68	B.16			
9037390000	H0,5/16D ZH W	J.7	9201460000	LIP 1,5R12 V	J.19	9204850000	KOK-86X36	B.16			
9037400000	H0,5/18D ZH W	J.7	9201470000	LIP 2,5R12 V	J.19	9204860000	KOK-91X36	B.16			
9037410000	H0,75/14D ZH GR	J.7	9201480000	LIP 6R14 V	J.19						


## Addresses worldwide

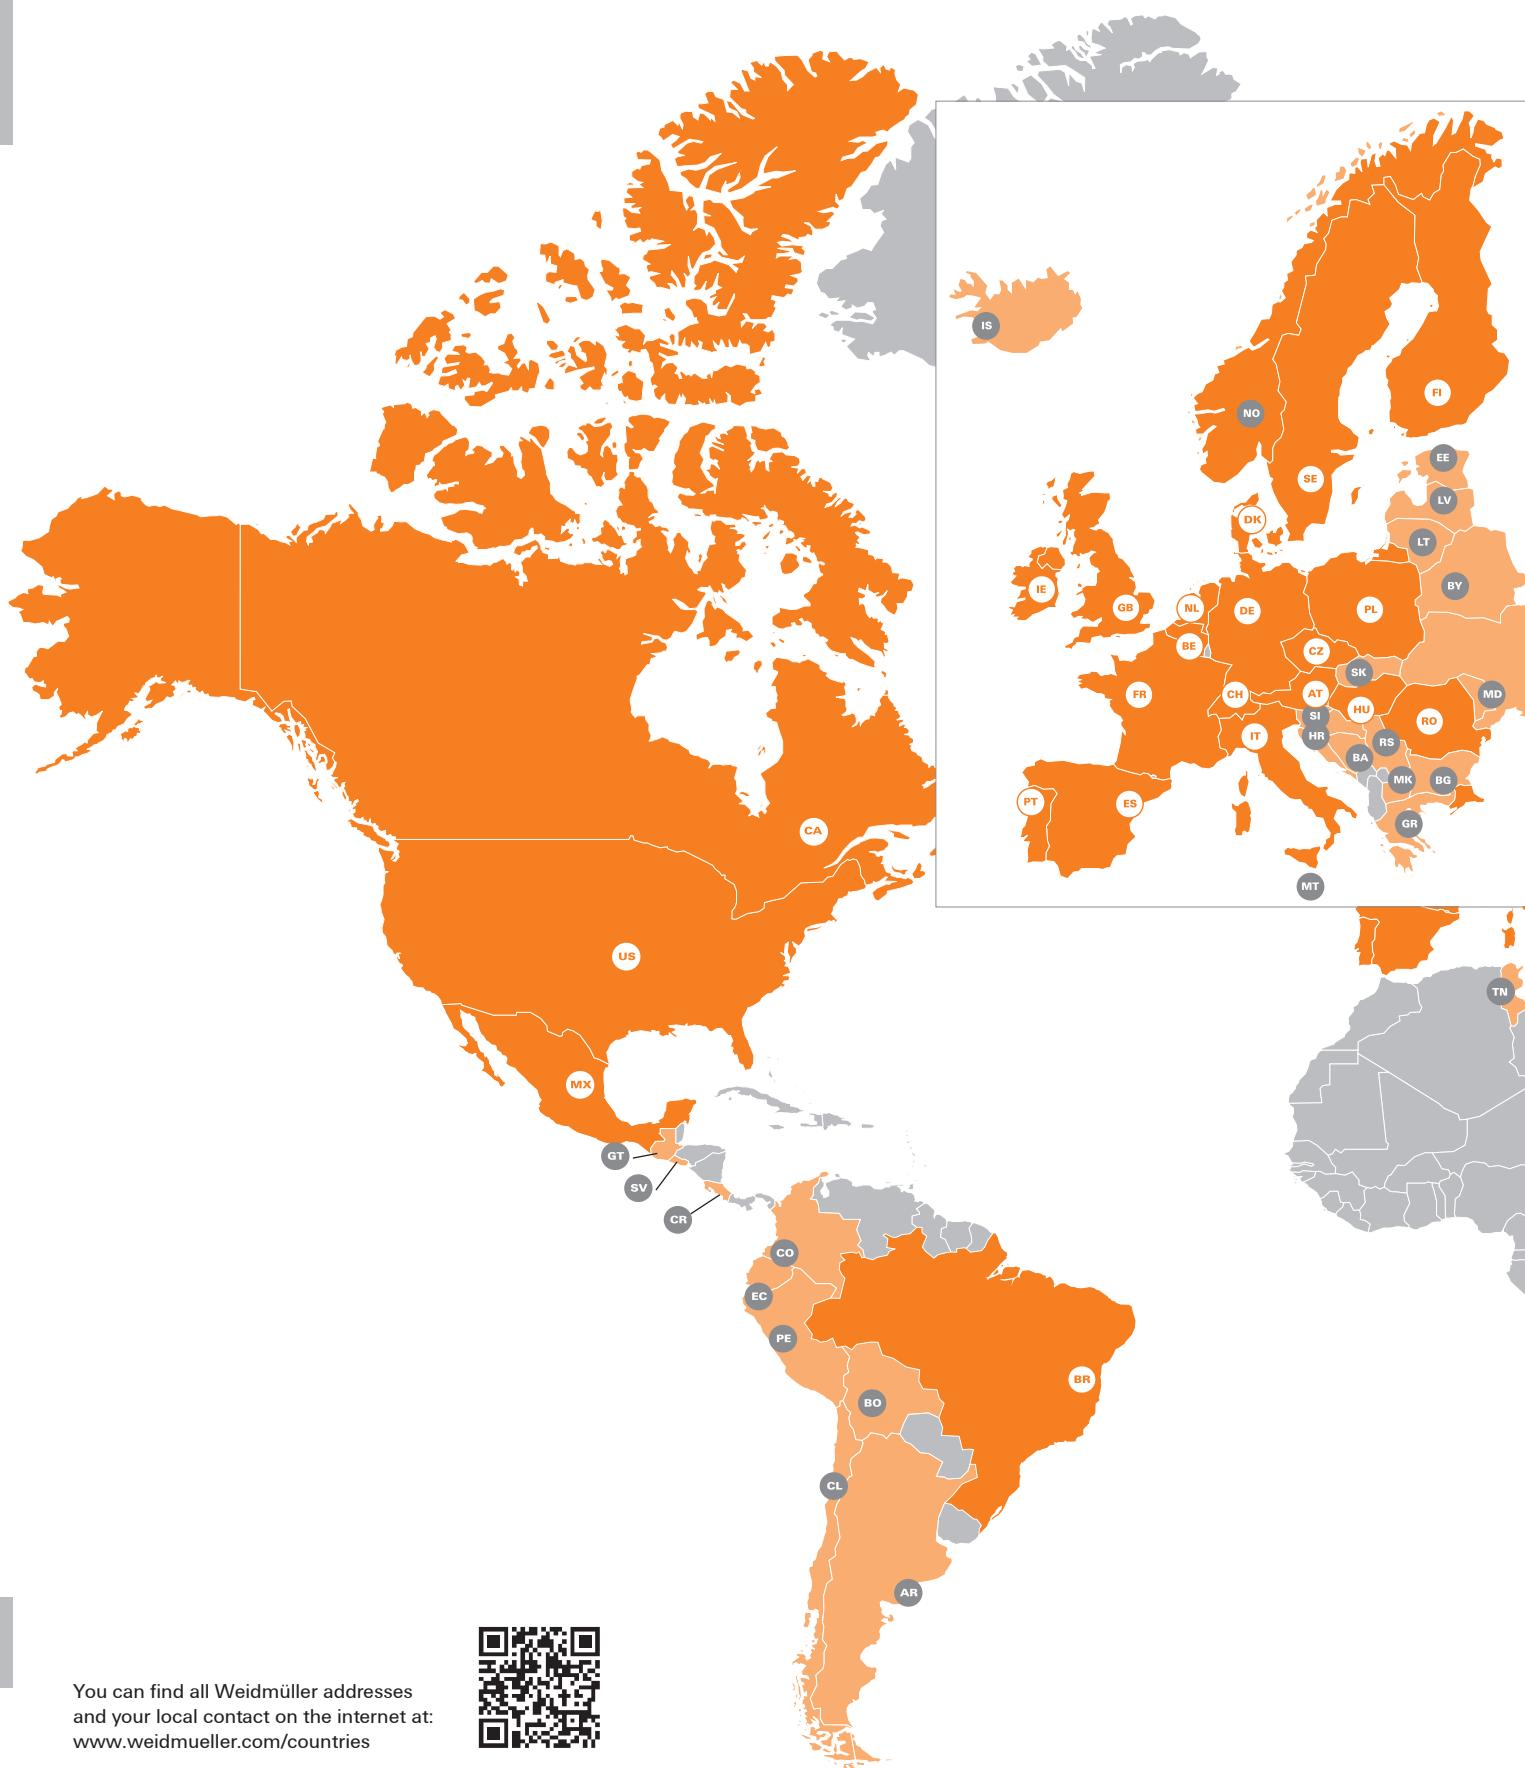

X

You can find all Weidmüller addresses  
and your local contact on the internet at:  
[www.weidmueller.com/countries](http://www.weidmueller.com/countries)



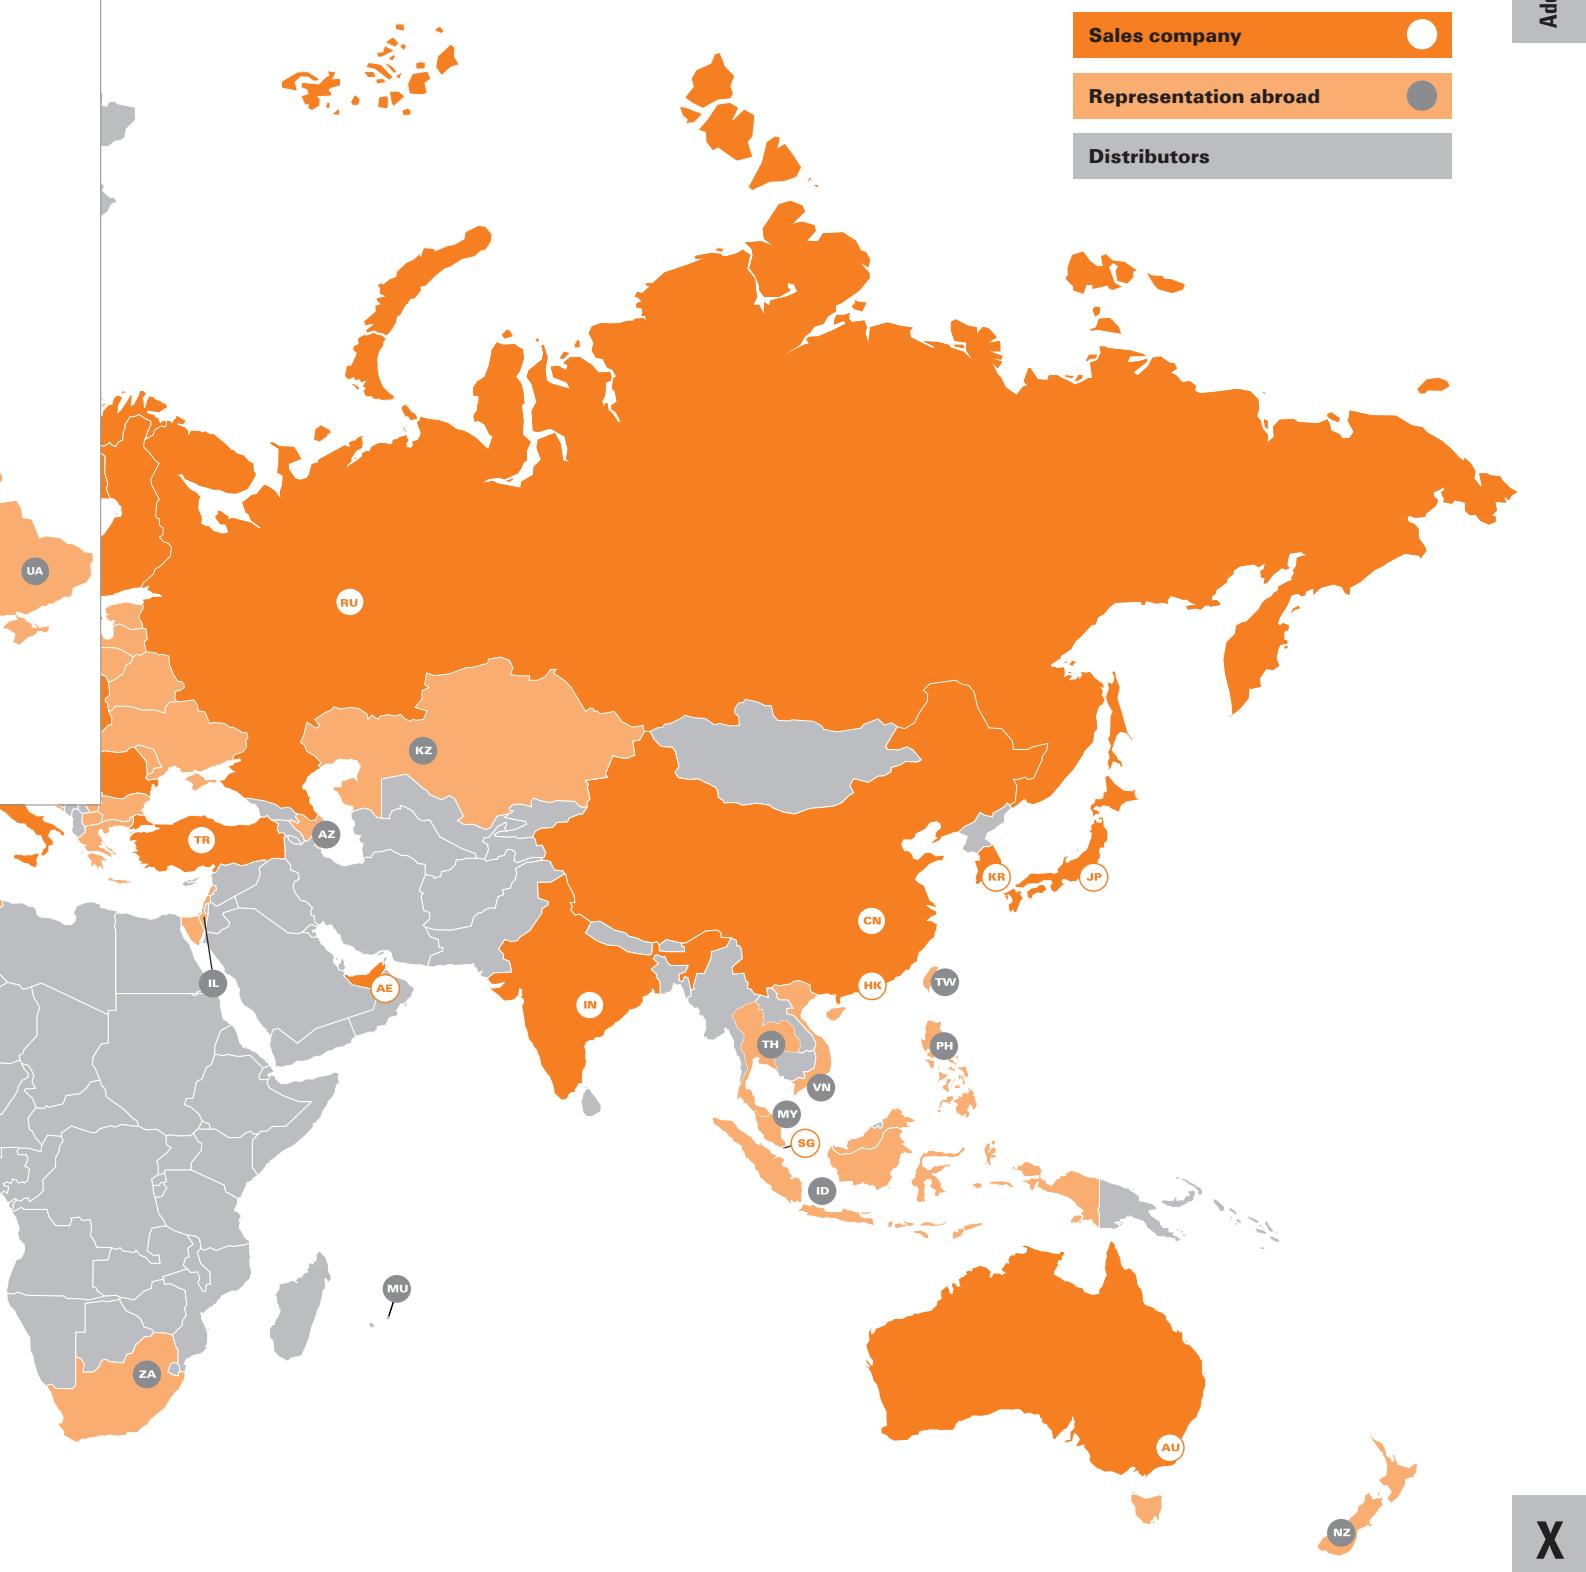

We cannot guarantee that there are no mistakes in the publications or software provided by us to the customer for the purpose of making orders. We try our best to quickly correct errors in our printed media.

All orders are based on our general terms of delivery, which can be reviewed on the websites of our group companies where you place your order. On demand we can also send the general terms of delivery to you.

**Imprint:** Weidmüller Interface GmbH & Co. KG, Klingenbergsstraße 26, 32756 Detmold, Tel.: +49 5231 14280, E-Mail: [weidmueller@weidmueller.de](mailto:weidmueller@weidmueller.de), [www.weidmueller.de](http://www.weidmueller.de) | Limited partnership (KG), Registered office: Detmold, Register court Lemgo HRA 2790 | General partner: Weidmüller Führungsgesellschaft mbH, Registered office: Detmold, Register court Lemgo HRB 3924, VAT ID no.: DE124599660 | Corporate Executive Management: Dr. Timo Berger, Dr. Sebastian Durst, André Sombecki



**Weidmüller – Your partner in Smart Industrial Connectivity**

As experienced experts we support our customers and partners around the world with products, solutions and services in the industrial environment of power, signal and data. We are at home in their industries and markets and know the technological challenges of tomorrow. We are therefore continuously developing innovative, sustainable and useful solutions for their individual needs. Together we set standards in Smart Industrial Connectivity.

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
32758 Detmold, Germany  
T +49 5231 14-0  
F +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

Personal support can  
be found on our website:  
[www.weidmueller.com/contact](http://www.weidmueller.com/contact)

Made in Germany



4 099987 017121

Order number: 3043610000/12/2024/SMD